

SJ PRPC







PHENOLIC GAUGE

Phenolic Pressure Gauge

Model: PRPC

Product Description

- Phenolic case is resistant to heat and high acid, and also provides good insulation
- Solid barrier on the front and pressure relief system on the back for safer measuring



Product Specification

Connection location

Bottom mount, back mount

Nominal size

115 mm

Scale ranges

0 ... 6 kPa to 0 ... 100 MPa, or other equivalent units of pressure, vacuum or compound

Accuracy

±1.0% F.S., ±1.6% F.S., ±2.5% F.S.

Process connection

316L SS 1/4", 3/8", 1/2" PT, G, NPT

Case

Phenol, with solid baffle wall (solidfront) and blow-out back

Window

Safety glass

Dial

Aluminum alloy, black scale on white

Pointer

Black aluminum alloy

Movement

304 SS

Bourdon tube

316L SS



Product Specification

Accessories (options)

Silicone dampened movement


Ambient temperature

-20 °C ... 60 °C


Medium temperature

-20 °C ... 100 °C

Dimensions

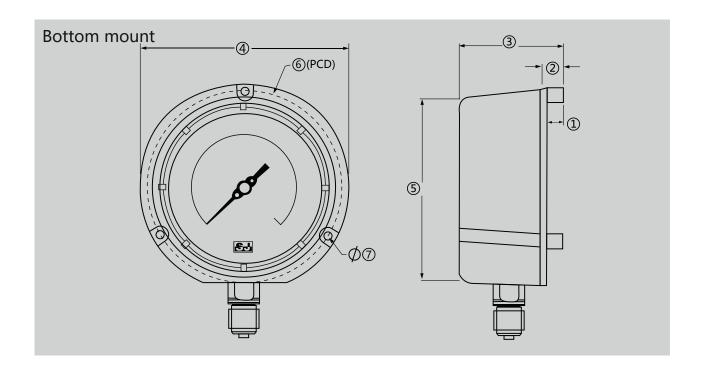

Dimensions (mm)							
NS	1	2	3	4	5	6	7
115	11.5	12.5	83	151	141	119	8

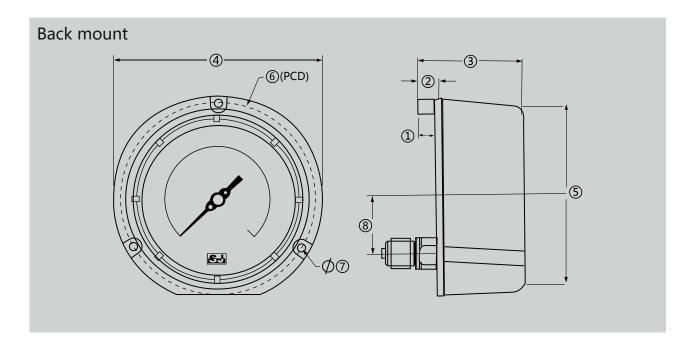

Dimensions (mm)								
NS	1	2	3	4	(5)	6	7	8
115	11.5	12.5	83	151	141	119	8	30.5

X Ordering information:

Model / Connection location / Scale range / Accuracy / Process connection / Accessories / Options

For any changes to the specifications of this catalogue, the latest version shall prevail.







MEXICO BRANCH OFFICE

Roberto Diaz No. 401 Ciudad Industrial Aguascalientes, Ags. México 20290

(449) 171 3420 www.4ManPro.com/SPA/



USA BRANCH OFFICE Pennzoil Place 700 Milam Suite 1300 Houston, Tx, USA 77002

+1 (832) 871 5022 www.4ManPro.com/ENG/

Aemonto For Manufacturing Processes

For any changes to the specifications of this catalogue, the latest version shall prevail. Copyright © 12/2019 by SIN JIA ENTERPRISE COMPANY LIMITED. All rights reserved.

