

# SERVO MANUFACTURA INTELIGENTE







MESA CRUZADA CON DESPLAZAMIENTO HIDRÁULICO REFORZADA

### **About Delta**







Yancey Hai Chairman

### **Corporate Mission**

To provide innovative, clean, and energy-efficient solutions for a better tomorrow

Delta was founded in 1971. Delta offers energy efficient power products, switching power supplies with efficiency over 90%, telecom power with up to 98%, and PV inverters with up to 98.8% efficiency. We have also developed the world's first server power supply certified as 80 Plus Titanium. We regularly invest 6% to 7% of our annual sales revenues in R&D and have worldwide R&D facilities in China, Europe, India, Japan, Singapore, and the U.S.

Delta is a frequent recipient of international awards and related recognition for innovation, design, energy management and corporate social responsibility. Since 2011, Delta has been selected each year for the prestigious Dow Jones Sustainability™ World Index (DJSI World Index). In 2018, we were also included in the DJSI Emerging Markets Index for the 6th consecutive year. In 2016-2017, Delta was ranked by CDP (formerly the Climate Disclosure Project) at the Climate Change Leadership Level.



### **About Delta Industrial Automation (IABG)**

Since the debut of our AC motor drive in 1995, Delta continues to develop our industrial automation business, providing superior quality, reliability and precision. Our range of complete smart manufacturing solutions covers equipment automation, automated production line design and integration, equipment IIoT and data collection, as well as manufacturing management and monitoring to maximize productivity and stabilize production. Delta applies AI and big data analysis to optimize production processes and implement digitalization for equipment, production lines and energy usage. With automation products, software, and system solutions integrated into an all-in-one digitalized smart manufacturing model of factory, processes, and equipment, Delta provides numerous production models, including customized, small volume and wide variety, and mass production for customers on a global scale.

With robust R&D capability and abundant industry experience, Delta offers industrial automation products and solutions that find application in a broad range of industries, including electronics, components, photoelectric panels and food & beverages. We are dedicated to providing innovative and reliable smart, green manufacturing solutions for global customers, keeping our promise of "Automation for a Changing World".

### **Delta IABG Milestones**



### **IABG** Profile

- Mission: To elevate the living environment through advanced automation technology with value-added innovation
- Headquarters in Taoyuan, Taiwan
- Founded in 1995
- Manufacturing and R&D technology centers in Taiwan (Taoyuan, Chungli, Taichung, Tainan), China (Shanghai, Wujiang), and India (Hosur)
- Number of employees: 7,240 (R&D 1,065)







## **TABLE OF CONTENTS**

AC Motor Drive	1
High Performance/Standard Compact Drive New MH300/MS300	1
Sensorless Vector Control Compact Drive VFD-E/EL	2
Economy Vector Control Drive C200	3
Vector Control Drive New C2000 Plus	4
Fan/Pump Vector Control Drive CP2000	5
IP55 Fan/Pump Drive New CFP2000	6
Heavy Duty Vector Control Drive CH2000	7
Textile Vector Control Drive CT2000	8
Elevator Drive VFD-ED	9
Compact Elevator Drive New MH300-L	9
Door Control Drive VFD-DD	11
Integrated Elevator Drive	12
Hybrid Energy Saving System HES	14
Power Regenerative Unit————————————————————————————————————	15
Power Quality Solution	
Active Front End AFE2000	16
Static Var Generator SVG2000	16
Active Power Filter	17

Industrial Motion Control	18
AC Servo Drives and Motor	
AC Servo Drive	
ASDA-A3 New	18
ASDA-A2	20
ASDA-A2-E	22
ASDA-B2	24
ASDA-M	26
Spindle Motor Drive  ASDA-S	28
IPM Spindle Motor ECMS	28
Actuator	
Linear Motion Drive  ASDA-A2R	29
Ironless Linear Motor ———————————————————————————————————	29
Linear Shaft Motor  ECML-S	30
Linear Stage	
LU	
LA-S	32
Gearbox	
Planetary Gearbox ————————————————————————————————————	33
PC-Based Motion Controller	
PC-Based Motion Controller (PAC) MH1/MH2 New / MP1	34
Delta High-Speed Motion Control System  DMCNET	36
EtherCAT High-Speed Motion Control System	38

CODESYS SoftPLC Platform New -



CNC Solution	
Open CNC Solution NC E	41
CNC Solution	42
Robot Controller	
Robot Controller with Servo Drive Integrated ASDA-MS	43
Controller with Human Machine Interface	
7-inch Controller with Widescreen Handheld HMI————————————————————————————————————	45
7-inch Controller with Handheld HMI HMC08-N500S52	45
8-inch Controller with HMI HMC08-N500S52	45
Controller	47
Programmable Logic Controller	
Hot Swappable Mid-range PLC ———————————————————————————————————	47
Compact Modular Mid-range PLC ———————————————————————————————————	51
High Performance PLC DVP-EH3	53
Standard PLC/Analog I/O PLC ———————————————————————————————————	54
Advanced Network Type Slim PLC ———————————————————————————————————	54
High Performance Slim PLC ———————————————————————————————————	55
Standard Slim PLC ———————————————————————————————————	56
Advanced Slim PLC DVP-SA2	56
Analog I/O Slim PLC ———————————————————————————————————	56
Multi-axis Motion Controller	57

DVP-10MC/15MC/50MC New

	General Motion Controller  DVP-PM	58
Hu	ıman Machine Interface	
	Advanced Multimedia HMI New DOP-112MX (12-inch) / DOP-115MX (15-inch)	59
	Advanced HMI New DOP-103WQ (4.3-inch) / DOP-107WV (7-inch) / DOP-110WS (10-inch) / DOP-112WX (12-inch) DOP-115WX (15-inch)	
	Standard Ethernet HMI New DOP-107EV (7-inch) / DOP-107EG (7-inch)	61
	Standard HMI New DOP-107CV (7-inch) / DOP-110CS (10-inch)	62
	Basic HMI New DOP-103BQ (4.3-inch) / DOP-107BV (7-inch)	62
	WinCE HMI DOP-W105B (10-inch) / DOP-W127B (12-inch) / DOP-W157B (15-inch)	63
	Widescreen Handheld HMI  DOP-H07 (7-inch)	64
Tex	xt Panel HMI	
	4-Line Text Panel HMI TP04G-AL-C/TP04G-AL2/TP04G-BL-C	65
	8-Line Text Panel HMI TP08G-BT2	65
To	uch Panel HMI with Built-in PLC	
	7-Inch Touch Panel HMI with Built-in PLC TP70P-RM0/TP70P	66
	4-Line Text Panel HMI with Built-in PLC TP04P	66
S	Sensor/Process Controller/Field Device	67
Se	ensor	
	Photoelectric Sensor PS-R/PS-F/PS-L/PS-M	67
	Inductive Proximity Sensor	67
	Laser Displacement New	68



Area Sensor New AS-B (Standard/Communication)/AS-E	68
Rotary Encoder	
Rotary Encoder ES/EH/HS/HH	69
Barcode Scanner	
Handheld Barcode Scanner New DAH1000S/DAH2000	70
Fixed-mount Barcode Scanner New DFS131 Series	71
Vision Sensor	
Vision Sensor New VIS Series	72
Temperature Controller	
Advanced Intelligent Temperature Controller - DT3	73
Intelligent Temperature Controller DTK	75
Standard Temperature Controller DTA	75
Advanced Temperature Controller	75
Modular Temperature Controller	76
Valve Controller DTV	76
Multi-Channel Modular Temperature Controlled DTE	r ————76
Pressure Sensor/Flow Switch	
Standard Multifunction Pressure Sensor DPA	77
Basic Multifunction Pressure Sensor  DPB	77
Flow Switch New DFM	78

Timer/Counter/Tachometer/Valve Controlle Timer/Counter/Tachometer CTA	r 78
Power Meter	
Multifunction Power Meter DPM-C530/DPM-C530E New/DPM-C520/DPM-C520W/DPM-C501L/DPM-C502 New	DPM-C310 New / DPM-D520I /
Machine Vision	81
Machine Vision System	
DMV2000	81 83
DMV1000	
Industrial Power Supply	85
DIN Rail Power Supply CliQ/CliQ II/CliQ III/CliQ M/Lyte/Chrome/Sync/DVP	85
Panel Mount Power Supply PMC/PMF/PMH/PMR/PMT/PMU	86
Open Frame Power Supply PJ/PJB/PJH New/PJT/PJU	86
Networking	87
Industrial Ethernet Solution	
Layer 3 Managed Switch New DVS-G928W01	87
Managed Switch ————————————————————————————————————	
PoE+ Managed Switch  DVS-G512	
Unmanaged Switch ————————————————————————————————————	90
PoE+ Unmanaged Switch  DVS-G408W01/DVS-G406W01-2GF	90
Ethernet-to-Fiber Media Converter  DVS-G002100-TF	91



	SFP Fiber Transceiver  LCP-GbE/LCP-1FE	-91
	PoE+ Splitter  DVS-G401	-92
	PoE+ Injector ————————————————————————————————————	-92
	IEEE 802.11 WLAN DVW-W02W2-E2	92
	High-gain Antenna ———————————————————————————————————	-93
	Industrial 3G Cloud Router  DX-2100RW	-93
	Industrial Ethernet Cloud Router  DX-2300LN	-93
	Industrial 3G/WAN Cloud Router New DX-3001H9	-94
	Industrial 3G/WAN VPN Router  DX-3001H-V	94
Ind	ustrial Fieldbus Solution	
	BACnet MS/TP Slave Module  DVPSCM52-SL	95
	PROFIBUS DP Slave Module  DVPPF02-SL	95
	Ethernet Master Module  DVPEN01-SL	95
	RS-422/485 Master Module  DVPSCM12-SL	95
	CANopen Master Module  DVPCOPM-SL	95
	DeviceNet Master Module  DVPDNET-SL	-95
	Ethernet Remote I/O Communication Module  RTU-EN01	-96
	DeviceNet Remote I/O Communication Module  RTU-DNET	-96
	PROFIBUS DP Remote I/O Communication Module  RTU-PD01	-96

RS-485 Remote I/O Communication Module RTU-485	96
DVP Series Slave Modules (Right-side)  DVPCP02-H2/DVPPF01-S/DVPPF02-H2/DVPDT01-S/DVPDT02-H2	96
USB Converter UC-PRG015-01A/IFD6500/IFD6503/IFD6530	97
Modbus Serial Converter  IFD8500A/IFD8510A/IFD8520	98
Industrial Network Converter IFD9502/IFD9503/IFD9506/IFD9507	98
Industrial Automation Solutions ————————————————————————————————————	99
Industrial PC/Equipment IoT Platfrom/Software	101
Industrial PC ———————————————————————————————————	101
Equipment IoT Platform  DIALink	103
SCADA System  DIAView	105
Industrial Energy Management System ————————————————————————————————————	106
Robot	107
Delta Articulated Robot  DRV70L/DRV90L	107
SCARA Robot — DRS40L/DRS60L/DRS60H New / DRS70L	109
Global Operations	111



### High Performance / Standard Compact Drive

### MH300/MS300

### **Compact-designed Powerful Multifunction Drives**

### **Optimized Space Utilization**

• Compact design with up to 40% size reduction compared to existing models

### **Outstanding Drive Performance**

- Support both induction and permanent magnet motors
- MS300 series: supports open-loop control
- MH300 series: supports open-loop/closed-loop control

### **Strong System Support**

- High speed models: support up to 1500 Hz (MS300)/ 2000 Hz (MH300) output frequency under open-loop control
- Built-in PLC with 2k steps (MS300); 5k steps (MH300) program capacity
- · Built-in braking choppers for the entire series
- Various communications: EtherCAT, PROFIBUS DP. DeviceNet. Modbus TCP, EtherNet/IP, CANopen

### High Safety, Stability and Reliability

- · Built-in STO (SIL2/PLd) safety function and safety measures for sudden power outages
- Enhanced 100% PCBs conformal coating; compliant with IEC 60721-3-3 class 3C2
- Extended key components lifetime

### Easy to Install, Easy to Use

- A user-friendly and removable 5-digital LED keypad for the MS300 series; LCD keypad equipped with quick setting wheel dial for the MH300 series
- Macro function, quick parameter setting and duplication
- Built-in USB port for monitoring









Power Range	0.2 kW 0.25 HP		0.75 kW 1 HP	1.5 kW 2 HP	2.2 kW 3 HP	3.7 kW 5 HP	5.5 kW 7.5 HP	7.5 kW 10 HP	11 kW 15 HP	15 kW 20 HP	18.5 kW 25 HP	22 kW 30 HP
	150V/1-p	hase										
Standard Moldel MH300 & MS300	230V/1-p	hase										
0~599 Hz	230V/3-p	hase										
		460V/3-	phase									
High Speed Model				230V/1-p	hase							
MH300: 0~2000 Hz	230V/3-phase											
MS300: 0~1500Hz				460V/3-p	hase							

### **Applications**

MH300: Machine tools, textile machines, woodworking machines, rubber & plastic machines and cranes

MS300: Machine tools, textile machines, woodworking machines, packaging machines, electronics, fans, pumps and air compressors



### **Sensorless Vector Control Compact Drive**

VFD-E/EL

### **Small Size with Multifunctions**



- Optional extension modules for more flexible applications
   (High speed fieldbus, braking modules, I/O cards and PG cards for VFD-E Series)
- · Modular fan design for easy maintenance and replacement
- Built-in EMC filter for 230 V single-phase and 460 V three-phase models to effectively minimize the electromagnetic interference
- Built-in RFI Switch for noise suppression (all models)
- Built-in PLC with 500 steps program capacity (VFD-E Series)
- Support common DC BUS. The regenerative braking power is shared by parallel connected AC motor drives to enhance the stability of the DC BUS voltage
- · Support side-by-side installation and DIN-rail mounting
- Built-in PID feedback control, special functions for constant pressure pump
- Built-in RS-485, compatible with MODBUS communication (baud rate up to 38,400 bps)
- VFD-E Series provides two models for selection: CANopen drive with CANopen communication protocol, and the plate drive with no fan and colling fins installed

Power Range	0.2 kW 0.25 HP	0.4 kW 0.5 HP	0.75 kW 1 HP	1.5 kW 2 HP	2.2 kW 3 HP	3.7 kW 5 HP	5.5 kW 7.5 HP	7.5 kW 10 HP	11 kW 15 HP	15 kW 20 HP	18.5 kW 25 HP	22 kW 30 HP
	115V/1-ph	iase										
VED 5	230V/1-ph	iase										
VFD-E	230V/3-ph	iase										
		460V/3-p	hase									
	115V/1-ph	ase										
VFD-EL	230V/1-ph	iase										
	230V/3-ph	iase										
		460V/3-pl	nase									

### **Applications**

Food packaging machines, textile machines, presses, conveyors



### **Economy Vector Control Drive**

C200

### **High Speed Frequency Output**

- · Support both induction and permanent magnet motors
- Built-in PLC with 5k steps program capacity
- · High-speed frequency output (V/F control mode) up to 2,000 Hz
- Flange mount design for Frame A and removable panel to facilitate installation process
- Built-in pulse input terminal with encoder for closed-loop control
- Built-in CANopen and RS-485 (Modbus) communication





Power Range	0.4 kW 0.5 HP	0.75 kW 1 HP	1.5 kW 2 HP	2.2 kW 3 HP	3.7 kW 5 HP	4 kW 5 HP	5.5 kW 7.5 HP	7.5 kW 10 HP
	230 V / 1-phase							
C200	230 V / 3-phase							
		460V/3-phase						

### **Applications**

Food packaging machines, conveyor equipment, textile machines, woodworking machines, fans and water pumps







### **Vector Control Drive**

### C2000 Plus

### For General Drive Controls

- Heavy Duty overload capability: 150 % / 60 sec. and 180 % / 3 sec., suitable for constant torque applications
- Support both induction and permanent magnet motors
- Field-oriented vector control
- Support P2P control
- Wide power range (up to 560 kW for 460 V model)
- · User-friendly Start Wizard
- Display in 9 languages: English, Spanish, Portuguese, French, Russian, Turkish, German, Italian, Traditional/Simplified Chinese
- Built-in PLC with 10k steps program capacity
- Enhanced protections and adaptation with PCB coating, compliant with 3C3 standard
- Modular design for easy maintenance and extension



Now


 Built-in Modbus and optional communication cards: EtherCAT、PROFINET、 EtherNet/IP、PROFIBUS DP、DeviceNet、Modbus TCP、CANopen



Power Range	0.75~3.7 kW 1~5 HP	5.5~18.5 kW 7.5~25 HP	22~37 kW 30~50 HP	45~90 kW 60~125 HP	110~185 kW 150~250 HP	220 ~ 560 kW 300 ~ 750 HP	630 kW 850 HP
	230 V / 3-phase						
C2000 Plus	460 V / 3-phase						
C2000 Plus	575 V / 3-phase	)					
		690	V/3-phase				

### **Applications**

Machine tools, extruders, calender machines, paper machines, compressors, wire drawing machines, packaging machines










### Fan / Pump Vector Control Drive

### CP2000

# Excellent for Large Power Fans and Pumps Applications

- Built-in BACnet and RS-485 (Modbus) communication protocols
- Enhanced conformal coating on PCBs for superior durability in critical environments
- Fire mode and Bypass mode: continuous pressure output to extract smoke when a fire accident or other emergencies occur
- Quick setting functions to support self-defined parameter groups and parameter duplication for fast and easy installation
- Various modes for fans/pumps applications, including PID control, sleep/wake up functions, flying start and frequency-hopping functions
- Built-in LCD keypad is easy-to-use, and the TPEditor software allows users to customize the main page screen
- Multi-pumps synchronous control of up to 8 motors at one time, fixed amount and fixed time circulation control;
   optional relay expansion card
- Built-in PLC with 10k steps program capacity and real-time clock (RTC)
- Optional communication cards: PROFIBUS DP, DeviceNet, Modbus TCP, EtherNet/IP and CANopen

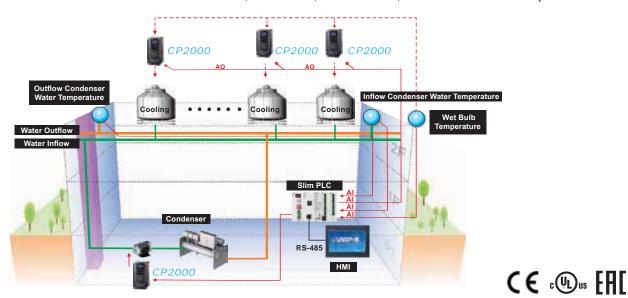



### **Applications**

Factory automation, HVAC, fans and pumps



### IP55 Fan / Pump Drive www

### CFP2000

### For HVAC, Fans and Pumps Applications

- IP55 and IP41 enclosure protections
- Built-in main switch for the IP55 models (optional)
- Built-in Safe Torque Off (STO) SIL2
- Built-in EMC filter; IEC61800-3 C2, C1 standard
- Built-in DC reactor effectively reduces the harmonic distortion; IEC61000-3-12 standard
- Enhanced PCB (Printed Circuit Board) conformal coating improves drive durability; Class 3C3 standard
- 2 sets of PID controllers
- Built-in PLC with 10k steps program capacity and real-time clock (RTC)
- Built-in Modbus and BACnet MS/TP communication
- · Optional communication cards: PROFIBUS DP, DeviceNet, Modbus TCP, EtherNet/IP, CANopen
- Built-in Quick Start function and application groups to simplify installation and setup





Power Range	0.75 ~ 5.5 kW 1 ~ 7.5 HP	11 ~ 22 kW 15 ~ 30 HP	30 ~ 37 kW 40 ~ 50 HP	45 ~ 55 kW 60 ~ 75 HP	75 ~ 90 kW 100 ~ 125 HP
CFP2000	380 to 480V/3-phase				

### **Applications**



**Fans** 





Water Supply & Water Treatment



Chiller

### **Heavy Duty Vector Control Drive**


### CH2000

### Large Overload Capability Excellent for Impact Loading Applications

- · Fast response to impact loads
- Super Heavy Duty (SHD) setting for high overload capability: 150% of rated current for 60 secs and 200% of rated current for 3 secs
- Large starting torque: above 200% at 0.5Hz, and 200% at 0Hz in FOC+PG mode
- Support both induction and permanent magnet motors
- Various crane functions for high operation performance
- · Modular design: easy installation and maintenance
- Built-in PLC with 10k steps program capacity
- · Built-in Modbus communication
- Optional communication cards: PROFIBUS DP, DeviceNet, Modbus TCP, EtherNet/IP, EtherCAT and CANopen



### **Advanced Crane Functions**

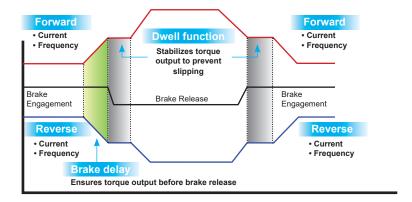

### ▲ Mechanical Brake Control


8 independent brake control settings for different criteria; high flexibility to meet complex application needs and to ensure operation safety

▲ Advanced Crane Time Sequence

Brake delay and dwell function for smooth operation



### **Light Load Acceleration**

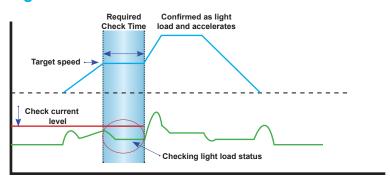



### **Applications**

Machine tools, punching machines, cranes and hoists



Power Range	0.75 ~ 3.7 kW 1 ~ 5 HP	5.5 ~ 18.5 kW 7.5 ~ 25 HP	22 ~ 37 kW 30 ~ 50 HP	45 ~ 75 kW 60 ~ 100 HP	90 ~ 185 kW 125 ~ 250 HP	220 ~ 280 kW 300 ~ 375 HP
	230 V/3-phase					
CH2000	460 V/3-phase					

### **Textile Vector Control Drive**

### CT2000

### **Highly Flexible Flange Mount and Wall Mount Methods**

- Fanless design with highly effective heat sink to prevent fiber and dust from clogging or entering the drive, solving overheating problems(\*1)
- Flange-mount installation to enhance system safety and stability, providing excellent heat dissipation performance(\*1)
- Support external fan connection (optional)<sup>(\*1)</sup>
- Wall-mount installation model with an enlarged fan (\*2)
- Deceleration Energy Backup (DEB) function for smooth motor deceleration control
- Support induction and permanent magnet motors
- · Common DC BUS design
- Built-in PLC with 10k steps program capacity RS-485, support Modbus communication
- Optional communication cards available upon request









**Wall Mount** 






Power Range	11 kW	15 kW	18.5 kW	22 kW	30 kW	37 kW	45 kW	55 kW	75 kW	90 kW
CT2000	460 V / 3-pha	se								

### **Applications**

Textile machines and all textile applications that require flange-mount or wall-mount installation

\* Flange-mount: Please refer to the CT2000 user manual for airway design requirements before installation

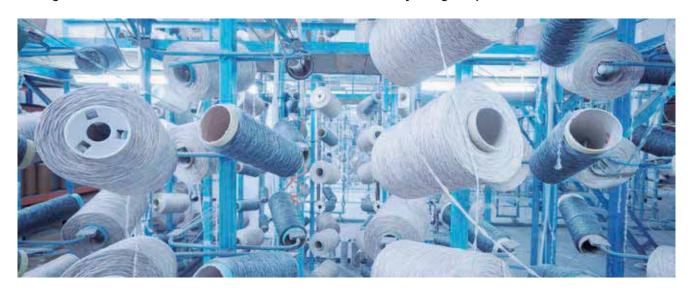



### **Elevator Drive**


### VFD-ED


### **Excellent Time Sequence Control for Smooth Rides**

- Support induction and permanent magnet motors
- · Precise control of S curve performs smooth start and stop for a comfortable ride
- Optional PG feedback cards (for ABZ & Heidenhain encoder)
- Highly precise field-oriented vector control
- · Automatic torque compensation function to prevent elevator from slipping or vibrating
- Emergency operation enabled with UPS or battery when power outage occurs
- Wall-mount or embedded installation
- · Built-in LED digital keypad
- 4 relay output and 2 multi-function digital signal output terminals (MO)
- 2 analog signal input (AI) and 2 analog signal output (AO)
- 1 CANopen and 2 RS-485 (Modbus)

### **Emergency Operation**

- Support single phase 230VAC Uninterrupted Power System (UPS)
- · Automatically determine the light load operation direction when a power outage occurs







CE III cous (UL: does not include VFD22ED21S and VFD037ED21S models)

Power Range	2.2 kW 3 HP					18.5 kW 25 HP			
	230V/1-	phase							
ED			230V/3-	phase					
			460V/3-	phase					

<sup>\*</sup>Min. power range of the 460V model: 4kW



### **Compact Elevator Drive**


### MH300-L

### **New Compact Design with Open Loop Control**





- Support asynchronous motors with open loop control
- Precise control of S curve performs smooth start and stop for a comfortable ride
- Compact design and user-friendly operation
- EPS/ARD and sequence control functions for elevator applications
- Built-in 5-digit 16-segment LCD digital keypad
- Built-in USB connection port
- Built-in EMC filter
- Built-in brake chopper
- 7 digital inputs (extension up to 10) and 1 relay output (extension up to 3)
- Integrated Safe Torque Off (STO) SIL2

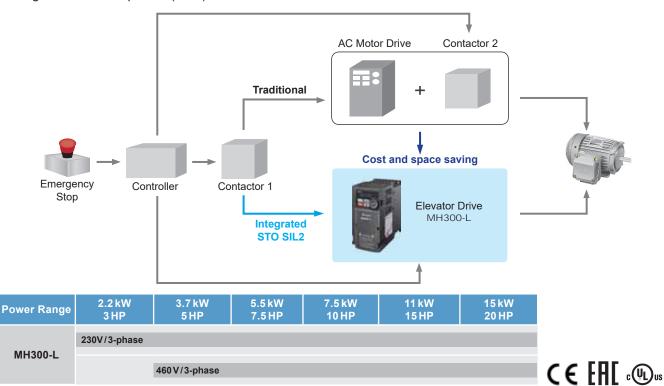



### **Door Control Drive**

### VFD-DD

### **Door Control Solution**

- Compact Design ■ Distance Control Speed Control **■ Multi-step Speed** Mode Mode **Control Mode** 5.5 mm ■ Safety Switch ABELTA ■ Removable **Terminal Blocks** ■ Built-in Digital **Keypad**
- · Simplified elevator door control system
- Support induction and permanent magnet motors
- Easy to install with I/O input/output design
- Various protection functions ensure passenger safety
- · Auto-tuning of door width

- · Auto-positioning when power is applied
- · Smooth door re-open/re-close curve
- Demo mode
- Support elevator door obstruction detection

### **Optional Motors**

**ECMD-B91207MS** ECMD-B91608MS **ECMD-B81610MS** 



### **Applications**

**Elevator doors** 



Power Range	0.2 kW 0.25 HP	0.4 kW 0.5 HP
VFD-DD	230 V/1-phase	







### **Integrated Elevator Drive**

### **IED**

## **Integrated Drive and Control to Save Installation Space**

### **Control**

- Highly efficient group control function, capable of controlling multiple elevators without additional control cards
- Various operation modes: demo mode, attendant service mode and time-based mode
- Single/Double-door elevator applications
- Max. 48 floors

### Design

- · Compact design, suitable for limited installation spaces
- · Modular design of fans and capacitors for easy replacement and maintenance
- · A small-size LED keypad allows users to check and set the drive control

### **Drive**

- · Support induction and permanent magnet motors
- Emergency Power Supply (EPS) function
- · Dual safety protection functions: torque output check before releasing mechanical brake

### Tune

- · Auto-learning hoistway and auto floor height detection
- Auto-tuning motor parameters without load disconnection
- · PC software monitors motor operation status

### **Energy Saving**

- Power regeneration function available when installed with Delta's Active Front End (AFE2000 Series) or Power Regenerative Unit (REG2000 Series)
- · Lighting and air circulation scheduling for elevator cars
- Standby mode to save energy

### **Efficiency**


- Direct stop: multi-speed control to provide a comfortable ride with higher efficiency
- · Peak hour operation: improves peak hour operation efficiency
- Full-load bypass operation: arrives at designated floor without stopping

C € EH[

Power Range	2.2 kW 3 HP					18.5 kW 25 HP			
	230 V/1-p	ohase							
IED			230 V / 3-	phase					
			460 V / 3-	phase					






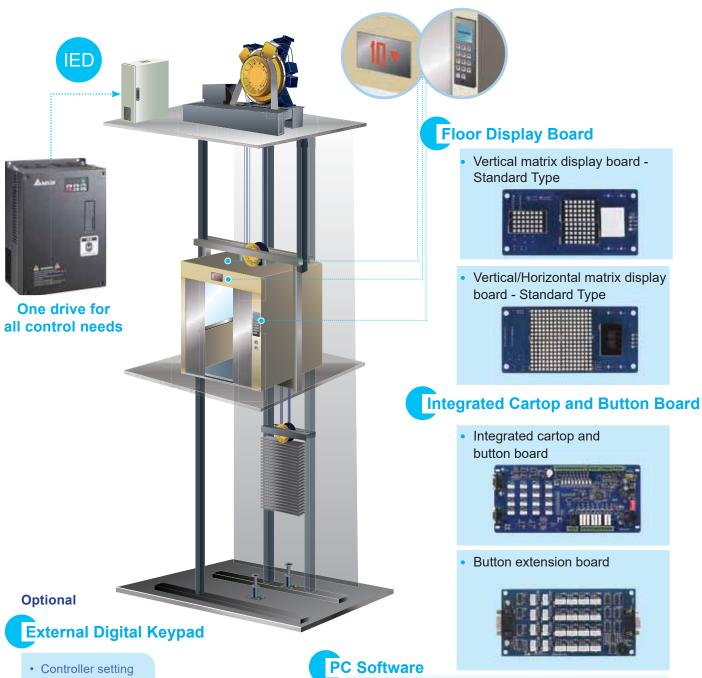

- Drive setting
- Parameter copy



USB port facilitates program upload/download and tuning process





# **Hybrid Energy Saving System**HFS

### **Energy Saving for Injection Molding Machine**

- Superior Energy-Saving Outcomes: 40% less energy consumption than variable pump hydraulic systems; 60% less energy consumption than traditional quantitative pump hydraulic systems
- Low Oil Temperature: oil temperature decreased by 5°C to 10°C, saving costs on oil cooler
- Reduce Oil Usage: 50% to 60% oil usage savings and a 50% smaller oil tank
- High Duplication Accuracy: Precise flow and pressure control featuring duplication of products with less than 0.09% difference
- · Long Holding Pressure: Keep mold halves securely closed for a longer period for thick plastic products formation
- Fast Frequency Response: High speed frequency response up to 50 ms with permanent magnet servo motor (PMSM)
- Suitable for Harsh Environments: Resolver is resistant to earthquakes, oil and dust
- Easy to Refurbish Old Machines: Analog command 0~10 V and linear correction (3 points), no need to replace the computer
- Flow Convergence: Saves cost on tubes; enlarged flow capacity enhances energy-saving performance

# Traditional injection molding machine with fixed displacement pump Hybrid Energy Saving System (HES) Prover Consumption Curve of the Injection Molding Process Fittome | Downson | Down

Power Range	50 L/min	63 L/min	80 L/min	100 L/min	125 L/min	160 L/min	200 L/min	250 L/min	320 L/min
	230 V/3-phas	е							
HES	460 V / 3-phas	е							

### **Applications**

Injection molding machines, bottle blowing machines, pipe bending machines, bending machines and other hydraulic equipment





### **Power Regenerative Unit**

### **REG2000**

### Replaces Traditional Brake Resistor and **Features Power Regeneration**

- · Compact design with reactor included, easy to install
- · Outstanding energy-saving performance with more than 95% power regeneration efficiency
- Replace traditional brake resistors to reduce the generation of heat
- · Compatible with the drives and servo drives that have DC terminals
- Support parallel connections for large power applications
- Improve motor braking capability from 125% to 150%
- Built-in RS-485 (Modbus) communication and real-time monitoring of energy-saving performance and cost
- Optional communication cards: (1) Modbus TCP, EtherNet/IP, CANopen, PROFIBUS DP and DeviceNet
  - \* Please contact Delta Industrial Automation

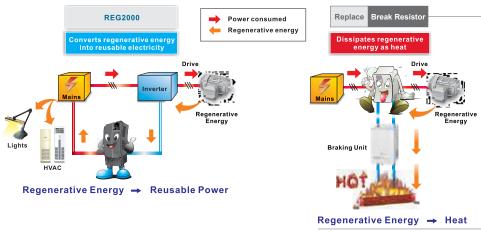





Power Range	7.5 kW	11 kW	15 kW	18.5 kW	22 kW	30 kW	37 kW	45 kW	55 kW
DECOMO	230 V/3-phase	е							
REG2000	460 V/3-phase	е							

### **Applications**

Large-inertia load applications: centrifuge equipment, industrial laundries, roving machines and more

4-quadrant load applications: elevators, cranes, pumpjacks and more

Quick braking applications: machine tools, bag making machines, auto storage and retrieval systems, presses and more

Long-term energy feedback applications: printing machines, escalators and more







**Control** 









Industrial Laundry



### **Active Front End**

### AFF2000

### The Best Energy Saving Device with AC Motor Drives

- More than 95% power regeneration efficiency
- Improve power factor to more than 99% with input current THD ≤5%
- Realize 4-quadrant operation with variable frequencies and speed control when applied with AC motor drives
- Maintain constant DC BUS voltage and current when the voltage provided by the mains is unstable
- Support all kinds of fieldbus for real-time power status monitoring and control\*



CANopen DeviceNet MODBUS TCP EtherNet/IP





Power Range	7.5 kW 10 HP	15 kW 20 HP	22 kW 30 HP	37 kW 50 HP	45 kW 60 HP	75 kW 100 HP
AFE2000	230 V 3-phase					
AFE2000	460 V 3-phase					

### **Applications**

Large-inertia loads applications: centrifuge equipment, dewatering machines and roving machines

4-quadrant loads applications: elevators, cranes and pumpjacks (oil extraction machines)

Quick braking applications: machine tools, bag making machines, auto storage and retrieval systems, and lathes Long energy feedback time applications: wind power, water power, steel printing and paper making machinery (winding equipment)

Power quality improvement: semiconductor and panel industries

### Static Var Generator

SVG2000

### **Comprehensive Reactive Power Compensation to Improve Power Efficiency**

- Compensate both leading and lagging reactive current; improve power factor to 0.99
- Adopt special Delta power supply modules to provide a wide range application from 220 V ~ 480 V and 525 V~690 V
- · Modular design of fan, power, drive, control and reactor modules
- 7" touch screen TFT LCE expression in 65,536 colors

Capacity	300 k VAR	500 k VAR
SVG2000	220V~480V/	3-phase
3VG2000	525V~690V/	3-phase

### **Applications**

A new solution to replace traditional phase-leading capacitors, applicable to the power distribution systems of industry, infrastructure, commercial buildings and homes





### **Active Power Filter**

### APF2000

### For Power Quality Improvement

- Filter the 2<sup>nd</sup> to 50<sup>th</sup> order harmonics with efficiency of more than 90%, compliant with IEEE519 standard
- Full response speed faster than 20 ms
- Selection to compensate either harmonic wave or reactive power, or both at the same time
- · Modular design of fan, power, drive control and reactor modules
- 7" touch screen TFT LCD expression in 65,536 colors
- Compact design: the 300A model only measured 600W x 800D x 2200H (mm)
- · Parallel connection of multiple units to expand total capacity
- Built-in RS-485 communication and provides various communication and fieldbus card options



CANopen (DS301)

### Concept

An active power filter is a large power electrical device that monitors the three-phase current in real time and provides an equally opposite phase to relevant devices to filter out the harmonics. It is parallel connected to the grid and uses a current transformer to inspect the 3-phase current waveform and obtain the required compensation data of harmonic current and reactive power. The active power filter will then inject an equally opposite current input to the power system for harmonic filtering results. In addition, the active power filter can also create phase that complements the leading and lagging reactive current. It effectively improves the power factor of the grid and provides compensation to the reactive power.

Capacity	50 A	100 A	200 A	300 A
APF2000	200 V ~ 480 V/	3-phase		

# Grid current Compensating current

### **Applications**

### Metallurgy and petrochemicals industries:

Rectifier, converter, rolling mill, electric arc furnace, medium frequency furnace and inverter

### **Chemical and electrolysis industries:**

Rectifier, calcium carbide furnace, electric soldering and inverter

### **Mechanical industries:**

Rectifier, rolling mill, inverter, electric arc equipment

### Metal, paper, plastic processing and textile industries:

Rectifier, rolling mill, inverter, electric arc furnace and electric furnace

### **Transportation industries:**

The rectifier and the inverter of electric vehicles, electric motorcycles and metro systems

### Automobile manufacturing industries:

Soldering equipment, car painting equipment, battery charger and inverter

### Telecommunication, medical and construction industries:

Server station, EPS, UPE, converter, charger and inverter







### AC Servo Drive & Motor W

ASDA-A3


24-bit Absolute Type Encoder 3.1 kHz Bandwidth

### **Advanced Motion Control Functions Inside**




### 3.1 kHz Bandwidth

- Response bandwidth increased by 3.1 times (compared to the ASDA-A2 Series), providing higher speed for commands
- · Higher responsiveness and shorter settling time increases productivity

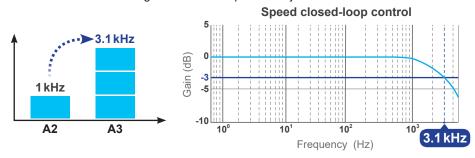


### 24-bit Absolute Type Encoder

- Positioning precision enhanced by the 16,777,216 pulses/turn encoder
- Reduced speed variance at low speed to ensure smooth process and enhance machine efficiency
- Absolute type encoder helps to keep the motor's position when the power is off

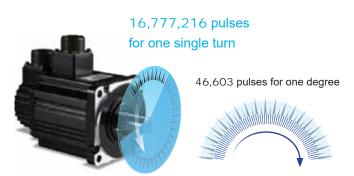

### **Advanced Motion Control Functions**


- 99 sophisticated motion commands and segments allowed
- Graphical user interface offers simple setup and programming
- Arithmetic operation and condition jump commands are added
- General motion functions: homing, position, speed, superimposition, blending, on-the-fly change motion commands and E-CAM functions are available





### **Low Frequency Vibration Suppression Function**

· Keep the machining process stable when mechanisms with higher elasticity such as a belt or a swing arm are applied






### **Auto-Tuning Function**

 Optimize machine performance with less tuning effort and simple setup procedures via panel keypad or software



### **Smart and Intuitive Software Interface**

- Tree-view index window with organized list and collapsible menu helps to access functions easily
- · Intuitive user interface provides set up functions and parameters with efficiency and accuracy

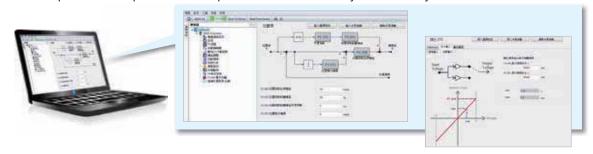

### **Compact Size Design**

 ASDA-A3 is 20% smaller than the ASDA-A2 in dimensions, requiring less installation space



### **Applications**

Machine tools, electronic assembly or detection equipment, industrial robots, packaging machines, labeling machines, semiconductor processing equipment and textile equipment

### **AC Servo Drive & Motor**

### ASDA-A2

Implements 20-bit (1,280,000 p/rev) superior resolution encoder as a standard



### **Built-in Motion Control Functions**


- Electronic Cam (E-CAM) function for mark tracing, positioning, synchronous control applications; max. 720 points for E-CAM ooutline
- High-speed Capture and Compare function for position latch and detection; max. 800 records stored in the memory
- · Built-in gantry control algorithm


### **High Precision, High Performance Servo Motors**

- · Support incremental type and absolute type encoders
- Incremental type encoder provides up to 1,280,000 p/rev resolution for high-precision positioning

### **Full-Closed Loop Control (Accuracy of Positioning Guaranteed)**

- Direct signal transmission through CN5 port to perform full-closed function
- Reduce the effect of backlash and flexibility from the machine and ensure the accuracy of positioning










### Versatile PR mode

- 64 procedures can be applied for various and multiple points continuous motion movements
- 35 homing modes/jump mode/parameter editing mode/speed mode/position mode







### **Basic Features**

- Input voltage: 200 V<sub>AC</sub> ~ 230 V<sub>AC</sub>, 0.1 kW ~ 15 kW, 1-phase/3-phase, or 3-phase
- Input voltage: 400 V<sub>AC</sub>, 0.4 kW~15 kW, 3-phase
- Up to 1 kHz bandwidth for high speed and high precision applications
- CANopen, DMCNET, EtherCAT communication protocols
- ASDA-A2-E model is equipped with Safe Torque Off function (STO), compliant with IEC31800-5-2

	Туре	RS-485 (CN3)	Full Closed- loop Control (CN5) <sup>-1</sup>	Port for	PR Parameters <sup>*2</sup>	E-CAM*3	EtherCAT*4	CANpen	DMCNET	Analog Voltage Control	Pulse Input Port
Standard Model	L	0	0	X	0	X	X	X	X	0	0
	U	0	0	0	0	0	X	X	X	0	0
Network Model	Е	Х	X	0	0	X	0	X	X	Χ	Х
	F	0	0	X	0	Χ	X	X	0	Χ	Х
	M	0	0	X	0	0	X	0	X	0	0


<sup>\*1.</sup> In PR mode, only ASDA-A2-F supports full-closed control function.

### **Applications**

Food packaging machines, filling and bottling equipment, labeling machines, feeding machines, TFT LCD cutting machines, IC packaging machines, injection processing equipment, lathes, electric discharge machines (EDM), woodworking machines, wire cutting machines, printing machines, textile equipment



Food Packaging Machine



Wire Cutting Machine



Feeding Machine



High-speed Labeling Machine

<sup>\*2.</sup> PR parameters can be read and written through communication by DMCNET only

<sup>\*3.</sup> E-CAM function can only be used in PR mode

<sup>\*4.</sup> For information about ASDA-A2-E EtherCAT interface servo drive, please refer to the ASDA A2-E brochure.

### AC Servo Drive Ethercat

### ASDA-A2-E

### **Supports EtherCAT High-speed Communication**

Delta's ASDA-A2-E Series, advanced AC servo drives with EtherCAT communication interface, complies with IEC61158 and IEC61800-7 to enable faster, real-time, and accurate performance in high-end applications. The series also support a CoE device profile based on CiA402, and all command types of EtherCAT.




In addition to the EtherCAT communication function, the ASDA-A2-E Series feature:

- Wide power range: 400 V 400 W~7.5kW, 220 V 100 W~3kW
- Integrated Safe Torque Off (STO), compliant with IEC61508, SIL2; IEC62061, SILCL2; ISO13849-1, Cat. 3 PL=d
- Short cycle time, ideal for high-speed synchronous multi-axis control
- Touch probe function can be enabled with two dedicated Digital Inputs (DI) on CN7 or an external encoder
- Support absolute type and incremental type ECMA Series motors

# EtherCAT controllers Delta PC-Based Motion Controller Delta PC-Based Motion Controller Delta PC-Based Motion Controller

### **Applications**



**Metal Working Machine** 



**Woodworking Machine** 



Food Processing




**Printing Machine** 



### **Communication Specifications**

Physical Layer	IEEE802.3u (100 BASE-TX)					
EtherCAT Commands (Data Link Layer)	APRD, FPRD, BRD, LRD, APWR, FPWR, BWR, LWR, ARMW, FRMW, APRW, FPRW, BRW, LRW					
Device Profile (CiA402)	Homing Mode, Profile Position Mode, Profile Velocity Mode, Profile Torque Mode, Interpolated Position Mode, Cyclic Syn. Position Mode, Cyclic Syn. Velocity Mode, Cyclic Syn. Torque Mode, Touch Probe Function, Torque Limit Function					
Process Data Size	Tx: 8 Object (max. 32 bytes) Rx: 8 Object (max. 32 bytes), supports Dynamic Mapping					
Bus Clock	DC cycle with min. 250 us					
LED Indicator	EtherCAT Link/Activity Indicator (L/A)x2 EtherCAT RUN Indicator (RUN)x1 EtherCAT ERROR Indicator (ERR)x1					

### **Part Names and Functions**



### **Accessories for ASDA A2-E**





# **AC Servo Drive & Motor**

# ASDA-B2

Implements 17-bit (160,000 p/rev) high resolution encoder as a standard




## Power Range: 0.1 kW~3 kW

- Input voltage: 200 V<sub>AC</sub>~230 V<sub>AC</sub>, 1-phase/3-phase, or 3-phase
- · Meets high precision positioning control requirements of general-purpose machine tools:
  - Built-in Position, Speed and Torque modes (Speed and Torque modes can be controlled via internal parameters or external voltage)
  - Provides pulse input (up to 4 Mpps) and analog voltage commands
  - Three notch filters are provided to optimize the operation of the mechanical system automatically
  - Friction compensation and motor protection functions are available to reinforce the system
  - Separated power supply for main circuit and control circuit, easy to maintain
  - Built-in regenerative resistor featured as standard (400 W and above models), saving wiring and cost



# **Applications**



**Bar Feeder** 



Transporting and **Conveying Equipment** 



**Electric Discharge** Machines (EDM)











**Cutting Machine** 




## **High Accuracy for Positioning**

 ASDA-B2 Series feature an incremental encoder with 17-bit resolution (160,000 p/rev) which can eliminate unstable commands at low speed, smooth the motor operation and enhance the accuracy of positioning





Three auto notch filters to suppress mechanical resonance efficiently

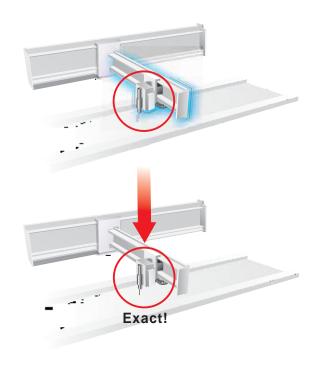


## **Easy-to-Use and Cost-Saving**

- Same power and encoder cables as the ASDA-B Series
- User-friendly digital keypad, ideal for parameter settings and monitoring



 Built-in regenerative resistor (400 W and above models), simplifying wiring and minimizing space



# **AC Servo Drive & Motor**

## ASDA-M

Three-in-one Intelligent Servo System Harmonizing Motion Controller and Servo Drive

#### **Impeccable Motion Control**

- · 3-axis synchronous servo module with higher performance
- Built-in motion control and PLC functions
- Multi-axis synchronous interpolation and built-in motion control commands, ideal for applications that require high synchronous control accuracy
- Versatile PR mode for various continuous motion movements

#### **New PC Software Functions**

- · ASDA-Soft provides built-in contour analysis function
- EzASD provides PLC programming and motion commands editing environment


# **High Precision, High Performance Servo Motors**

- Support incremental type and absolute type encoders
- Incremental type encoder provides up to 1,280,000 p/rev resolution for high-precision positioning



### **Product Line-up**



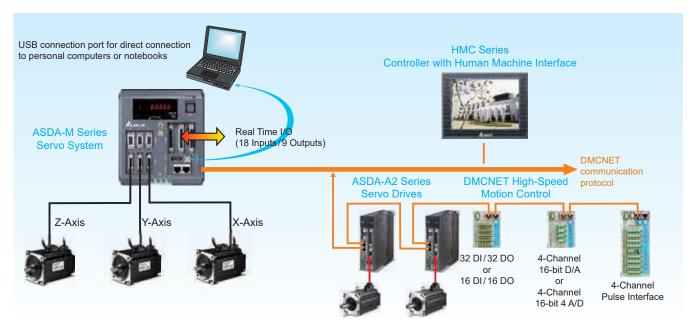




## Real Time, Reliable and High-Speed Motion Control Network

- Support DMCNET and CANopen communication protocols
- Builds an integrated system configuration by DMCNET with the aid of Delta's Controller with Human Machine Interface (HMC)
- Support DMCNET extension digital input and output modules

### **Advanced Gantry Control**

- Real-time data exchange among 3 axes greatly increases the efficiency and performance of gantry control
- Simultaneously performs precise motion control and drive for each axis in rigid or general mechanical systems whether the loading on multiple axes is equal or not

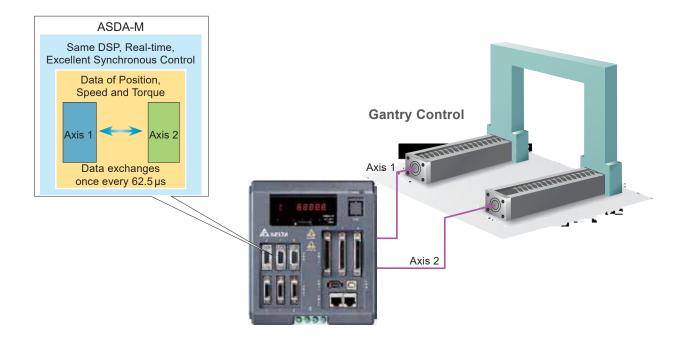

# **Spindle Motor Drive**

# ASDA-S

# **Ensuring Premium Surface Finish Quality for the CNC Industry**

### Power range: 3kW~15kW

- Support Delta permanent magnet spindle motors and other induction motors
- Provide high performance servo vector control as in the ASDA-A2 Series
- Support pulse encoder signals (ABZ phase) via CN5 port, no external converter card required
- · Built-in induction motor parameter measuring and estimating function
- · Offers V/F control for induction motors without encoders
- Equipped with analog speed and resolution switching function
- Accept analog voltage, position pulse and DMCNET communication commands
- 200 V models and 400 V models are available for selection
- · Capable of connecting to CNC controllers via DMCNET high-speed serial communiction





# **IPM Spindle Motor**

# **ECMS**

## Power range: 3.7 kW/6.7 kW

• Encoder Type: Incremental 20-bit

Max. torque: 14.72 N-m / 26.65 N-m

• Speed range: 6000 r/min ~ 12000 r/min

Options: Coolant through spindle

• IP degree: IP54





# **Linear Motion Drive**

## ASDA-A2R

# **Delivering a Superior Linear Motor**


The new ASDA-A2R Series linear drive system provides high accuracy, high rigidity and high response. It not only expands the applications of the servo system, but also increases the work efficiency of the motion contol system and satisfies high-precision requirements.

The ASDA-A2R follows in the footsteps of Delta's successful servo system and provides the same functions such as high-speed and high response performance, excellent vibration and resonance suppression, versatile PR mode, DMCNET and CANopen communication interfaces, built-in E-Cam and gantry control functions.



### Power range: 100W~3kW

- Intelligent motor parameter measuring, easy and fast auto tuning
- · Accurate positioning and initiation without a Hall sensor unit
- High flexibility in connecting various kinds of linear motors and servo motors
- Optional signal converter box (Delta) available for high speed and high precision requirements
  - Support AB phase square waves of digital signals
  - Sine waves of analog signals
  - Signals can be divided up into a multiple of 2,048 to increase positioning resolution for precise position control
- · Detection and compensation of cogging force



# **Ironless Linear Motor**

## **ECML**

#### Power range: 100W~750W

- Rated thrust: 21~1380 N
- Direct driving mechanism, high speed and high precision control
- No cogging forces and low thrust ripple



# **Linear Shaft Motor**

# **ECML-S**


# High-speed, High-precision Linear Motor Position Repeatability within ±1um

- · Simple mechanism structure for quick installation
- Direct driving mechanism, easy to replace ballscrew mechanism
- · No cogging forces, low thrust ripple
- Excellent dynamic response
- No backlash
- Built-in temperature sensor and hall sensor units
- · Large air gap for easy installation
- Installation holes on both sides in the coil assembly for easy mounting



## **Thrust Range**

Thrust (N)

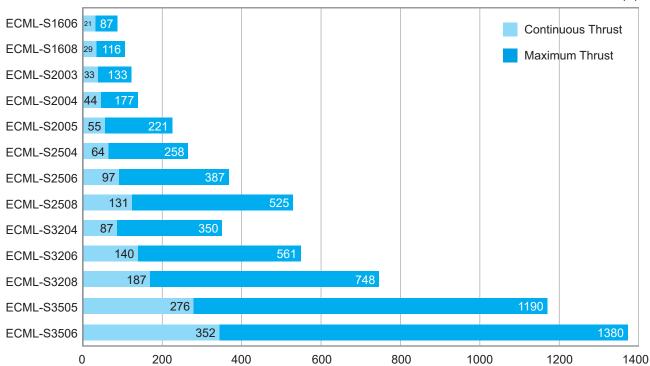

# Length of Magnetic Way (Unit: mm)

— eriger er ereigerete raif (oma min)				
Shaft Diameter	Minimum Length	Maximum Length	Increments	
ECML - SM16	250	1,240	30	
ECML - SM20	250	1,270	60	
ECML - SM25	330	1,650	60	
ECML - SM32	450	2,790	60	
ECML - SM35	810	2,790	60	



# **Linear Stage**

# LU

# High Precision Steel Ballscrew Driven Stage Position Repeatability of ±3um

- Non-coupling mechanism design
- · Compact size for space saving
- High rigidity and high accuracy
- Fast response
- · Low inertia ratio




## **Characteristic Analysis**

**Delta LU Series** (without coupling)




**Conventional Linear Stage** (with coupling)

# Measured Data by Laser Interferometer

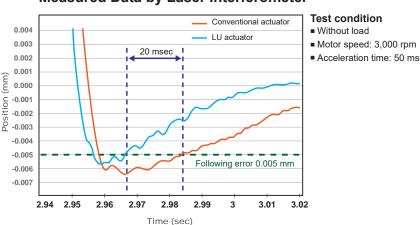

### **Thrust Range**

LU-46 (400W / Lead 10) LU-46 (400W / Lead 20) LU-33 (100W / Lead 5) LU-33 (100W / Lead 10) LU-26 (100W / Lead 2) LU-26 (100W / Lead 6)

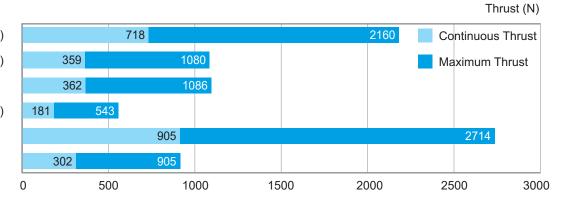

# Linear Stage

# LA-S

# High Speed, High Precision Linear Motor Driven Stage Position Repeatability of ±1um

#### · Direct drive with zero backlash

Directly driven by Delta's linear motor without backlash and alignment issues

#### High speed and high precision

- Provide high-precision and high-stability motion operation: high speed capability of up to 4m/s
- Integrate with linear motor and optical linear encoder for direct drive and preventing backlash and accumulated offsets caused by changing machines


#### · Cog-free design with low thrust ripple

Use an ironless forcer for zero cogging and low thrust ripple to perform smooth motion, even at low speed

#### Long travel distance with multiple sliders

- Good performance on long travel distances (up to 1.5 m) for various positioning applications
- Single-axis platform supports more than 2 linear motors, creating multiple sliders within one stage unit for efficient space savings and independent operation

## **Mechanism Design**

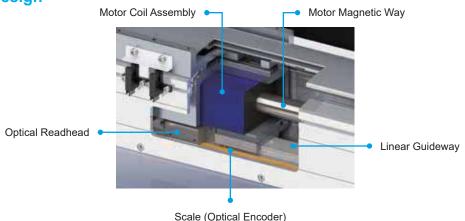

## **Thrust Range**

Thrust (N) LA-S4 44 Continuous Thrust Maximum Thrust LA-S5 55 221 LA-S6 64 LA-S7 96 386 LA-S8 131 LA-SA 138 LA-SB 185 740 0 100 200 300 400 500 600 700 800



# **High Precision Planetary Gearbox**

PS



- Support all series of Delta servo motors
- Provide concentric and right-angle models
- High precision
  - Backlash for concentric 1-stage gearbox is under 3 arcmin
  - Backlash for right angle 1-stage gearbox is under 4 arcmin
- High input speed

Input speed allows for 5,000 RPM

High torque

Helical gear design offers higher output torque in comparison with spur gearbox

- High efficiency
  - Efficiency for 1-stage model exceeds 97%
  - Efficiency for 2-stage model exceeds 94%
- Low noise

Under 65dB

Lifetime lubrication

Protective class IP65 sealed design avoids leakage problems and requires no maintenance during the product's lifetime

# **Precision Planetary Gearbox**

PA



- Support all series of Delta servo motors
- Provide concentric models
- · High rigidity and high torque
  - Employ uncaged needle roller bearings with a set design
  - including ring teeth, gearbox and helical gears for high rigidity and output torque
- High precision
  - Backlash for 1-stage gearbox is under 8 arcmin
  - Backlash for 2-stage gearbox is under 12 arcmin

- High efficiency
  - Efficiency for 1-stage model exceeds 95%
  - Efficiency for 2-stage model exceeds 92%
- Low noise
  - Use helical gears capable of meshing to ensure smooth and quiet operation
- Lifetime lubrication
  - Protective class IP65 sealed design avoids leakage problems and requires no maintenance during the product's lifetime

# PC-Based Motion Controller (PAC)

MH1/MH2 New / MP1

# Support DMCNET/EtherCAT fieldbus for various motion control applications

#### Energy Efficiency and Robust Hardware

- The MH1/MH2 Series: cable less, fan-less and low-power consumption design supports stable operation; built-in CFast card, SD card and SSD slots provide fast and stable data transmission
- The MP1 Series: equipped with a 10.1-inch touchscreen for more flexible operation



#### • Multiple Peripheral Interfaces for Communication

Equipped with USB ports, serial COM ports, Gbps Ehternet ports and PCI/PCIe extension slots

#### • Support Master and Slave Modules

Built-in DMCNET and EtherCAT protocols, able to connect and control DMCNET modules and servo axes (max.12 units / 12 axes), and EtherCAT modules and servo axes (max.100 units / 64 axes); DMCNET / EtherCAT extension cards are also available to extend axes and units


#### High Security

Customizable IC device for programming security and confidential protection

#### OS and Software Support

The MH1/MH2 Series support real-tme OS (RTE, VxWorks) and general Windows 7/10\*. Users can choose to program with the built-in Dynamic-link library (DLL), and development tools SoftHMI and SoftPLC

\*Please contact customer service if changing to this environment

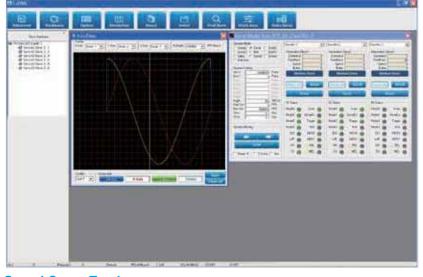

#### **Motion Control Functions**

- · Point-to-point position control
- · Multi-axis linear interpolation
- · Single-axis two-speed motion
- · Circular interpolation
- Helical interpolation
- · Backlash compensation
- Helix deviation compensation
- Compare
- Table motion
- JOG
- PT/PVT
- Gantry control (EtherCAT)
- E-CAM (EtherCAT)

#### Speed Curve Tracing

Speed curve tracing function to trace current motion speed and adjust commands

#### Simulation Scope

Captures figures of motion commands or real motion tracks with X/Y-axis monitor to simulate motion commands or monitor motion tracks

#### DMCNET/EtherCAT Automation Software

The EzDMC/EcNavi development software includes a DMCNET/EtherCAT master controller and slave devices for data communication, functional identification, programming and debugging, providing a fast and easy way for first-timers to understand the solution

#### Motion Control Platform Based on CODESYS New

The PC-Based Motion Controller AX864E Series based on CODESYS Series saves development time and cost (available in 2019 Q3)



#### **Applications**

**Electronics Production: PCB machines, Automated Optical Inspection (AOI) machines, semi-conductor** 

machines, LED machines, TFT inspection machines, glue-dispensing machines, SMT pick-and-place machines, winding machines, optical lens processing machines,

glass grinding machines

Woodworking: CNC drilling machines, woodwork cutting machines, board slitting machines, mortise & tenon machine, solid wood door machine

#### Other: Pipe-bending machine



#### Centralized Slave Modules

• Gateway Type E-BUS Remote Power Couplers

R1-EC5500D0 / R1-EC5512D0

Connect to digital I/O, analog I/O and pulse I/O extension modules



With E-BUS power module

#### 16 Digital Input Remote Modules

R1-EC6002D0 / R1-EC6022D0

Provides digital IN signals remote control for EtherCAT master

# • 1-Channel Pulse Remote Module R1-EC5621D0

Connects to digital I/O, analog I/O, pulse I/O and MPG signal extension modules with EtherCAT master



#### 4-Channel Analog Input Remote Module

R1-EC8124D0

Provides analog IN signals remote control for EtherCAT master

#### • 16 Digital Output Remote Modules

R1-EC7062D0 / R1-EC70A2D0 / R1-EC70E2D0 / R1-EC70F2D0

Provides digital OUT signals remote control for EtherCAT master



#### MPG Module

#### R1-EC5614D0

Receives Manual Pulse Generator (MPG) signals remotely for EtherCAT master

#### 4-Channel Analog Output Remote Module

#### R1-EC9144D0

Provides analog OUT signals remote control for EtherCAT master



# **Delta High-Speed Motion Control System**

**DMCNET** 

Delta's Motion Control NETwork (DMCNET) is a high speed, real-time communication system.


- Up to 12 axes servo control with-in 1ms simultaneously; with 3-axis helical and linear interpolation divided into 4 groups, or 2-axis linear and arc interpolation divided into 6 groups
- Support 64-bit dual-precision floating point, allowing high-precision system calculations and flexible operation
- Support absolute commands, incremental commands and T-curve/S-curve velocity profiles
- · Built-in 35 homing modes
- Built-in position, speed and torque control modes; able to receive real-time servo information/parameters or change control modes via communication command, offering fast communication and motion control for various applications

The DMCNET is equipped with the high-speed and reliable one-wire DMCNET communication protocol for diverse motion control applications. Adapted for customer's needs, Delta's PCI motion control cards are available in three series:

- 12-axis PCI-DMC-A02
- 6-axis PCI-DMC-F02 with digital I/O interfaces
- PCI-DMC-B01/PCI-DMC-B02/PIC-DMC-B03 with pulse compare & capture functions

All series are able to connect to multiple servo systems, such as the advanced ASDA-A3-F Series, high performance ASDA-A2-F Series, and standard ASDA-B2-F Series, as well as ASDA-A2R Series with linear motors. The DMCNET establishes a total motion control solution enabling lower system cost and superior performance to increase end-product value and competitiveness.

## **DMCNET System Configuration**

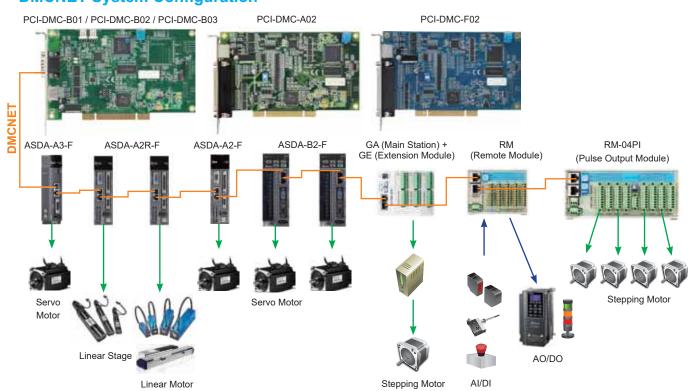

#### **Applications**

Integrated electronics applications, glue dispensing machines, woodworking machines, pipe bending machines




#### **IPC Motion Platform (IMP1.5)**

## A Simple and Fast Setup Development Platform for Realizing Unsurpassed Motion Control

High-speed, flexible and scalable development platform which combines powerful motion control functions and integrates Delta's HMI editing and PLC logic programming software tools to achieve complex and precise motion control based on customers' requirements

- Power Motion Control Core: Upgrades Delta's PAC or PC with a motion control card to become a high-speed communication motion controller with HMI and PLC functions
- Simple Secondary Development Platform: Combines with Delta's standard HMI editor DOPSoft and PLC editor WPLSoft in one platform to simplify programming and IMP project development
- Scalable Communication for Expandable Network: Through PCI extension slots, three DMCNET communication networks
  with up to 36 stations can be established; it is able to control 36 axes of servo motors simultaneously without connecting
  to any remote modules
- Industry-Oriented Controller: Provides Soft Numeric Control (SNC) and Motion Program Macro (MPM) to adjust and modify self-defined motion paths and commands according to application requirement changes
- Standard Communication Interfaces: Built-in Modbus and Modbus TCP gateways enable convenient data transmission between machines

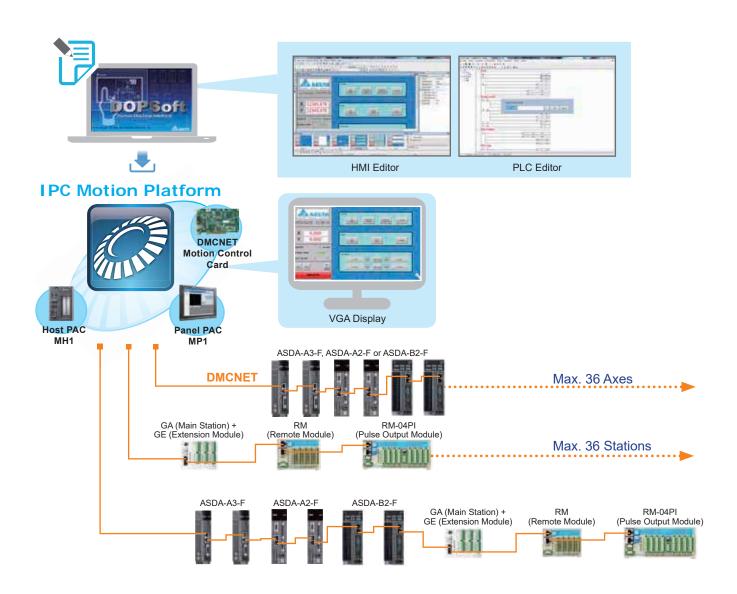

# **EtherCAT High-Speed Motion Control System**


EtherCAT Motion Control Products (Ethernet Control Automation Technology) is an open Ethernet-based fieldbus system that provides high-efficiency and high-performance synchronization quality for automation control. Delta's EtherCAT motion control cards feature:

 PCI-L221-XXD0 and PCIE-L221-B1D0 motion control cards provide complete functions for EtherCAT masters and support device descriptions in XML format (EtherCAT Slave Information-ESI), allowing quick identification of ESI files and offering the capability of real-time connection via EtherCAT for high level integration



- High-speed motion control of up to 64 slave stations, including 32 servo axes within 1ms cycle time
- Communication cycle time between stations: within 1 ms to 0.5 ms based on customer needs
- Motion control functions: 35 homing modes, point-to-point position control, 2-axis/3-axis interpolation, multi-axis synchronization, continuous motion control, gantry control, speed control, torque control and more

## **EtherCAT System Configuration**

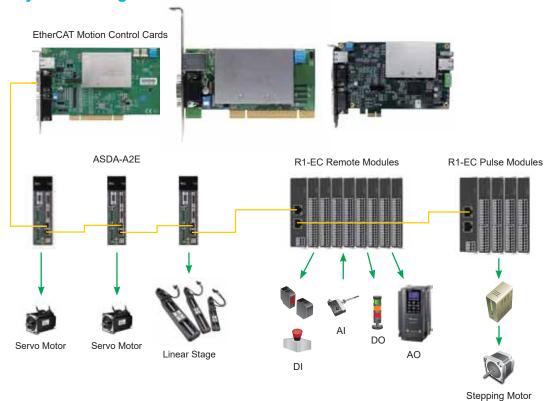

#### **Applications**

Integrated electronics applications, glue dispensing machines, woodworking machines, pipe bending machines




#### **IPC Motion Platform (IMP1.5)**

#### A Simple and Fast Setup Development Platform for Realizing Unsurpassed Motion Control

High-speed, flexible and scalable development platform which combines powerful motion control functions and integrates Delta's HMI editor (DOPSoft) and PLC logic programming tools to achieve complex and precise motion control based on customers' requirements.


- Motion Control Core: Upgrades Delta's PAC or PC with a motion control card to become a high-speed communication
  motion controller with HMI and PLC functions
- Simple Secondary Development Platform: Combines with Delta's standard HMI editor DOPSoft and PLC editor WPLSoft in one platform to simplify programming and IMP project development
- Scalable Communication for Expandable Network: The EtherCAT fieldbus system with IMP is able to connect
  max. 100 stations and control max. 64 axes of servo motors
- Industry-Oriented Controller: Provides Soft Numeric Control (SNC) and Motion Program Macro (MPM) to adjust and modify self-defined motion paths and commands according to application requirement changes
- Standard Communication Interfaces: Built-in Modbus and Modbus TCP gateways enable convenient data transmission between machines

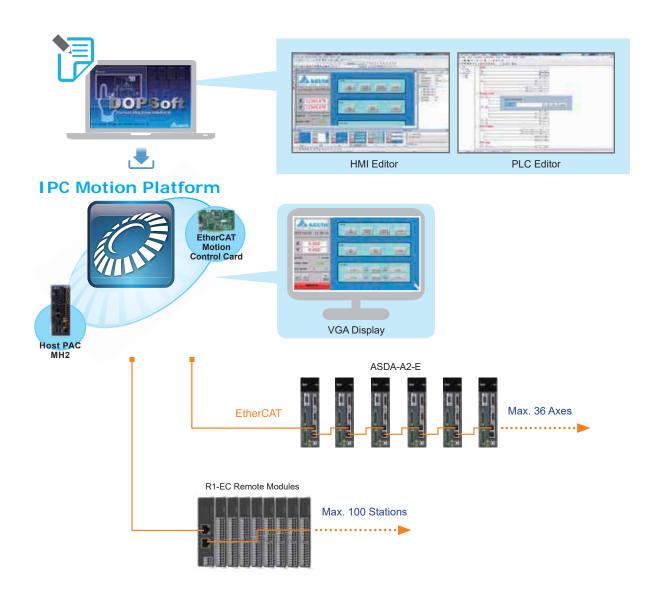

# **CODESYS SoftPLC Platform**

CODESYS is an IEC 61131-3 compliant SoftPLC development system, supporting SoftHMI and PLC programming software to develop. Delta's PC-Based motion controller based on CODESYS offers complete functionalities of a development tool, including:

- Programming based on CODESYS: Equipped in the PC-Based Motion Controller AX864E Series for real-time motion commands via RTE real-time OS and EtherCAT communications
- PLCopen Standard Motion Control: Single and multi-axis motion control with standard PLCopen Motion POUs
- E-CAM: Synchronized E-CAM function and graphic CAM curve editing surface; each cam supports 65,535 points
- Standard IEC 61131-3 Programming Languages: Supports IL, ST, LD, FBD, SFC standard programming languages
- Debugging Mode: Displays application data in simulation mode on SoftPLC, reading/writing/forced setting of variable
  values directly in the respective editor, monitoring specific selected values in watchlists and single step code execution
- Servo Axes Control: Up to 64 axes servo control within 1ms communication cycle

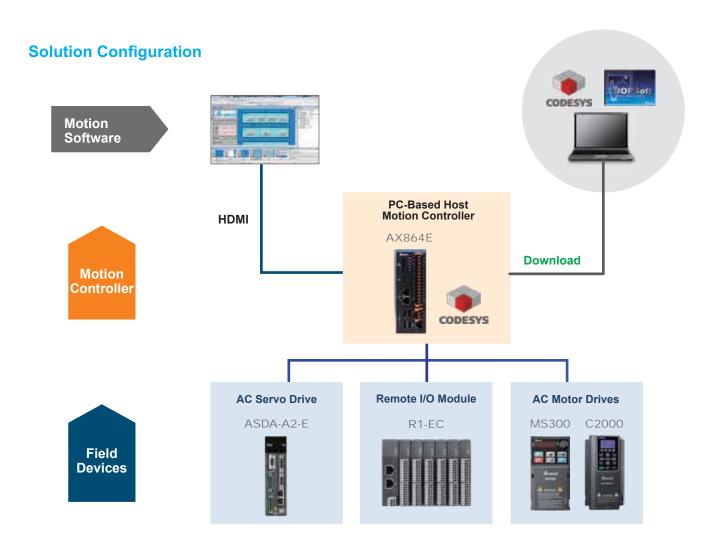



# **Open CNC Solution**

NC E

# Open-structured CNC Control System for Customization and Flexibility



#### Solution 1: Standard


VGA output for external display with Delta's standard interface

- Two-language CNC operation interface (Chinese, English)
- · Embedded control system provides high efficiency
- Allow easy customization with accessories including a monitor and a keyboard
- Support DMCNET communication for easy wiring and excellent synchronous multi-axis control

#### **Solution 2: Function-Oriented**

Match with panels or other products based on applications

- API platform and template are provided for users to self-define the HMI functions
- · Easy integration with third party software via IPC
- Reduce additional hardware cost for customers to focus more on software upgrades and better integration for higher operation performance

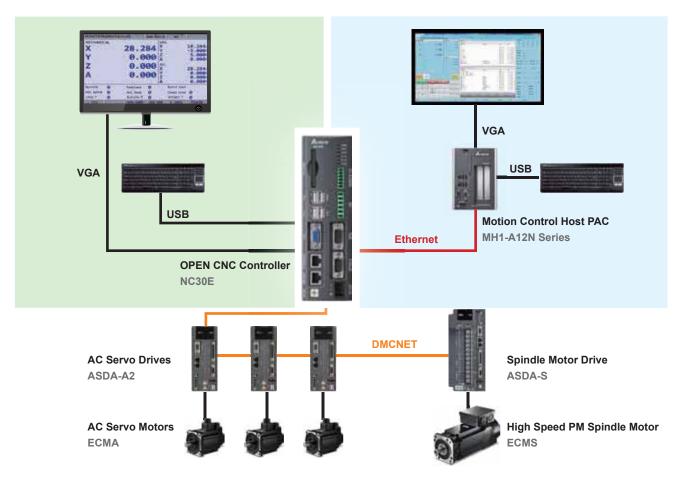

#### **Applications**

Customized CNC systems, woodworking machines, lathes, grinding machings, glass cutting machines, soldering machines, rim engraving, milling machines, industrial robots


# **CNC Solution**

# **Integrated Total Solution for the CNC Machine Tools Industry**



- · Built-in 32-bit high speed and high processing dual CPU to construct a real-time and multi-functional control center
- · High-quality digital data transmission when matched with Delta's high-speed servo and spindle systems
- · Auto-gain tuning allows automatic servo system parameter settings to achieve easy and real-time optimum control
- CNCSoft software offers user-friendly setup and user-defined operation to build customized interface
- · Capable of connecting serial digital I/O modules to greatly improve the extension capacity

## **System Configuration**

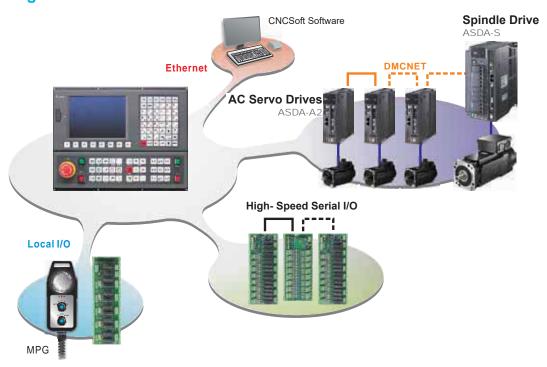

## **Applications**



CNC Machining Center/ High-speed Tapping Machine



**Engraving Machine** 



**CNC Gantry Control Machine** 



**CNC Woodworking Machine** 



# **Robot Controller with Servo Drive Integrated**

## **ASDA-MS**

# **An Innovative and Comprehensive Development Platform for Robot Control**

#### **Complete Robot Solution**

- Integrated servo drive and controller in one single unit for real-time motion control with high flexibility and reliability
- · Various communication protocols
- · Built-in with diverse robot control modules
- Up to 10 axes motion control: 4-axis robot + 6 external axes
- Support 5 kinds of programming languages with IEC 61131-3 standard and the PLCopen motion function block
- Offer DRL Languages for robot application programming
- Support G-code programming


## **User-Friendly Robot Software**

- IEC61131-3 PLC programming
- DRL programming
- Multiple robot motion settings
- Intelligent robot system calibration
- · Real-time monitoring oscilloscope
- Applicable for different types of robots such as SCARA robots, articulated robots, DELTA robots and more



# System Configuration




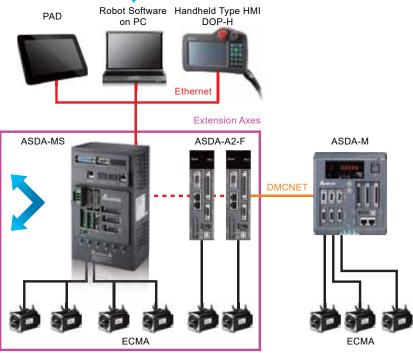




#### **All-in-One Robot Controller**

- Integrates motion controller, robot controller and 4 servo drives into one single unit to speed up data transmission, enhance system control performance and dynamically compensate non-linear terms that affect robot motion during robot moving processes, meeting the requirements of high speed and high precision for robot or motion control applications
- Provides a variety of tools for implementing required functions and supports different types of robots such as the 4-axis SCARA robot, the Linear DELTA, DELTA robot, and the 2 axes extension via DMCNET for 6-axis articulated robot to meet diverse requirements with flexibility and reliability

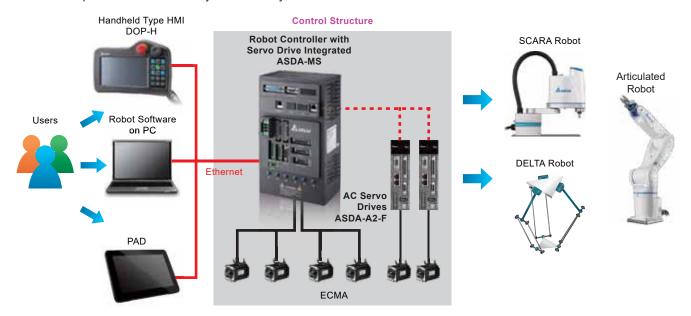

### **Comprehensive Development Platform**

- Provides a comprehensive development platform for customers to design their specific applications, enhancing value-added secondary development and efficiency of various manufacturing techniques
- Integrates with Delta's industrial automation products and related robot peripheral devices to create a complete robotic automation solution, meeting the requirements for both single robot and robot workstation applications

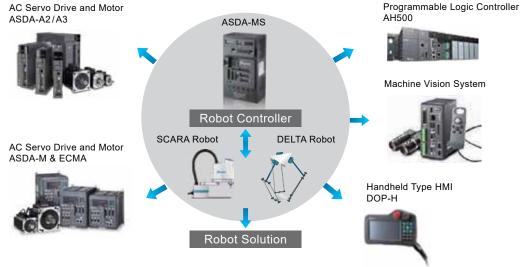

## **Applications**

Industries: Consumer electronics, electrical/electronics, rubber and plastics, packaging, metal fabrication

Processing: Insertion, screw driving, assembly, glue dispensing, soldering, loading/unloading, stacking, inspection



# Controller with Human Machine Interface HMC

**Optimum Combination of Controller and Display** 

# 7-inch Controller with Widescreen Handheld HMI

# HMC07-N411H5C5(A)

- 7" 16:9 widescreen 65,536 colors TFT
- Display Resolution: 800 x 480 pixels
- · Built-in PLC functions
- · Built-in emergency stop switch
- Built-in enable switch (rear side)
- Optional MPG (Manual Pulse Generator)
- · Supports SDHC card
- Supports DMCNET
- · Compact and lightweight 750g design



# 7-inch Controller with Handheld HMI

## HMC08-N500S52

- 7" 65,536 colors TFT
- Display Resolution: 800 x 600 pixels
- · Built-in PLC functions
- RS-422 high-speed remote I/O connection
- Supports Ethernet
- Supports DMCNET

- Supports SDHC card
- · Supports audio output: MP3, Wav files
- USB Host for direct connection to USB disk, printer, mouse and keypad




# 8-inch Controller with HMI

## HMC08-N500S52

- 8" 65,536 colors TFT
- Display Resolution: 800 x 600 pixels
- Built-in PLC functions
- RS-422 high-speed remote I/O connection
- · Supports MPG (Manual Pulse Generator) Input
- Supports Ethernet
- Supports DMCNET
- Supports SDHC card
- · Supports audio output: MP3, Wav files



# **Robotic Loading / Unloading Control for Machine Tools**

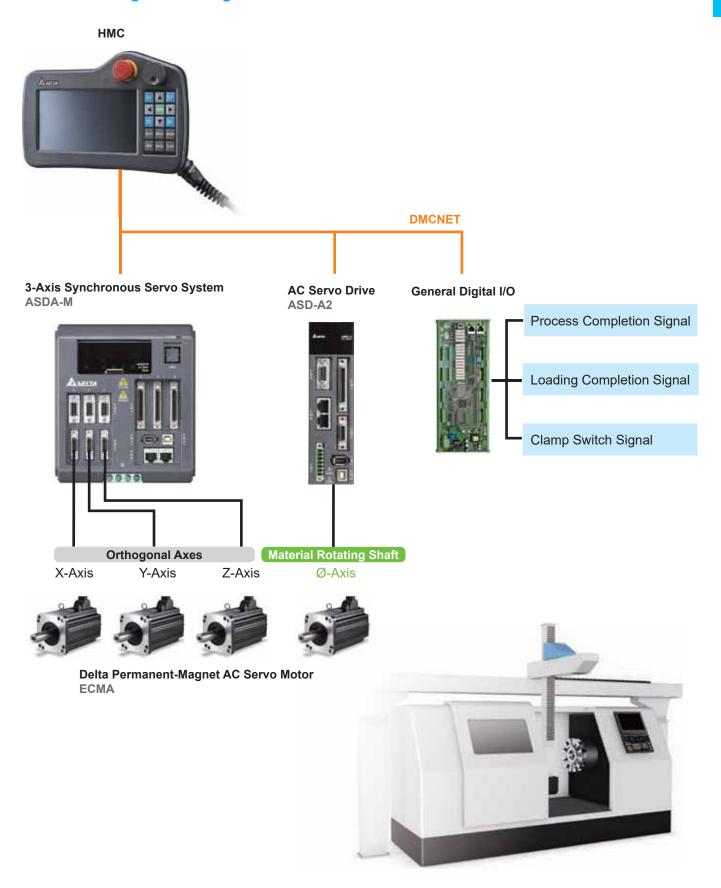



# Hot Swappable Mid-range PLC


## AH

# The Smart Solution for High-end Machinery and System Integration



- 32-bit dual-core multitasking processor
- Excellent program execution speed: LD: 20ns
- Max. I/O:
  - DIO: Max. 4,352 points
  - AIO: Max. 544 channels
  - RIO: Max. 125,440 digital points/3,920 analog channels
- Program capacity: Max. 1M steps (4 MB)
- Data register (D+L): 512k words
- CPU with built-in fully isolated RS-232 / 422 / 485 ports, Mini USB port, Ethernet port and SDHC card slot (compatible with the memory cards on the market)
- Abundant selection of AIO modules, DIO modules, temperature modules, network modules, pulse-train and DMCNET motion control modules

# **Modularized Hardware Structure and Highly Integrated Software**

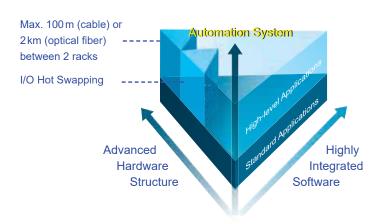


- Highly integrated programming software ISPSoft: Graphical interface with 5 programming languages
- Enhanced flexibility: Max. 100 m (cable) or 2 km (optical fiber) between 2 local extension racks
- Redundant system and hot-swapping function ensure non-stop system operation for improved maintainability

#### **System Extension Structure** Remote I/O Bus Supports - DeviceNet PROFIBUS EtherNet/IP **Extension bus** Extension bus (Optical Fiber) Local extension bus: Local extension bus: Max. extension: 7 racks Max. extension: 7 racks • Max. distance: Max. distance: - Between 2 racks: 100 m (cable) or 2 km (optical fiber) - Between 2 racks: 100m (cable) or 2 km (optical fiber) - Total: 700 m (cable) or 14 km (optical fiber) - Total: 700m (cable) or 14 km (optical fiber)

#### **Motion Control Structure**

Example: AH20EMC

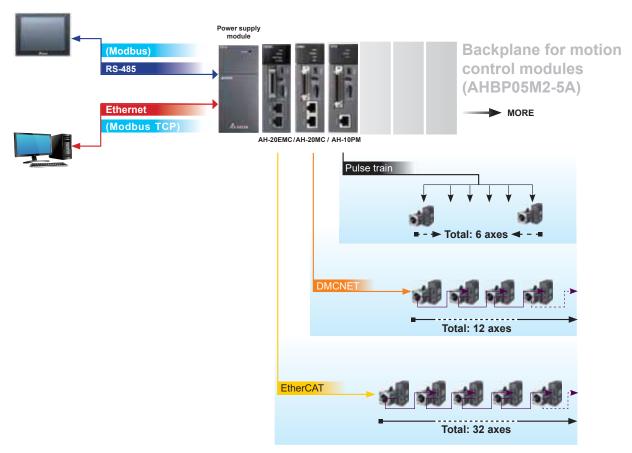

#### **Applications**

High-end industrial equipment: textile machines, packaging machines, injection and molding machines, electronics equipment, printing machines, paper making machines, warehousing management systems, and logistics management systems

System integration applications: water treatment, HVAC system, traffic monitoring system




#### **Redundant CPU**

The redundant CPU of the AH Series adopts a reliable redundancy structure, and integrates synchronous modules, Ethernet ports and serial communication interfaces for a more competitive control solution.

#### AHCPU560-EN2



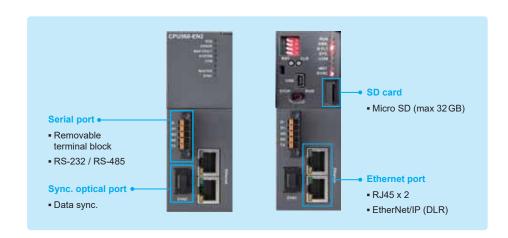

## **Redundant Backplane**

The redundant backplane of the AH Series provides redundant power supply and communciation interfaces for a complete control solution.

#### Redundant main backplane: AHBP04MR1-5A (4-slot)



Redundant expansion backplane: AHBP06ER1-5A (6-slot), AHBP08ER1-5A (8-slot)



## **Redundant System**

## **Full Redundancy Structure**

Redundant CPU Redundant main backplane Redundant power Redundant ext. ports Ring topology

#### **Modules**

Main backplane	Expansion backplane	RTU rack
■Ethernet module - AH10EN- 5A (V3)	<ul> <li>DIO</li> <li>AIO (includes temperature modules)</li> <li>Serial modules - AH10SCM-5A, AH15SCM-5A</li> </ul>	<ul><li>DIO</li><li>AIO (include temperature modules)</li></ul>
Serial module - AH10SCM-5A (V3)		

#### **Tasks**


Cyclic	Timer interrupt
70	

**CPU** built-in sync. module

CPU switch-over time: 20 ms

RTU nodes to support expansion backplanes

Standard backplanes available (under some conditions)

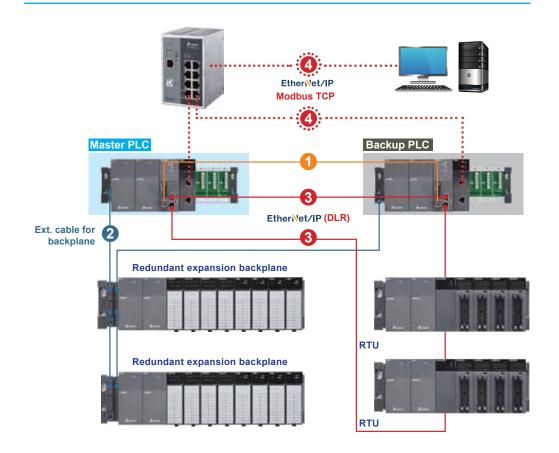











# Compact Modular Mid-range PLC

## AS

# Flexible, Smart, Friendly - The Best Choice for Automated Equipment Control



Max. I/O: 1,024 points

Program capacity: 128k steps


Data register: 60k words

Max. extension ability: 32 modules

- 32-bit SoC (System on Chip) CPU for high-performance and high-speed computing
- CPU with built-in RS-485 port\*2, mini USB port, Ethernet port, and Micro SD card slot
- Max. 8 axes control via CANopen motion network / max. 6 axes control via pulse control (200 kHz)
- Robust rackless design and patented DIN rail clips for direct plug-in/plug-out module installation and replacement
- Various modules for selection: digital I/O modules, analog I/O modules, load cell modules, temperature measurement modules, serial communication modules, industrial bus modules
- PLC programming software (ISPSoft) for program editing, hardware and network configuration, system diagnosis and axes positioning control


#### **Advanced CPU Performance**

High speed execution: up to 40k steps/ms (Condition: 40% LD instruction / 60% MOV instruction)



#### **Positioning Control - Delta's CANopen Control**

- Up to 8-axis CANopen positioning control with AS-FCOPM communication card
- Fast positioning configuration in one initialization instruction without building CANopen data exchange table
- Batch download of programmable servo drive parameters to avoid data loss
- Axis control by instructions to enhance the legibility and maintainability of PLC programs

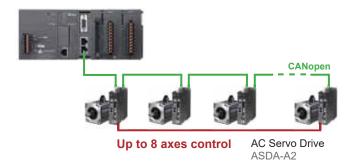


#### **Positioning Control - High-speed Pulse**

- AS332T-A / AS332P-A transistor CPU: 6 axes (or 12 channels) 200 kHz
- AS324MT-A differential CPU: 2 axes 4 MHz + 4 axes 200 kHz
- Positioning planning table for fast positioning planning and path simulation
- · Choose any given 2 axes for linear and arc interpolation

# **Flexible Network System Configuration**

- Supports star, linear network topology for fast expansion and management on production lines
- · Compatible with IT network; no independent network or IT technician required
- Combines with Delta's industrial Ethernet solutions to construct IoT for more automation application and industrial upgrades





#### **New Programming Software**

#### Various, Convenient Software Wizards for Effortless Planning

## **Positioning Planning Table**

2D simulation

Intuitive 2D track simulation without complicated calculation for real-time path planning

Path list

Multiple combination for positioning modes and tracks; and fast path planning via table-structured planning

Axis parameter setting

Intuitive configuration interface for easy axis parameter setting without manual reference

### **Complete Diagnosis Tools for Quick and Effective System Monitoring**

#### Data Logger / Tracer

• Real-time monitoring:

High-speed tracer for fast sampling within 1 scanning cycle

Stable logging:

Long-time data logger saves up to 32,768 data records, able to be transferred to SD cards

Precise data capture:

Supports a variety of sampling intervals, trigger modes, software settings, and hardware execution


Convenient comparison:

Multiple data logs in various data formats can be recorded at the same time

• Efficient data analysis:

Supports trend display, scaling, arrangement, merge and measurement

# Real-time Stable



### **Applications**

High-end equipment for electronics manufacturing, machinery processing, food packaging and other industries




# **High Performance PLC**

DVP-EH3

# **Excellent for OEM Monitoring Solutions**

High-end model of Delta's DVP-E Series PLC with large program capacity and data registers for demanding and complex applications



#### **Excellent Motion Control**

- High-speed pulse output: max. 4 axes of 200 kHz pulse output (DVP40/48/64/80EH00T3)
- Supports max. 4 hardware 200 kHz high-speed counters
- Various motion control instructions to achieve high-speed and high-precision positioning control for labeling machines, packaging machines, printing machines and more applications
- Linear/ arc interpolation motion control function
- Up to 16 external interrupt pointers

#### **Complete Program Protection**

- · Auto backup function prevents program and data loss even when the battery runs out
- · Secondary backup function saves an extra copy of programs and data to enhance program safety
- Up to 4-level password protection protects your source programs and intellectual property

#### **Function Cards**

• For RS-232/RS-422 Communication (COM3 Port, DVP-EH3 Series PLC only)





DVP-F422



DVP-F485



• For Ethernet Communication

DVP-FEN01



Analog Input/Output

DVP-F2AD DVP-F2DA



# Standard PLC / Analog I / O PLC

DVP-ES2/EX2

# **Comprehensive Functions for General Applications**

Standard PLCs with integrated communication and highly efficient processing ability for your control systems

- Standard PLC DVP-ES2 Series:
  - 16/20/24/32/40/60/80 I/O points for a variety of applications
  - No battery required; RTC function operates for at least one week after power off (hardware version 2.0 or above)
  - DVP32ES2-C model with built-in CANopen (Baud: 1 Mbps)
- Analog I/O PLC DVP-EX2 Series:

DVP-20EX2 model:

- Built-in 12-bit 4 analog inputs / 2 analog outputs; and 14-bit analog I/O extension module
- Built-in PID auto tunning function for complete analog control solution DVP30EX2 model as temperature and analog I/O PLC
- · Program capacity: 16k steps
- · Data register: 10k words
- Max. execution speed of basic instructions: 0.35 µs
- · Highly efficient processing abillity: 1k steps of programs can be completed within 1ms
- Max. 100 kHz pulse control; specific motion control instructions (mark/masking and instant frequency changing) available for multi-axis applications
- Up to 4-level password protection protects your source programs and intellectual property





# **Network Type Advanced Slim PLC**

**DVP-SE** 

#### Complete network communication functions for advanced industrial applications

- · Program capacity: 16k steps
- · Data register: 12k words
- Max. execution speed of basic instructions: 0.64 μs
- **Built-in Ethernet**
- DVP12SE: Modbus & Ethernet/IP (explicit message)
- DVP26SE: Modbus & Ethernet/IP (adapter mode, explicit message)
- · IP Filter function as firewall for first line protection against malware and network threats
- No battery required; RTC function operates for 15 days after power off
- Support DVP-S Series modules (left-side and right-side) (DVP26SE only supports right-side modules)







# **High Performance Slim PLC**

DVP-SV2

Best Choice for Slim Type PLC

High-end model of DVP-S Series with larger program capacities and data registers for more demanding and complex applications







#### **Excellent Motion Control**

- High-speed pulse output: 4 axes of 200 kHz pulse output
- Support max. 4 hardware 200 kHz and 2 hardware 20 kHz high speed counters
- Various motion control instructions to achieve high-speed and high-precision positioning control for labeling machines, packaging machines, printing machines and more applications
- · Linear/arc interpolation motion control function
- Provide up to 16 external interrupt pointers

#### **Complete Program Protection**

- · Auto backup function to prevent program and data loss even when the battery runs out
- · Secondary backup function saves an extra copy of programs and data to enhance program safety
- Up to 4-level password protection protects your source programs and intellectual property

Support DVP-S Series modules (left-side and right-side); additional new Ethernet communication command (ETHRW)

#### High-speed Modules (Left-side)

#### **Network Modules**

 DeviceNet Master **DVPDNET-SL** 



 CANopen Master DVPCOPM-SL



 Analog Input DVP04AD-SL



 Analog Output DVP04DA-SL

 Ethernet DVPEN01-SL



**PROFIBUS DP Slave** DVPPF02-SL



 RS-422/RS-485 Serial BACnet MS/TP Slave **Serial Communication** Module DVPSCM52-SL



**Load Cell Modules** 

**Analog Input/Output Modules** 

DVP01LC-SL DVP02LC-SL DVP201LC-SL DVP211LC-SL DVP202LC-SL



DVPSCM12-SL

Communication

Module

# Standard Slim PLC

# DVP-SS2

### **Economic and compact model**

- Max. I/O: 480 points
- Program capacity: 8k steps
- · Data register: 5k words
- Max. execution speed of basic instructions: 0.35 μs
- Built-in RS-232 and RS-485 ports (Master/Slave)
- Support standard MODBUS ASCII/RTU protocol and PLC Link function
- Motion control functions:
  - 4 points of 10 kHz pulse output
  - 8 points of high-speed counters: 20 kHz/4 points, 10 kHz/4 points



# Advanced Slim PLC

## DVP-SA2

## Advanced model supporting highspeed modules (left-side)

- · Program capacity: 16k steps
- Data register: 10k words
- Max. execution speed of basic instructions: 0.35 μs
- Built-in 1 RS-232 and 2 RS-485 ports (Master/Slave)
- Support standard Modbus ASCII/RTU protocol and PLC Link function
- No battery required; RTC function operates for 15 days after power off

- Support DVP-S Series modules (including left-side high-speed modules)
- Motion control functions:
  - 4 points of high-speed pulse output: 100 kHz/2 points, 10 kHz/2 points
  - 8 points of high-speed pulse input: 100 kHz/2 points, 10 kHz/6 points, 1 set of A/B phase 50 kHz
  - Support 2-axis linear and arc interpolation



# Analog I/O Slim PLC

## DVP-SX2

# Analog model with highly efficient PID control function

- · Program capacity: 16k steps
- Data register: 10k words
- Max. execution speed of basic instructions: 0.35 μs
- Built-in 4 analog inputs/2 analog outputs
- Support standard Modbus ASCII/RTU protocol and PLC Link function
- No battery required; RTC function operates for at least one week after power off (hardware version 2.0 or above)
- Support DVP-S Series modules (including left-side high-speed modules)
- · Motion control functions:
  - 4 points of high-speed pulse output: 100 kHz/2 points, 10 kHz/2 points
  - 8 points of high-speed pulse input: 100 kHz/2 points, 10 kHz/6 points
  - Support 2-axis linear and arc interpolation





# **Multi-axis Motion Controller**

DVP-10MC/15MC/50MC New

High Speed, High Precision, and High Performance Motion Control

#### **6-axis Motion Controller**

DVP15MC11T-06 (CANopen) DVP50MC11T-06 (EtherCAT)

16-axis Motion Controller DVP10MC11T (CANopen)

24-axis Motion Controller DVP15MC11T (CANopen) DVP50MC11T (EtherCAT)





DVP-10MC


DVP-15MC

DVP-50MC

#### **Perfect Controllers for EtherCAT / CANopen Motion Solutions**

- Built-in 16/24 I/O points; max. 480 I/O points
- · Program capacity:
  - DVP10 MC: Ladder 16 k steps / Motion 1 Mbytes
  - DVP15MC/50MC: 20M bytes
- Built-in Ethernet, RS-232 and RS-485 ports, and support standard Modbus ASCII/RTU protocol
- e-CAM function (2.048 points) for rotary / flying shears
- Support DVS-S Series modules (both left and right side) for multiple options
- Flexible industrial networking applications (DeviceNet Master/Slave, CANopen Master/Slave and PROFIBUS DP Slave modules)
- Provide standard communication cables, terminal resistors, distribution boxes and more accessories for easy wiring and connection

#### **System Configuration (CANopen Motion)**

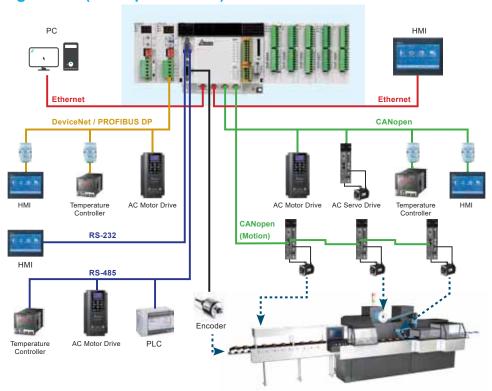

# **General Motion Controller**

#### DVP-PM

#### **Standard Motion Controller**

#### DVP10PM00M

Built-in 24 I/O points. Max. 256 I/O points

Program capacity: 64 k steps

Data register: 10k words

Execution speed LD: 0.1375 μs, MOV: 2.1 μs

· Built-in RS-232 and RS-485 ports

• 2 / 3 / 4 / 5 / 6 axes linear interpolation motion control

- Highly accurate PWM 200 kHz output, resolution 0.3%
- 8 groups of high-speed captures (mark correction, frequency measurement), comparative output, Mark / Mask function (for bag making)
- Support standard Modbus ASCII/RTU protocol
- Motion control functions:
  - High-speed pulse output: built-in 6 sets of A/B phase pulse outputs
  - 6 sets of high-speed counters and hardware digital filter for counting
  - Single-axis motion control function (supports MPG, single-speed and two-speed positioning)
  - Electronic gear function



• Built-in 16 I/O points. Max. 512 I/O points

Program capacity: 64 k steps

• Data register: 10k words

- Built-in RS-232 and RS-485 ports
- Compatible with G-code / M-Code
- 3-axis linear/arc/helical interpolation
- Support electronic cam (2,048 points) function for flying shear and rotary cut applications
- All models can be applied as motion controllers or extension modules
- Support standard Modbus ASCII/RTU protocol
- · Motion control functions:
  - Built-in A/B phase differential signal outputs:  $2 \, \text{sets} \, (\text{DVP20PM00D})/3 \, \text{sets} \, (\text{DVP20PM00M})$  with differential output frequency of max.  $500 \, \text{kHz}$
  - Support MPG inputs
  - Single-axis motion control function (supports MPG, single-speed and two-speed positioning)
  - Electronic gear function







# **Human Machine Interface**

**DOP-100** 

Connect Your Work, Step into the Cloud

# **Advanced Type HMI**

# 12-inch Advanced Multimedia HMI

# DOP-112MX

- 12" 24 bits colors TFT/Display resolution: 1,024 x 768 pixels
- Dual core 1GHz CPU/1 GB RAM/8 GB ROM
- · 2 built-in Ethernet ports/Support SD card
- 2 sets of COM ports/2 extension COM ports, support up to 4 RS-485
- · Support Analog/IP camera functions & multilingual input
- Mini USB client/USB host
- Support FTP/Email/VNC/Web monitor



# 15-inch Advanced Multimedia HMI

# DOP-115MX

- 15" 24 bits colors TFT/Display resolution: 1,024 x 768 pixels
- Dual core 1GHz CPU/1 GB RAM/8 GB ROM
- · 2 built-in Ethernet ports/Support SD card
- 2 sets of COM ports/2 extension COM ports, support up to 4 RS-485
- Support Analog/IP camera functions & multilingual input
- Mini USB client/USB host
- Support FTP/Email/VNC/Web monitor



# 4.3-inch Advanced HMI

## DOP-103WQ

- 4.3" 65,536 colors TFT/Display resolution: 480 x 272
- Cortex-A8 800MHz CPU/512 MB RAM/256 MB ROM
- Built-in Ethernet
- 1 COM port/1 extension COM port
- Multilingual input
- USB host
- Support FTP/Email/VNC/Web monitor



## 7-inch Advanced HMI

## DOP-107WV

- 7" 65,536 colors TFT/Display resolution: 800 x 480
- Cortex-A8 800MHz CPU/512 MB RAM/256 MB ROM
- Built-in Ethernet
- 2 sets of COM ports/1 extension COM port
- Multilingual input
- USB host
- Support FTP/Email/VNC/Web monitor



## 10-inch Advanced HMI

## DOP-110WS

- 10.1" 65,536 colors TFT/Display resolution: 1,024 x 600
- Cortex-A8 800MHz CPU/512 MB RAM/256 MB ROM
- Built-in Ethernet/Support SD card
- 2 sets of COM ports/1 extension COM port
- USB host
- Support FTP/Email/VNC/Web monitor



# 12-inch Advanced HMI

# DOP-112WX

- 12" 24 bits colors TFT/Display resolution: 1,024 x 768 pixels
- Dual core 1GHz CPU/1 GB RAM/8 GB ROM
- 2 built-in Ethernet ports/Support SD card
- 2 sets of COM ports/2 extension COM ports, support up to 4 RS-485
- Multilingual input
- · Mini USB client/USB host
- Support FTP/Email/VNC/Web monitor





# **Advanced Type HMI**

## 15-inch Advanced HMI

## DOP-115WX

- 15" 24 bits colors TFT/Display resolution: 1,024 x 768 pixels
- Dual core 1GHz CPU/1 GB RAM/8 GB ROM
- 2 built-in Ethernet ports/Support SD card
- 2 sets of COM ports/2 extension COM ports, support up to 4 RS-485
- · Multilingual input
- Mini USB client/USB host
- Support FTP/Email/VNC/Web monitor



# **Standard Type HMI**

# 7-inch Standard Ethernet HMI

## DOP-107EV

- 7" 65,536 colors TFT/Display resolution: 800 x 480
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- Built-in Ethernet
- 2 sets of COM ports/1 extension COM port
- USB host
- Support FTP/Email/VNC/Web monitor



# 7-inch Standard Ethernet HMI

# DOP-107EG

- 7" 65,536 colors TFT/Display resolution: 800 x 600
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- · Built-in Ethernet/Support SD card
- · 2 sets of COM ports/1 extension COM port
- USB host
- Support FTP/Email/VNC/Web monitor



## 7-inch Standard HMI

# DOP-107CV

- 7" 65,536 colors TFT/Display resolution: 800 x 480
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- 2 sets of COM ports/1 extension COM port
- USB host



# 10-inch Standard HMI

## DOP-110CS

- 10.1" 65,536 colors TFT/Display resolution: 1,024 x 600
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- 2 sets of COM ports/1 extension COM port
- USB host



# **Basic Type HMI**

# 4.3-inch Basic HMI

## DOP-103BQ

- 4.3" 65,536 colors TFT/Display resolution: 480 x 272
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- 1 COM port/1 extension COM port
- USB host



# 7-inch Basic HMI

## DOP-107BV

- 7" 65,536 colors TFT/Display resolution: 800 x 480
- Cortex-A8 800MHz CPU/256 MB RAM/256 MB ROM
- 1 COM port/1 extension COM port
- USB host





# WinCE Human Machine Interface

## DOP-W

High Color, High Resolution Human Machine Interfaces

## 10-inch WinCE HMI

#### DOP-W105B

- 10.4" 65,536 colors TFT LCD
- Display resolution: 800 x 600 pixels
- · 1GHz high speed processor
- Support audio output (MP3, Wav files)
- USB host for direct connection to USB disk, printer, mouse and keypad
- 2 Ethernet ports
- Support SDHC card
- Support video format: MPEG1, MPEG2, WMV
- Support audio output: MP3, Wav files (built-in front speaker)



## 12-inch WinCE HMI

#### DOP-W127B

- 12" 65,536 colors TFT LCD
- Display resolution: 1,024 x 768 pixels
- 1GHz high speed processor
- · Aluminum enclosure with dark gray mold texturing
- 2 sets of COM ports, support RS-232/RS-422/ RS-485
- USB host for direct connection to USB disk, printer, mouse and keypad

- 2 Ethernet ports
- Support SDHC card
- Support video format: MPEG1, MPEG2, WMV
- Support audio output: MP3, Wav files (built-in frontspeaker)



# 15-inch WinCE HMI

#### DOP-W157B

- 15" 65,536 colors TFT LCD
- Display resolution: 1,024x768 pixels
- · 1GHz high speed processor
- · Aluminum enclosure with dark gray mold texturing
- 2 sets of COM ports, support RS-232/RS-422/ RS-485
- USB host for direct connection to USB disk, printer, mouse and keypad

- 2 Ethernet ports
- Support SDHC card
- Support video format: MPEG1, MPEG2, WMV
- Support audio output: MP3, Wav files (built-in front speaker)



# Handheld Human Machine Interface DOP-H

# 7-inch Widescreen Handheld HMI

DOP-H07

- 7" 16:9 widescreen, 65,536 colors TFT
- Display Resolution: 800 x 480 pixels
- · Support SDHC card
- Built-in emergency stop switch
- Built-in enable switch (rear side)
- Serial communication models support RS-485/RS-422
- Ethernet communication models support one Ethernet port
- Optional MPG (Manual Pulse Generator)
- Compact and lightweight 750g design
- Integrated style cables available (5 m/10 m)







# Touch / Text Panel Human Machine Interface

TP

## 4-Line Text Panel HMI

TP04G-AL-C / TP04G-AL2

- 4.1" STN-LCD
- · User-defined function keys available
- Support RS-232/RS-422/RS-485 ports (TP04G-AL2)
- · Password protection function available
- User-defined boot screen available
- Built-in real time clock (RTC)

Dimensions	4.1" (101.8 × 35.24 mm)
Resolution	192 × 64
Display Color	Monochrome
Flash Memory	256k bytes
Function Key	10 function keys
Password	Available
Recipe Function	N/A
RTC	Available
Serial COM Port	RS-232 & RS-422/485
Editing Software	TPEditor

## 4-Line Text Panel HMI

TP04G-BL-C

- 4.1" STN-LCD
- 0~9 numeric keys and user-defined function available
- Built-in RS-232 and RS-422/RS-485 ports
- Support Modbus ASCII/RTU modes
- · Password protection function available
- User-defined boot screen available
- Built-in real-time clock (RTC)

Dimensions	4.1" (101.8 × 35.24 mm)
Resolution	192 × 64
Display Color	Monochrome
Flash Memory	256k bytes
Function Key	17 function keys
Password	Available
Recipe Function	N/A
RTC	Available
Serial COM Port	RS-232 & RS-422/485
Editing Software	TPEditor

# 8-Line Text Panel HMI

TP08G-BT2

- 3.8" STN-LCD
- Resolution: 240 x 128 dots
- Built-in 1,024k bytes flash memory
- 24 user-defined function keys
- Built-in RS-232 and RS-422/RS-485 ports
- Support recipes and macro functions

Dimensions	3.8" ( 83 x 41 mm)
Resolution	240 × 128
Display Color	Monochrome
Flash Memory	1M bytes
Function Key	24 function keys
Password	Available
Recipe Function	Available
RTC	Available
Serial COM Port	RS-232 & RS-422/485
Editing Software	TPEditor

### **Applications**

High-end equipment for the electronics manufacturing, machining, food packaging and other industries

# 7-Inch Touch Panel HMI with Built-in PLC

#### TP70P-RM0

- Adopt the core of DVP-SS2 Series PLC: program capacity: 2k steps / D device: 5k words
- 7" TFT-LCD
- Touch screen
- Built-in USB port for program upload/download
- Built-in RS-232 and RS-485 ports
- Support Modbus ASCII/RTU modes
- Built-in real-time clock (RTC)

Dimensions	7" (154 × 85 mm)
Resolution	800 × 480
Display Color	65,535 colors
Flash Memory	64 M bytes
Function Key	N/A
Password	Available
Recipe Function	N/A
RTC	Available
Serial COM Port	RS-232 & RS-485
Editing Software	TPEditor

# 7-Inch Touch Panel HMI with Built-in PLC

### TP70P

- Adopt the core of DVP-SS2 Series PLC: program capacity: 4k steps / D device: 5k words
- Provide 2 sets of 10 kHz high-speed pulse input
- 7" TFT-LCD
- Touch screen
- Built-in USB port for program upload/download
- Built-in RS-485 port\*2
- Support Modbus ASCII/RTU modes
- Built-in real-time clock (RTC)
- Digital and analog I/O terminals available

Dimensions	7" (154 × 85 mm)
Resolution	800 × 480
Display Color	65,535 colors
Flash Memory	64 M bytes
Function Key	N/A
Password	Available
Recipe Function	N/A
RTC	Available
Serial COM Port	2 sets of RS-485
Editing Software	TPEditor

# 4-Line Text Panel HMI with Built-in PLC

## TP04P

- Adopt the core of DVP-SS2 Series PLC: program capacity: 8 k steps / D device: 5k words
- Provide 2 sets of 10 kHz high-speed pulse input
- 4.1" STN-LCD
- Provide 0~9 numeric keys with user-defined function
- Built-in USB port for program upload/download
- Built-in RS-485 port\*2
- Support Modbus ASCII/RTU modes
- User-defined boot screen available
- Built-in real-time clock (RTC)
- Digital and analog I/O terminals available

Dimensions	4.1" (101.8 × 35.24 mm)
Resolution	192 × 64
Display Color	Monochrome
Flash Memory	1M bytes
Function Key	17 function keys
Password	Available
Recipe Function	N/A
RTC	Available
Serial COM Port	2 sets for RS-485
Editing Software	TPEditor





# **Photoelectric Sensor**

## PS-R

- Different sensing range adjustment (Trimmer or TEACH)
- M3 mounting hole, easy to install
- Electrical circuit protection
- IP67 and CE certification



## PS-F/PS-L

- Slim and small, easy to install
- Electrical circuit protection
- IP67 and CE certification



## PS-M

- Standard size (M18) for mounting
- Sensing range adjustment (TEACH)
- M3 mounting hole, easy to install
- Electrical circuit protection
- IP67 and CE certification



# **Inductive Proximity Sensor**

## IS

- Nickel-coated brass
- Standard sensors for detecting ferrous metals
- Electrical circuit protection
- IP67 and CE certification





# Laser Displacement www

## LD

- · Aluminum case, strong structure
- · Slim and small, easy to install
- High precision, sampling time setting available
- IP67 and CE certification



## Area Sensor New

## AS-B Standard

- · Aluminum case, strong structure
- No dead zone
- Effective aperture angle: less than 2.5 degrees
- · IP67 and CE certification
- \* Note: TX cable (grey) and CX cable (black)



## AS-B Communication

- · Aluminum case, strong structure
- Fixed/floating mask
- Interlock/restart functions
- Measurement function
- Auto-upload
- \* Note: TX cable (grey) and CX cable (blue)



## AS-E

- · Aluminum case, strong structure
- Compact design: 17x15mm
- Sensing distance: 5 m



#### **Applications**

Electronics, warehousing/logistics, wood and steel processing, textile, food and beverage, machine making, protection and more



# **Rotary Encoder**

# ES / EH / HS / HH

#### **Incremental**

Configurable resolution (magnetic)

• Wide input voltage: 5~30 V<sub>DC</sub>

• Resolution: 100~4,096 PPR

• Output form: open collector, line driver, push pull

• HS/ES outer diameter of solid shaft : 37 mm, 50 mm

• EH outer diameter of hollow shaft: 37 mm, 50 mm




Solid Mandrel
ES5 / ES3 (Optical)
HS5 / HS3 (Magnetic)


Hollow Mandrel
EH5 / EH3 (Optical)
HH5 / HH3 (Magnetic)<sup>coming soon</sup>

#### **Applications**


Label printing machines, detecting machines, elevators, bottling machines, cutting machines, elevator doors, testing/inspection machines




**Label Printing Machine** 



**Cutting Machine** 



**Bottling Machine** 



**Testing/Inspection Machine** 

## Handheld Barcode Scanner

## DAH1000S/DAH2000

## Wide Target Range, Fast and Reliable Capture

The DAH Series adopts high-end decoding algorithm to read barcodes quickly, and can easily and stably identify 1D and 2D barcodes within 5 to 25 cm size range and caters to various industrial barcode scanning application requirements.


- Fast code capture speed without aiming precisely
- Easy to read barcodes under low contrast, optical noise, uneven exposure or damaged conditions
- · Easy commands for users to set up:
  - Manually adjust illumination based on various environment
  - Support single and multiple trigger modes
  - Manually select barcode types based on user's demands
  - Users can self-define the exported data of scanned codes for flexible usage
- · Robust design: drop impact resistance at 1m high
- No detachable components save maintenance cost



#### **Applications**

Food and beverage packaging, electrical machines, printing machines, pharmaceutical machinery, automated product line

#### **Advanced Decode Algorithm for Excellent Reading Performance**

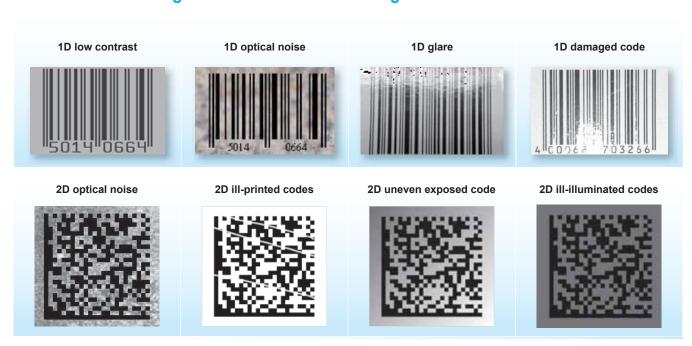



## Fixed-mount Barcode Scanner


## **DFS131**

The DFS Series adopts built-in LED indicators and a CMOS sensor to ensure effective barcode detection under any lighting conditions when objects passing through a scanning area without manual adjustment. It is applicable to industrial conveyors and can easily complete scanning through the operating route during manual handling for fully automatic barcode scanning. In addition, the DFS131 Series supports various installations for independent and embedded applications as a flexible and highly efficient barcode scanner.

- Flexible design, suitable for independent, embedded applications and various installations
- Built-in LED indicators and CMOS sensor to ensure valid reading under any lighting conditions
- Barcodes attached to products or components can be effectively detected when passing through ascanning area without manual operation
- Manual-free image trigger function is matched with structures and conveyors to achieve fully automatic barcode reading capabilities



# System Structure





#### **Applications**

Retail, logistics, manufacturing, medical services









Retail

Logistics

Manufacturing

**Medical Service** 


## Vision Sensor New

## VIS

The VIS Series adopts built-in LED lighting and CMOS sensor. With assisted LED lighting, it is able to sense under poor illumination. Users can set up programs easily in the full-window interface for object presence/ absence inspection and multi-barcode reading applications. The VIS Series can be implemented in the production line for fully automated inspection to enhance production efficiency.

- Advanced embedded system for high-speed inspection capabilities
- · Compact in size for flexible installation
- · User-friendly interface for easy setup
- Support program setup via browsers for simple and rapid device adjustment
- Built-in LED lighting, no need to purchase additional lighting device



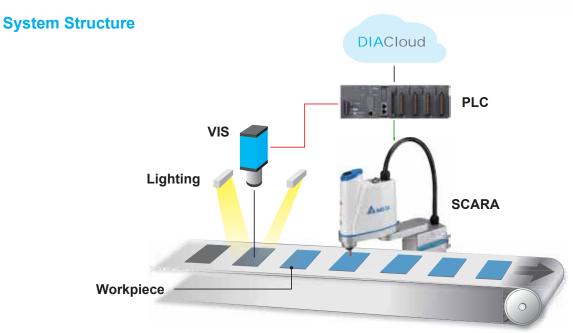

#### **Applications**

Automated quality inspection for packaging, electronics manufacturing and product assembly







**Quality Assurance** 



**Object Presence/Absence Inspection** 



# **Advanced Intelligent Temperature Controller**

DT3

High Speed, High Precision, High Performance Multifunction Temperature Controller




#### **Applications**

Solar panel manufacturing, food and beverage packaging, pharmaceuticals, semiconductors, rubber and plastics, high-tech electronics industries, air-conditioning and heating system


#### **Remote Control**

Sets DT3 temperature via analog output of host controller

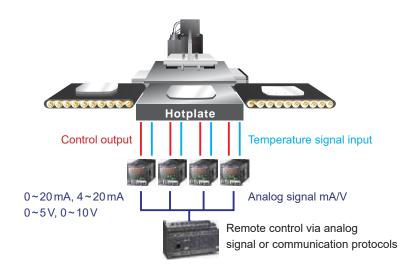

#### **Various Control Modes**

- Auto tuning
- FUZZY
- Manual
- ON/OFF
- · PID process control
- Self tuning

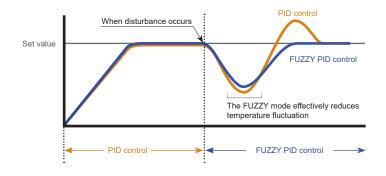

#### **User-defined Function Keys**

- · Control modes selection
- · Alarm clearing
- Controller ON/OFF
- Start PID
- Save menu
- · Process control ON/OFF



### **Large Tri-color LCD Display**

The 1<sup>st</sup> tri-color LCD temperature controller in Taiwan



#### **Heater Disconnection Detection**

Measurable up to 100A




# Point-to-Point Control (Proportional Output mA/V)

Sets the Present Value by point-to-point control




### **Retransmission Output**



### **Dual-output Control**

- Preset temperature is rapidly attained using two sets of outputs for heating and cooling control
- AT function is used to automatically calculate two sets of PID parameters, one for heating and one for cooling



## **Temperature Sensor Input**

- Thermocouple:K, J, T, E, N, R, S, B, L, U, TXK
- Platinum Resistance Thermometer: Pt100, JPt100, Cu50, Ni120
- Analog Input: 0~5V, 0~10V, 0~20mA, 4~20mA, 0~50mA

#### **Power Output**

Relay, current 4~20 mA, pulse voltage, analog voltage 0~10 V

#### **Power Input**

AC 100~240 V, 50/60 Hz, AC/DC 24 V ± 10%



# Intelligent Temperature Controller

## DTK

- Power input: AC 100~240 V, 50/60 Hz
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK (support max. 8 sets of input)
- Platinum resistance: Pt100, JPt100 (support max. 6 sets of input)
- RTD: Cu50, Ni120
- Output: Relay, current 4~20 mA, pulse voltage
- · Control mode: ON-OFF, PID, manual
- Modbus communication (optional)
- 1 set of alarm output (2 sets of alarm outputs are optional), 9 alarm modes
- · Certification: CE, UL



- Power input: AC 100~240 V, 50/60 Hz
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
- Platinum resistance: Pt100, JPt100
- RTD: Cu50
- Analog input: N/A
- · Output: Relay, current, pulse voltage
- · Control mode: ON-OFF, PID, manual
- Modbus communication (optional)
- · 2 sets of alarm outputs, 12 alarm modes
- Dimensions: 48x48, 48x96, 72x72, 96x48, 96x96 (mm)
- IP66 protection
- · Certifications: CE, UL

# **Advanced Temperature Controller**DTB

- Power input: AC 100~240 V, 50/60 Hz, DC 24 V±10%
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
- Platinum resistance: Pt100, JPt100
- Analog input: 0~5 V, 0~10 V, 0~20 mA, 4~20 mA, 0~50 mA
- Output: Relay, current 4~20 mA, pulse voltage, analog voltage 0~10 V
- Control mode: ON-OFF, PID, manual, PID process control
- Built-in Modbus communication
- 2 sets of alarm outputs, 18 alarm modes
- Dimensions: 48x24, 48x48, 48x96, 96x96 (mm)
- IP66 protection
- · Certifications: CE, UL





# **Modular Temperature Controller**

## DTC

- Power input: DC 24V±10%
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
- Platinum resistance: Pt100, JPt100
- Analog input: 0~5 V, 0~10 V, 0~20 mA, 4~20 mA, 0~50 mA
- Output: Relay, current 4~20 mA, pulse voltage, analog voltage 0~10 V
- · Control mode: ON-OFF, PID, manual, PID process control
- Built-in Modbus communication
- 2 sets of alarm outputs, 18 alarm modes
- · Certifications: CE, UL



## DTV

- Power input: AC 100~240 V, 50/60 Hz, DC 24 V±10%
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK
- Platinum resistance: Pt100, JPt100
- Analog input: 0~5V, 0~10V, 0~20mA, 4~20mA, 0~50mA
- Output: Relay, current 4~20 mA, pulse voltage, analog voltage 0~10'
- · Control mode: ON-OFF, PID, manual, PID process control
- · Built-in Modbus communication
- 2 sets of alarm outputs, 17 alarm modes
- Dimensions: 48 x 96, 96 x 96 (mm)
- IP66 protection
- · Certifications: CE, UL

# Multi-Channel Modular Temperature Controller

- Power input: DC 24V±10%
- Thermocouple: K, J, T, E, N, R, S, B, L, U, TXK (Supports max. 8 sets of input)
- Platinum resistance: Pt100, JPt100 (Supports max. 6 sets of input)
- RTD: Cu50, Ni120
- Analog input: N/A
- Output: Relay, current 4~20 mA, pulse voltage, analog voltage 0~10 V
- · Control mode: ON-OFF, PID, manual, PID process control
- Built-in Modbus communication
- 2 sets of alarm outputs, 18 alarm modes
- · Certifications: CE, UL









# **Standard Multifunction Pressure Sensor**

## DPA

## **High-Precision Pressure Sensor with Comprehensive Functions**

- Measurement range:
  - DPA01: -100 kPa~100 kPa
  - DPA10: -100 kPa~1,000 kPa
- 3 sets of color display
- Easy code display
- · Various unit conversions
- Various output modes
- Support RS-485 communication and analog output
- 10 sets of output response time setup
- Safety control function
- Energy-saving mode



# **Basic Multifunction Pressure Sensor**

#### DPB

## Miniature Pressure Sensor for Easy Integration and Cost-saving

- Measurement range:
  - DPB01: -100 kPa~100 kPa
  - DPB10: -100 kPa~1,000 kPa
- Various unit conversions
- 10 sets of output response time setup
- Various output modes
- · 3 sets of color display
- Fast zero reset
- Safety control function
- Easy code display



#### **Applications**

Machine making, solar energy, food packaging, semiconductor, electronics, assembly automation

## Flow Switch New

## **DFM**

## High-precision and Multiple Air Flow Range

- Flow range: 2~200 L/min
- Bidirectional flow amount measurement, unaffected by fluid direction
- Embedded Laminar Flow Element (LFE), no extra straight pipes needed for stabilizing air flow
- · Easy installation and maintenance
- · High quality LCD display
- · Support analog output



Food and beverage packaging, electronic manufacturing, rubber and plastic welding, Laser Beam Machining (LBM), factory air compressor (for energy saving), nitrogen generator, air compressor flow record and detection

## Timer/Counter/Tachometer

## CTA


#### All-in-One

- Power input: AC 100~240 V, 50/60 Hz, DC 24 V ± 10%
- Simultaneous counting and timing in the mixed mode
- · 6-digit LCD display
- Max. counting speed: 10 Kpps
- NPN or PNP input signals
- · Pre-scale function
- Counting modes: 1-stage, 2-stage, batch, total, dual
- Modbus communication (optional)


## **Applications**

Food packaging machines, label printing machines, fixed length cutting machines, logistics, electronics





#### **Fixed Length Cutting Machine**









# Power Meter DPM

## **High Accuracy Solution for Reliable Power Monitoring**

Precisely measures various electrical energy and power quality parameters (power factors, harmonics, and current/voltage unbalance) with functions such as off-limit alarms, history logs, communication quality and monitoring; suitable for power-critical applications

#### **Product Introduction**



#### **Features**


- Precise measurement of bidirectional electrical energy and power parameters, meeting IEC62053 and CNS14607 standards
- · Two mounting clips hold the meter in place, no other tools required
- Built-in RS-485 communication port supports Modbus protocol, and all measurement values can be transmitted to the PLCs via communication
- Parameter grouping function allows faster data transmission and reading by PLCs to improve efficiency and performance
- Total Harmonic Distortion (THD) measurement function for power quality analysis
- · Built-in alarm function for power anomaly display in real-time


#### **Applications**

The DPM series are suitable for: energy management, medium or low voltage distribution system, energy management system, factory automation system, energy storage system, electric grid measurement, and energy quality analysis

The DPM-C520W is suitable for: elevators, semiconductor plants, high-ceiling plants, and equipment with mobility

The DPM-D520I is suitable for: industrial machines, communication base station, IIoT equipment, and areas where CT is difficult to install

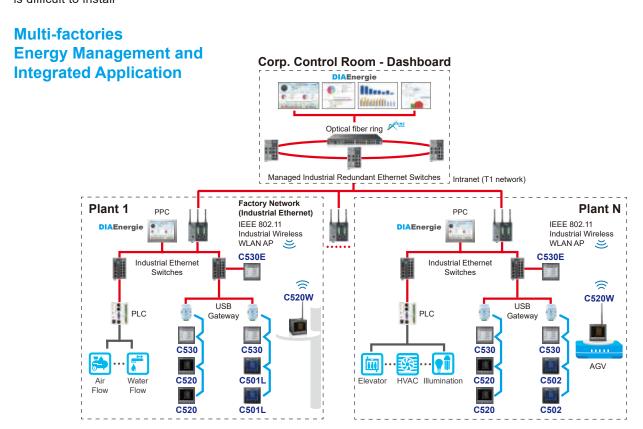

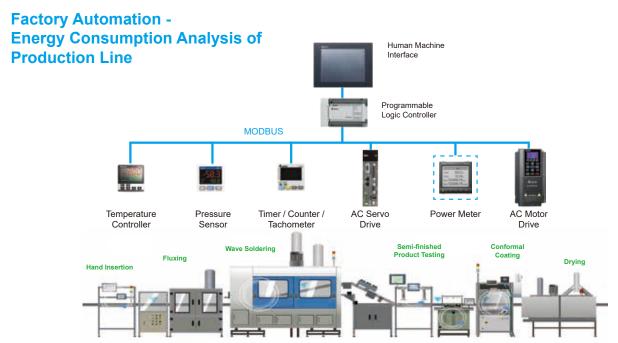



# **Machine Vision System**

### DMV2000

## Speed, Precision and Humanization

- Smart Visual Inspection



- Multiple cameras work synchronously in parallel processes to enhance efficiency and save development costs
- Image auto correction and lens distortion correction function
- · User-friendly operation interface
- Smart operation process and interface for faster programming
- · Built-in multi-functional developing tools
- Provides industrial networking module, digital I/O and flash control module for various applications
- Superior hardware specifications compared to same grade products, achieving high-speed processing
- · High-speed cameras with CameraLink interface
- Ethernet, RS-232, RS-485 interfaces for data output
- Compliant with high industrial standards; higher stability than PC-based system
- · Built-in communication system connected by PLC, no need for extra programming
- · Self-defined display and operation interfaces in operation mode

#### **Product Types**

Two types for different applications

- Standard model: 2 or 4 cameras connectable; high performance and big storage
- · Basic model: Max. 2 cameras connectable; supports GigE camera
  - \* Basic model will be released in Q4, 2018

#### **Applications**

Food and beverage packaging, electrical/electronics, printing machines, pharmaceuticals, Vision Guided Robotic System (VGRS), robot/automated production lines

### **Advanced Functions**

Functions				
2D platform positioning	$\checkmark$	Edge position tracing		$\sqrt{}$
Pattern matching	$\sqrt{}$	Edg	ge width tracing	$\sqrt{}$
Shape matching	$\sqrt{}$	S	tain inspection	$\sqrt{}$
Edge angle	$\sqrt{}$		OCV	$\checkmark$
Edge counting	$\checkmark$	Subtle inspection		$\checkmark$
Edge pitch	$\sqrt{}$	Color inspection		$\sqrt{}$
Edge position	$\sqrt{}$	Barcode identification √		$\checkmark$
Edge width	$\checkmark$	QR code identification √		$\sqrt{}$
Area	$\checkmark$		Off-line simulation	$\checkmark$
Blob	V	PC applications	Program upload/ download	$\checkmark$
Image intensity	$\sqrt{}$		Software update	$\checkmark$

# **High-speed Cameras with CameraLink Interface**

Support high-speed CameraLink Full configuration with maximum frame rate up to 690 M bytes/sec. Support maximum 12 M pixels in gray scale using standard CameraLink cameras

Resolution (Mega	Pixels)	0.3M	2M	4 M	5M	12 M
Laval	Mono	<b>√</b>	V	<b>V</b>	V	V
Level	Color	<b>√</b>	V	<b>V</b>	V	<b>√</b>
Frame Rate		480 fps	295 fps	159fps	35fps	50 fps
Pixel Dimensions (Horizontal x Vertic	al)	642×484	2,048×1,088	2,048×2,048	2,448×2,048	4,096×3,072
Sensor Size		1/3"	2/3"	1"	2/3"	1.76"
Pixel Size (Horizontal x Vertic	al)	7.4×7.4 µm	5.5×5.5µm	5.5×5.5µm	3.45×3.45 µm	5.5×5.5 µm
Lens Mount		C Mount	C Mount	C Mount	C Mount	M42





# **Machine Vision System**

DMV1000

Intelligent Human Visual Inspection System for a Variety of Applications



- User-friendly operation interface for a quick system setup
- Flowchart programming interface saves development time
- Built-in multi-functional developing tools save users from complex programming
- · Offers versatile digital I/O terminals
- · Compact and light, saves wiring and space
- Hardware specification meets high-speed processing requirements and offers exceptional performance better than competing products
- Standard FireWire 1,394 Series CCD
- Complete product line-up including lighting and lenses
- Compatible with Ethernet and RS-232/485 communication interfaces for a quick link up with external devices
- Supports SD card
- Compliant with high industrial standards; higher stability than PC-based systems

## **Applications**

Food and beverage packaging, electrical/electronics, printing machines, pharmaceuticals, Vision Guided Robotic System (VGRS), robot/automated production lines

 Bottle Cap Position Identification Identifies the bottle capping position



 Beverage Packing Inspection Inspects the liquid level of each bottle



• Luminance Inspection
Inspects LED luminance automatically



Module Inspection
 Inspects mobile phone modules such as touch screens and buttons




• **Direction Identification**Inspects the direction of workpieces conveyed on a production line




Character Inspection
 Inspects the characters on electronic devices



Position Identification
 Inspects the position of IC components on PCBs



Object Counting
 Counts the quantity of objects in a basket or carton





# **Industrial Power Supply**

# The World's Number One in Industrial Power Solutions

## **DIN Rail Models**

CliQ, CliQ II, CliQ III, CliQ M, Lyte, Chrome, Sync, DVP

CIIQ, CIIQ	II, CIIQ I	$\Pi_{i}$	100 1
CliQ	Model Name	Output Voltage	Output Power
	DRP012V015W1AZ	voitago	15W
	DRP012V030W1AZ	40) (	30W
	DRP012V060W1AA	12V	60W
	DRP012V100W1AA		100W
日 日 日 三	DRP-24V48W1AZ		48W
EE.	DRP024V060W1AZ		60W
	DRP024V060W1AA	24V	60W
THE PERSON	DRP024V120W1AA	24 V	120W
	DRP024V240W1AA		240W
	DRP024V480W1AA		480W
CliQ II	Model Name	Output	Output
	DRP024V060W1BN	Voltage	Power 60W
	DRP024V060W1NZ		60W
	DRP-24V100W1NN	24V 1-Phase	91.2W
	DRP024V120W1BN	111100	120W
	DRP024V240W1BN		240W
	DRP024V480W1BN		480W
	DRP-24V120W2BN	24V	120W
	DRP-24V240W2BN	2-Phase	240W
	DRP024V060W3BN	24V 3-Phase	60W
and the same	DRP024V120W3BN		120W
	DRP024V240W3BN		240W
- Car	DRP024V480W3BN		480W
	DRP024V960W3BN		960W
	DRP048V060W1BN		60W
	DRP048V120W1BN		120W
	DRP048V240W1BN	48V	240W
	DRP048V480W1BN		480W
		Output	Output
Modules	Model Name	Voltage	Power
Redundancy Module	DRR-20N		20A
	DRR-40N DRU-24V40ABN		40A 40A
DC-UPS Module	DRU-24V40ABN DRU-24V10ACZ	24V	40A 10A
Puffor Modulo	DRB-24V020ABN		20A
Buffer Module	DRB-24V040ABN		40A
DVP	Model Name	Output Voltage	Output Power
Ann	DVP-PS01	voitage	24W
	DVP-PS02	24V	48W
	DVP-PS03		120W

Lyte, Chrome, Sync, DVP					
CliQ III	Model Name	Output Voltage	Output Power		
	DRP-24V120W1CAN		120W		
	DRP-24V240W1CAN	24V	240W		
	DRP-24V480W1CAN		480W		
CliQ M	Model Name	Output Voltage	Output Power		
	DRM-24V80W1PN		81.6W		
	DRM-24V120W1PN		120W		
	DRM-24V240W1PN	24V	240W		
	DRM-24V480W1PN		480W		

	DRL-24V120W1AA		120W
	DRL-24V240W1AA	24V	240W
	DRL-24V480W1AA		480W
	DRL-48V120W1AA	48V	120W
Chrome	Model Name	Output Voltage	Output Power
Chrome	Model Name DRC-5V10W1AZ		
Chrome		Voltage	Power

DRM-24V960W1PN

**Model Name** 

Lyte

960W

Output Power

Output Voltage

		voitage	Power
	DRC-5V10W1AZ	5V	7.5W
	DRC-12V10W1AZ	12V	10W
	DRC-12V30W1AZ		25.2W
	DRC-12V60W1AZ		54W
	DRC-12V100W1AZ		72W
	DRC-24V10W1AZ		10W
	DRC-24V10W1HZ		10W
	DRC-24V30W1AZ	24V	30W
	DRC-24V60W1AZ		60W
	DRC-24V100W1AZ		91.2W

Sync	Model Name	Output Voltage	Output Power
	DRS-5V30W1NZ		15W
	DRS-5V50W1AZ	5V	30W
	DRS-5V50W1NZ		25W
	DRS-12V50W1NZ	12V	48W
	DRS-24V30W1AZ		30W
	DRS-24V30W1NZ		30W
	DRS-24V50W1NZ	24V	50W
	DRS-24V100W1AZ		96W
	DRS-24V100W1NZ		91.2W

## **Panel Mount Models**

# PMC, PMF, PMH, PMR, PMT, PMU

PMC	Model Name	Output	Output Power
	PMC-05V015W1AA	Voltage 5V	15W
	PMC-05V035W1AA		35W
	PMC-05V050W1AA		50W
	PMC-12V035W1AA	12V	35W
	PMC-12V050W1AA		50W
	PMC-12V060W1NA		60W
	PMC-12V100W1AA		100W
THE PERSON NAMED IN	PMC-12V150W1BA		150W
	PMC-24V035W1AA		35W
	PMC-24V050W1AA		50W
	PMC-24V075W1AA		75W
C manage	PMC-24V100W1AA		100W
	PMC-24V150W1AA	24V	150W
	PMC-24V150W2AA		150W
	PMC-24V150W1BA		150W
	PMC-24V300W1BA		300W
	PMC-24V600W1BA		600W
	PMC-DSPV100W1A	24V/5V	100W
	PMC-48V150W1BA	48V	150W
	FIVIC-46 V TOUVITEA	40 V	15000
PMF		Output	Output
PMF	Model Name	Output Voltage	Output Power
PMF	Model Name PMF-4V320WCGB	Output Voltage 4.2V	Output Power 231W
PMF	Model Name PMF-4V320WCGB PMF-5V320WCGB	Output Voltage	Output Power 231W 275W
PMF	Model Name PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB	Output Voltage 4.2V 5V	Output Power 231W 275W 201.6W
PMF	Model Name PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V240WCGB	Output Voltage 4.2V	Output Power 231W 275W 201.6W 240W
PMF	Model Name PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB	Output Voltage 4.2V 5V	Output Power 231W 275W 201.6W
I	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB	Output Voltage 4.2V 5V	Output Power 231W 275W 201.6W 240W
PMF PMH	Model Name PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V240WCGB	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W
F	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W
I	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB  Model Name	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W Output Power
I	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB  Model Name  PMH-12V100WCLS	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W
I	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB  Model Name  PMH-12V100WCLS  PMH-24V50WCAA	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W
I	Model Name  PMF-4V320WCGB  PMF-5V320WCGB  PMF-24V200WCGB  PMF-24V240WCGB  PMF-24V320WCGB  Model Name  PMH-12V100WCLS  PMH-24V50WCAA  PMH-24V100WCAA	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W 100W
I	Model Name  PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V320WCGB PMF-24V320WCGB  Model Name  PMH-12V100WCLS PMH-24V50WCAA PMH-24V100WCAA PMH-24V100WCCA	Output Voltage 4.2V 5V 24V Output Voltage 12V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W
I	Model Name  PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V320WCGB PMF-24V320WCGB  Model Name  PMH-12V100WCLS PMH-24V50WCAA PMH-24V100WCAA PMH-24V100WCCA PMH-24V100WCLS	Output Voltage 4.2V 5V 24V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W 100W 91.2W 91.2W
I	Model Name  PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V320WCGB PMF-24V320WCGB  Model Name  PMH-12V100WCLS PMH-24V50WCAA PMH-24V100WCAA PMH-24V100WCCA PMH-24V100WCLS PMH-24V100WCLS PMH-24V100WCMS	Output Voltage 4.2V 5V 24V Output Voltage 12V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W 100W 91.2W
	Model Name  PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V320WCGB PMF-24V320WCGB  Model Name  PMH-12V100WCLS PMH-24V50WCAA PMH-24V100WCAA PMH-24V100WCAA PMH-24V100WCCA PMH-24V100WCMS PMH-24V100WCNS	Output Voltage 4.2V 5V 24V Output Voltage 12V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W 100W 91.2W 91.2W
	Model Name  PMF-4V320WCGB PMF-5V320WCGB PMF-24V200WCGB PMF-24V320WCGB PMF-24V320WCGB  Model Name  PMH-12V100WCLS PMH-24V50WCAA PMH-24V100WCAA PMH-24V100WCCA PMH-24V100WCLS PMH-24V100WCMS PMH-24V100WCNS PMH-24V100WCNS	Output Voltage 4.2V 5V 24V Output Voltage 12V	Output Power 231W 275W 201.6W 240W 320W Output Power 100W 50W 100W 100W 100W 91.2W 91.2W 150W

PMR-4V320WDAA PMR-4V320WDAA PMR-4V320WDBA PMR-4V320WDCA PMR-5V320WDCA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDCA PMR-5V320WDCA  PMT-5V320WDCA  PMT-5V350W1AA PMT-5V35W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V100W1AA PMT-12V150W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-24V150W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V50W1AA PMT-24V350W1AB PMT-24V50W1AA PMT-	PMR	Model Name	Output Voltage	Output Power
PMR-4V320WDAA PMR-4V320WDGA PMR-4V320WDCA PMR-5V320WCAA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDCA PMR-5V320WDCA PMR-5V320WDBA PMR-5V320WDCA PMR-5V320WDBA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDAA PMR-5V320WDAA PMT-5V350W1AM PMT-5V35W1AA PMT-5V55W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V100W1AA PMT-12V100W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V100W1AA PMT-24V100W1AA PMT-24V30W1AA PMT-24V30W1AA PMT-24V30W1AA PMT-24V35W1AA PMT-24V30W1AA PMT-24V30W1AA PMT-24V30W1AA PMT-24V35W1AA PMT-24V3	1	PMR-4V320WCAA	voitage	
PMR-4V320WDGA PMR-4V320WDBA PMR-4V320WDCA PMR-5V320WCAA PMR-5V320WDAA S00W PMR-5V320WDGA PMR-5V320WDGA PMR-5V320WDGA SV 300W PMR-5V320WDCA S00W PMR-5V320WDCA S00W PMR-5V320WDCA S00W PMR-5V320WDCA S00W PMR-5V320WDCA S00W PMR-5V350W1AA PMT-5V350W1AA PMT-5V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V100W1AA PMT-24V350W1AA				
PMR-4V320WDCA PMR-5V320WCAA PMR-5V320WDAA PMR-5V320WDGA SV 300W PMR-5V320WDGA PMR-5V320WDGA PMR-5V320WDCA 300W PMR-5V320WDCA 300W PMR-5V320WDCA 300W PMR-5V320WDCA 300W PMT-5V350W1AM PMT-5V350W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-36V350W1AA PMT-36V350W1AA PMT-36V350W1AR PMT-36V350W1AR PMT-36V350W1AR PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-24V350W1AR PMT-D2V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMU-13V155WCCA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA 27 6V			4.2V	-
PMR-5V320WCAA PMR-5V320WDAA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDBA PMR-5V320WDCA  PMT  Model Name  PMT  Model Name  PMT-4V350W1AA PMT-5V55W1AA PMT-5V50W1AA PMT-12V50W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-3V350W1AA PMT-48V350W1AB PMT-36V350W1AB PMT-36V350W1AB PMT-38V350W1AB PMT-48V150W1AA PMT-48V150W1AA PMT-48V350W1AB PMT-10W1AA PMT-12V100W1AA PMT-12V100W1AA PMT-12V5V0W1AA PMT-10W1AA PMT-		PMR-4V320WDBA		252W
PMR-5V320WDAA PMR-5V320WDGA PMR-5V320WDCA  PMR-5V320WDCA  PMT  Model Name  Output Voltage  PMT-4V350W1AM PMT-5V35W1AA PMT-5V50W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V150W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-24V350W1AA PMT-24V35W1AA		PMR-4V320WDCA		252W
PMT-5V320WDGA		PMR-5V320WCAA		300W
PMT  Model Name  PMT  Model Name  PMT-4V350W1AM PMT-5V35W1AA PMT-5V50W1AA PMT-5V350W1AM PMT-12V35W1AA PMT-12V35W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V50W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-12V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V100W1AA PMT-24V100W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V35W1AA PMT-24V100W1AA PMT-24V35W1AA PMT-24V100W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-48V150W1AA PMT-24V35W1AA PMT-48V350W1AR PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D	<b>6</b>	PMR-5V320WDAA		300W
PMT	The Name of the Park	PMR-5V320WDGA	5V	300W
PMT    Model Name		PMR-5V320WDBA		300W
PMT-4V350W1AM 4.2V 252W PMT-5V35W1AA 5V 50W PMT-5V350W1AA 5V 50W PMT-5V350W1AA 35W PMT-12V350W1AA 50W PMT-12V350W1AA 50W PMT-12V150W1AA 50W PMT-12V150W1AA 50W PMT-12V150W1AA 50W PMT-12V150W1AA 50W PMT-12V350W1AAR 348W PMT-12V350W1AAR 348W PMT-12V350W1AA 50W PMT-24V35W1AA 50W PMT-24V350W1AA 50W PMT-24V350W1AA 50W PMT-24V350W1AA 50W PMT-24V350W1AA 50W PMT-24V350W1AA 50W PMT-24V150W1AA 50W PMT-24V150W1AA 50W PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA 48V 350.4W PMT-48V350W1AR 36V 349.2W PMT-48V350W1AR 48V 350W PMT-48V350W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMU-13V155WCBA PMU-13V155WCBA 27.6V		PMR-5V320WDCA		300W
PMT-4V350W1AM 4.2V 252W PMT-5V35W1AA 5V 50W PMT-5V350W1AM 300W PMT-12V35W1AA 5W PMT-12V35W1AA 5W PMT-12V150W1AA 5W PMT-12V150W1AA 12V 102W PMT-12V150W1AA 15W PMT-12V35W1AAR 348W PMT-12V35W1AAR 35W PMT-12V35W1AA 15V 51W PMT-24V35W1AA 50W PMT-24V35W1AA 15V 51W PMT-24V35W1AA 50W PMT-24V150W1AA 15W 156W PMT-24V150W1AA 24V 156W PMT-24V350W1AR 36V 349.2W PMT-48V150W1AA 48V 350.4W PMT-48V150W1AA 48V 350W PMT-48V150W1AA 12V/5V 84W/15W PMT-D2V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMU-13V155WCBA 13.8V 151W PMU-13V155WCBA PMU-13V155WCBA 27.6V	PMT	Model Name		
PMT-5V35W1AA 5V 50W PMT-5V350W1AA 5V 50W PMT-5V350W1AM 300W PMT-12V35W1AA 50W PMT-12V50W1AA 50W PMT-12V150W1AA 150W PMT-12V350W1AAR PMT-15V50W1AA PMT-15V50W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-D2V100W1AA 24V/5V 84W/15W POWER 151W 151W 151W 151W 151W 151W 151W 151		PMT-4V350W1AM		
PMT-5V350W1AM PMT-12V35W1AA PMT-12V50W1AA PMT-12V100W1AA PMT-12V150W1AA PMT-12V350W1AA PMT-12V350W1AA PMT-15V50W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V100W1AA PMT-24V100W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V35W1AA PMT-24V35W1AA PMT-24V350W1AA PMT-24V350W1AA PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V350W1AR PMT-D2V100W1AA PMT-D2V150WCBA PMU-13V155WCBA PMU-13V155WCBA PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA				35W
PMT-12V35W1AA PMT-12V50W1AA PMT-12V100W1AA 12V 102W PMT-12V150W1AA PMT-12V350W1AAR PMT-12V350W1AAR PMT-15V50W1AA 15V 51W PMT-24V35W1AA PMT-24V50W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V35W1AG PMT-36V350W1AG PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V350W1AR PMT-D2V100W1AA 12V/5V PMT-D2V100W1AA 24V/5V PMT-D2V100W1AA 24V/5V PMT-D2V100W1AA 24V/5V PMT-D2V100W1AA 24V/5V PMU-13V155WCBA PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA			5V	
PMT-12V50W1AA		PMT-5V350W1AM		300W
PMT-12V100W1AA 12V 102W PMT-12V150W1AA 150W PMT-12V350W1AAR 348W PMT-15V50W1AA 15V 51W PMT-24V35W1AA 50W PMT-24V50W1AA 50W PMT-24V150W1AA 108W PMT-24V150W1AA 156W PMT-24V200W1AM 211.2W PMT-24V350W1AG 350.4W PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA 48V 350W PMT-48V150W1AA 12V/5V 84W/15W PMT-D2V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA 27 6V		PMT-12V35W1AA		35W
PMT-12V150W1AA 150W 348W PMT-12V350W1AAR 15V 51W PMT-24V35W1AA 50W PMT-24V150W1AA PMT-24V150W1AA PMT-24V150W1AA PMT-24V200W1AM PMT-24V200W1AM PMT-24V350W1AG 350.4W PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA PMT-48V350W1AR PMT-D1V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W POWER PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA 27 6V		PMT-12V50W1AA		50W
PMT-12V350W1AAR PMT-15V50W1AA PMT-24V35W1AA PMT-24V50W1AA PMT-24V100W1AA PMT-24V150W1AA PMT-24V200W1AM PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-48V150W1AA PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2V150W1AA PMT-D2V1		PMT-12V100W1AA	12V	102W
PMT-15V50W1AA 15V 51W PMT-24V35W1AA 9MT-24V50W1AA 50W PMT-24V100W1AA PMT-24V150W1AA PMT-24V200W1AM 211.2W PMT-24V350W1AG 350.4W PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA PMT-48V150W1AA 48V 350.W PMT-48V350W1AR 36V 349.2W PMT-D1V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W PMU-13V155WCBA PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA 27 6V	MANAGE BLOCK	PMT-12V150W1AA		150W
PMT-24V35W1AA PMT-24V50W1AA PMT-24V100W1AA PMT-24V150W1AA PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2V150W1AA PMT-D2V1	-	PMT-12V350W1AAR		348W
PMT-24V50W1AA PMT-24V100W1AA PMT-24V150W1AA PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-48V150W1AA PMT-48V150W1AA PMT-48V350W1AR PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2V150W1AA PMT-D2V	W 1000	PMT-15V50W1AA	15V	51W
PMT-24V100W1AA PMT-24V150W1AA PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-48V150W1AA PMT-48V350W1AR PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2V150W1AA PMT-D2	1 图:初度	PMT-24V35W1AA		35W
PMT-24V150W1AA PMT-24V200W1AM PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-48V150W1AA PMT-48V350W1AR PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2V150W1AA PMT-D2		PMT-24V50W1AA	24V	50W
PMT-24V150W1AA PMT-24V200W1AM PMT-24V350W1AG PMT-36V350W1AR PMT-36V350W1AR PMT-48V150W1AA PMT-48V350W1AR PMT-48V350W1AR PMT-D1V100W1AA PMT-D2V100W1AA PMT-D2	D 35 3000			
PMT-24V350W1AG 350.4W PMT-36V350W1AR 36V 349.2W PMT-48V150W1AA 48V 350W PMT-48V350W1AR 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W  PMU Model Name Output Voltage Power PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA 27 6V 151W	-			
PMU Model Name PMU-13V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMT-36V350W1AR PMU-38V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMT-36V350W1AR PMT-36V350W1AR PMU-27V155WCBA PMU-27		= =		
PMU Model Name PMU-13V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMU-27V155WCBA PMT-48V350W1AA PMU-48V350W1AA PMU-48V350W1AA PMU-48V350W1AA PMU-48V350W1AA PMU-48V350W1AA PMU-48V150W1AA PMU-48		=		
PMU Model Name Output Voltage PMU-13V155WCBA PMU-27V155WCBA PMU-27			36V	
PMT-D1V100W1AA 12V/5V 84W/15W PMT-D2V100W1AA 24V/5V 84W/15W 84W/15W    PMU				
PMU Model Name Output Voltage Power  PMU-13V155WCBA PMU-13V155WCBA PMU-27V155WCBA  PMU-27V155WCBA 27 6V 151W				
PMU         Model Name         Output Voltage         Output Power           PMU-13V155WCBA PMU-13V155WCCA PMU-27V155WCBA         13.8V         151W           151W         151W				
PMU Model Name Voltage Power  PMU-13V155WCBA PMU-13V155WCCA PMU-27V155WCBA 27 6V 151W		PMT-D2V100W1AA		
PMU-13V155WCBA 13.8V 151W 151W 151W 151W 151W 151W	PMU	Model Name		
PMU-13V155WCCA 151W PMU-27V155WCBA 27 6V 151W	ALCOHOL: NAMED IN	PMU-13V155WCBA		151W
27 6V		PMU-13V155WCCA	13.8V	151W
PMU-27V155WCCA 27.6V 151W		PMU-27V155WCBA	27.6V	151W
		PMU-27V155WCCA		151W

# **Open Frame Models**

# PJ, PJB, PJH, PJT, PJU

PJ	Model Name	Output Voltage	Output Power
	PJ-5V15WBNA	5V	15W
	PJ-12V15WBNA		15.6W
	PJ-12V30WBNA		30W
1-20 married	PJ-12V50WBNA	12V	51.6W
100 10 10	PJ-12V100WBNA		102W
The Party of the P	PJ-12V150WBNA		150W
THE STREET	PJ-24V30WBNA		31.2W
The same same	PJ-24V50WBNA	24V	50.4W
	PJ-24V100WBNA	24 V	103.2W
	PJ-24V150WBNA		150W
	PJ-48V50WBNA	48V	52.8W
РЈВ	Model Name	Output Voltage	Output Power
PJB	Model Name PJB-24V100WBNA		
PJB			Power
PJB	PJB-24V100WBNA	Voltage	Power 103.2W
PJB	PJB-24V100WBNA PJB-24V150WBNA	Voltage	Power 103.2W 151.2W
	PJB-24V100WBNA PJB-24V150WBNA PJB-24V240WBNA	Voltage  24V  Output Voltage	Power 103.2W 151.2W 240W
	PJB-24V100WBNA PJB-24V150WBNA PJB-24V240WBNA  Model Name	Voltage 24V Output	Power 103.2W 151.2W 240W Output Power
	PJB-24V100WBNA PJB-24V150WBNA PJB-24V240WBNA  Model Name PJH-24V300WBBA	Voltage  24V  Output Voltage	Power 103.2W 151.2W 240W Output Power 300W

PJT	Model Name	Output Voltage	Output Power
	PJT-12V40WBAA PJT-12V65WBAA PJT-12V100WBAA	12V	40W 60W 100W
	PJT-12V100WBBA		80W <sup>A)</sup> 100W <sup>B)</sup>
	PJT-15V40WBAA PJT-15V65WBAA PJT-15V100WBAA	15V	40W 63W 100W
A THE STATE	PJT-15V100WBBA		80W <sup>A)</sup> 100W <sup>B)</sup> 40W
	PJT-18V40WBAA PJT-18V65WBAA PJT-18V100WBAA	18V	65W 100W
	PJT-18V100WBBA		80W <sup>A)</sup> 100W <sup>B)</sup>
	PJT-24V40WBAA PJT-24V100WBAA PJT-24V100WBAA PJT-24V100WBBA	24V	40W 65W 100W 80W A)
A) Convection B) Forced Cooling	PJT-27V150WBNA	V <sub>1</sub> : 27V V <sub>SB</sub> : 12V	100W <sup>B)</sup>
PJU	Model Name	Output Voltage	Output Power
	PJU-13V60WCBA	13V	60W
	PJU-27V60WCBA	27V	60W



# **Industrial Ethernet Switch**

## **DVS**

State-of-the-art Industrial Network Communication for Smart Industry

# **Layer 3 Managed Switch**

DVS-G928W01 New

- 28-Port full GbE (10GbE optional), modular design for flexible configuration
- Layer 3 routing function allows multiple subnets in a large network to exchange data and information across a network address
- Complete L2 network management functions: Q-in-Q VLAN, QoS, LACP, IGMP, SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Support EtherNet/IP and Modbus TCP protocols that facilitates the remote management by SCADA and other industrial devices
- Proprietary redundancy RING and redundancy CHAIN high-end redundancy technology adopts easy-to-build multiple ring topology, with self-healing recovery time <30 ms to ensure reliable network transmission</li>
- Enhanced network security with IEEE 802.1X, TACACS+, SSH, HTTPS and SNMP v3
- IEEE 1588v2 PTP (Precision Time Protocol) for precise time synchronization of network
- Loopback-detection to avoid broadcast storms by automatically shutting down the ports over a switching loop
- Cable diagnostic to auto-detect and report potential cabling issues
- Auto warning by emails, relay, Syslog & SNMP trap
- Compatible with various industrial protocols, including EtherNet/IP, Profinet, CC-LINK IE and DNP 3.0
- 100 ~ 240 VAC and 125 ~ 370 VDC wide range redundant power input
- IP30 metal case: -40°C~85°C operating temperature
- Electrical substation: IEC 61850-3, IEEE 1613
- Rail traffic: EN 50121-4
- Certifications: UL 61010, IEC 60950-1, CE, FCC, CCC and RCM

#### **Modules**

#### **DVS-G900-8GE** 8 10/100/1000Base-T RJ45



**DVS-G900-8GF** 8 100/1000Base-SFP



**DVS-G900-6GM12** 6 10/100/1000Base-T M12



**DVS-G900-4GF** 4 100/1000Base-SFP



# **Managed Switch**

DVS-328 New

- 24-Port FE + 4-Port GbE Combo SFP, designed for backbone network transmission at control centers
- Complete L2 network management functions: Q-in-Q VLAN, QoS, LACP, IGMP & SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Support Modbus TCP and EtherNet/IP protocols that facilitate remote management by SCADA and other industrial devices
- Proprietary ONE RING and ONE CHAIN high-end redundancy technology adopts easy-to-build multiple ring topology, with self-healing recovery time <20 ms to ensure reliable network transmission</li>
- Enhanced network security with IEEE 802.1X, TACACS+, SSH, HTTPS and SNMP v3
- · Loopback-detection to avoid broadcast storms by automatically shutting down the ports over a switching loop
- · Cable diagnostic to automatically detect twisted-pair cable quality and periodically report issues
- Auto warning by emails, DI, relay, syslog & SNMP trap
- Compatible with various industrial protocols, including EtherNet/IP, Profinet, CC-LINK IE and DNP 3.0
- $85 \sim 264 \, V_{AC}$  and  $88 \sim 370 \, V_{DC}$  wide range redundant power input
- IP40 metal case: -40°C ~ 70°C operating temperature
- Certifications: UL 60950-1, IEC 60950-1, CCC, CE, FCC and RCM

## DVS-110

- 7-Port FE + 3-Port GbE Combo SFP, designed for backbone networks
- Complete L2 network management functions: VLAN, QoS, LACP, IGMP & SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Support Modbus TCP and EtherNet/IP protocols that facilitate remote management by SCADA and other industrial devices
- Proprietary ONE RING and ONE CHAIN high-end redundancy technology adopts easy-tobuild multiple ring topology, with self-healing recovery time <20 ms to ensure reliable network transmission
- Loopback-detection to avoid broadcast storms by automatically shutting down the ports over a switching loop
- DDM diagnosis function by SFP fiber module
- Auto warning by emails, DI, relay, syslog & SNMP trap
- IP40 metal case: -40°C~75°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC and RCM











# **Managed Switch**

## **DVS-109**

- 8-Port FE + 1-Port GbE, Gigabit uplink port elevating transmission bandwidth
- Complete L2 network management functions: VLAN, QoS, LACP, IGMP & SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Support Modbus TCP and EtherNet/IP protocols that facilitate remote management by SCADA and other industrial devices
- Proprietary ONE RING and ONE CHAIN high-end redundancy technology adopts easy-to-build multiple ring topology, with self-healing recovery time <20 ms to ensure reliable network transmission</li>
- Loopback-detection to avoid broadcast storms by automatically shutting down the ports over a switching loop
- · Auto warning by emails, DI, relay, syslog & SNMP trap
- IP40 metal case: -40°C~75°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC and RCM

### **DVS-108**

- 6-Port FE + 2-Port GbE Combo SFP, designed for backbone network
- Complete L2 network management functions: VLAN, QoS, LACP, IGMP & SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Support Modbus TCP and EtherNet/IP protocols that facilitate remote management by SCADA and other industrial devices
- Proprietary ONE RING and ONE CHAIN high-end redundancy technology adopts easy-to-build multiple ring topology, with self-healing recovery time <20 ms to ensure reliable network transmission</li>
- Loopback-detection to avoid broadcast storms by automatically shutting down the ports over a switching loop
- · DDM diagnosis function by SFP fiber module
- · Auto warning by emails, DI, relay, syslog & SNMP trap
- IP40 metal case: -40°C~75°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC and RCM

# PoE+ Managed Switch

#### **DVS-G512**

- 8-Port GbE + 4-Port 100/1000Base-SFP, full Gigabit
- 8 10/100/1000Base-T PoE (PSE) ports, each provides 30 W power supply to meet IEEE 802.3at and IEEE 802.3af standards
- Complete L2 network management functions: VLAN, QoS, LACP, IGMP & SNMP v1/v2c/v3
- IPv6 address suitable for larger network and neighbor discovery
- Advanced PoE management and intelligent powered device(PD) class detection
- IEC 62439-2 MRP media redundancy protocol; IEEE 1588v2 PTP precision time protocol
- DDM diagnosis function by SFP fiber module
- Auto warning by emails, relay, syslog & SNMP trap
- IP30 metal case: -40°C ~ 70°C operating temperature
- Certifications: CE, FCC and RCM















# **Unmanaged Switch**

# DVS-G005100A

- 5-Port GbE
- Support IEEE 802.1p based QoS for packet forwarding precedence
- Built-in Broadcast Storm Protection
- · Transparent transmission of VLAN tagged packets
- Jumbo packet transmission: up to 9,216 Bytes
- EEE Green Ethernet for power savings
- IP40 metal case: -10°C~60°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC and RCM

## DVS-005/008/016

- 5/8/16-Port FE; supports long distance transmission via fiber optics
- Support IEEE 802.1p based QoS for packet forwarding precedence
- Built-in Broadcast Storm Protection
- Transparent transmission of VLAN tagged packets
- · Auto warning by relay output for link-down and power failure
- 12~48 V<sub>DC</sub> redundant terminal block power input
- IP40 metal case: -40°C~75°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC and RCM

### DVS-G005100C

- 5-Port GbE
- Jumbo frame size up to 10K Bytes
- 12 ~ 48 VDC redundant terminal block power input
- IP40 PC case: -20°C ~70°C operating temperature
- Certifications: UL 61010, IEC 62368-1, CE, FCC and RCM

# PoE+ Unmanaged Switch

### DVS-G408W01

- · 8-Port GbE, full Gigabit
- 8 10/100/1000Base-T PoE (PSE) ports, each provides 30 W power supply to meet IEEE 802.3at and IEEE 802.3af standards
- Jumbo packet transmission: up to 9,216 bytes
- · Auto warning by relay output for power failure
- IP30 metal case: -40 °C ~ 70 °C operating temperature
- · Certifications: CE, FCC and RCM











### DVS-G406W01-2GF

- 4-Port GbE + 2-Port 100/1000Base-SFP, full Gigabit
- 4 10/100/1000Base-T PoE (PSE) ports, each provides 30 W power supply to meet IEEE 802.3at and IEEE 802.3af standards
- Jumbo packet transmission: up to 9,216 Bytes
- · Auto warning by relay output for power failure
- IP30 metal case: -40°C~70°C operating temperature
- Certifications: CE, FCC and RCM



## Ethernet-to-Fiber Media Converter

## DVS-G002100-TF

- 1-Port 100/1000Base-T to 100/1000Base-SFP
- Jumbo frame size up to 10K bytes
- Supports Link fault Pass-Through(LFP)
- 12 ~ 48 VDC redundant terminal block power input
- IP40 PC case: -20°C~70°C operating temperature
- · Certifications: UL 61010, IEC 62368-1, CE, FCC and RCM



# SFP Fiber Transceiver

## LCP-GbE

- 1-Port GbE, compliant with IEEE 802.3z
- Full duplex operation
- DDM diagnosis function to monitor transmission quality
- · Hot-plugging duplex LC connectors for maximum flexibility
- Metal case: -40°C~85°C operating temperature

### LCP-1FE

- 1-Port FE, compliant with IEEE 802.3u
- Full duplex operation
- · DDM diagnosis function to monitor transmission quality
- Hot-plugging duplex LC connectors for maximum flexibility
- Metal case: -40°C ~85°C operating temperature





# PoE+ Splitter

## **DVS-G401**

- 1-Port GbE for PoE+ data / power input and 1-Port GbE for data output
- Provide 30W power supply / per port to meet IEEE 802.3at and IEEE 802.3af standards
- · Intelligent PoE input overvoltage protection
- Power output up to 27 W
- IP30 metal case: -20°C ~ 70°C operating temperature
- Certifications: CE, FCC and RCM



# PoE + Injector

## DVS-G402

- 2-Port GbE for PoE+ data / power output and 2-Port GbE for data input
- Provide 30 W power supply / per port to meet IEEE 802.3at and IEEE 802.3af standards
- Intelligent PoE output overvoltage protection
- Built-in 12 V<sub>DC</sub> power booster for flexible PoE deployment
- IP30 metal case: -20°C ~ 70°C operating temperature
- · Certifications: CE, FCC and RCM



## **IEEE 802.11 WLAN**

### DVW-W02W2-E2

- Complete transmission interface: 2-Port GbE + 2-Port RS-232/422/485
- Compliant with IEEE 802.11n wireless technology for up to 450 Mbps data transmission rate
- IEEE 802.11r fast roaming with seamless switch (< 50ms) among APs</li>
- Multiple wireless modes: AP, Client CPE, WDS P-T-P, WDS P-T-MP and repeater
- · Support serial device servers and MODBUS gateways
- · Wireless QoS (IEEE 802.11e, WMM) for video packet transmission precedence
- Enhanced wireless security: 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK (TKIP/AES) and 802.1X Authentication
- Support Modbus TCP protocol that facilitates the remote management by SCADA and other industrial devices
- Auto warning by emails, DI, relay, Syslog and SNMP trap
- IP40 metal case: -40°C~75°C operating temperature
- Certifications: UL 508, IEC 61131-2, CE, FCC, RCM, BSMI, SRRC and NCC





# High-gain Antenna

### **DVW-ANT**

- Support IEEE 802.11 b/g/n or IEEE 802.11 a/b/g/n
- 2.4 & 5 GHz dual-band omni-directional 5.5 & 8dBi, or 2.4 GHz omni-directional 7dBi
- · Powerful magnetic base with 3-meter extension cord and RP-SMA (male) connector
- IP65 waterproof and UV resistant design, suitable for applications under all kinds of weather conditions
- -30°C ~ 60°C operating temperature



## **Industrial 3G Cloud Router**

## DX-2100RW

- 1-Port FE + 1-Port RS-232 + 1-Port RS-485
- UMTS/HSPA+: 800/850, 900, AWS1700, 1900, 2100 MHz
- GSM/GPRS/EDGE: 850, 900, 1800, 1900 MHz
- · Support DIACloud Cloud Management Platform, no ISP public IP address required
- Support Modbus TCP and MODBUS ASCII/RTU protocols
- Firewalls: Stateful Packet Inspection (SPI), Denial of Service (DoS) attacks, NAT,
   Port triggering, Port mapping, IP address filtering, MAC address filtering, URL filtering
- IP30 metal case: -20°C~70°C operating temperature
- Certifications: CE, FCC and UL



# **Industrial Ethernet Cloud Router**

### DX-2300LN

- 4-Port FE LAN + 1-Port FE WAN + 1-Port RS-232 + 1-Port RS-485
- · Support DIACloud Cloud Management Platform, no ISP public IP address required
- Support Modbus TCP and MODBUS ASCII/RTU protocols
- Firewalls: Stateful Packet Inspection (SPI), Denial of Service (DoS) attacks, NAT,
   Port triggering, Port mapping, IP address filtering, MAC address filtering, URL filtering
- IP30 metal case: -20°C~70°C operating temperature
- · Certifications: CE, FCC and UL



# Industrial 3G/WAN Cloud Router

## DX-3001H9 New

- 4-Port FE LAN + 1-Port FE WAN + 1-Port RS-232 + 1-Port RS-485
- UMTS/HSPA+: 800 / 850, 900, AWS1700, 1900, 2100 MHz
- GSM/GPRS/EDGE: 850, 900, 1800, 1900 MHz
- · Support DIACloud Cloud Management Platform, no ISP public IP address required
- Support Modbus TCP, Modbus ASCII/RTU protocols
- Dual SIM redundancy design: seamless switch among ISP systems for continuous network connection
- IP30 metal case: -20°C ~ 70°C operating temperature
- Certifications: CE, FCC and UL



## Industrial 3G/WAN VPN Router

## DX-3001H9-V

- 4-Port FE LAN + 1-Port FE WAN + 1-Port RS-232 + 1-Port RS-485
- UMTS/HSPA+: 800/850, 900, AWS1700, 1900, 2100 MHz
- Support GSM/GPRS/EDGE: 850, 900, 1800, 1900 MHz
- Support IPSec, OpenVPN, PPTP, L2TP and GRE VPN protocols;
   IPSec with CA certificate supports L2TP over IPSec
- Dual SIM redundancy design: seamless switch among ISP systems for continuous network connection
- Built-in RTC
- Flexible connection method over WAN port, e.g. static IP, DHCP client and more
- Firewalls: Stateful Packet Inspection (SPI), Denial of Service (DoS) attacks, NAT, port triggering, port mapping, IP address filtering, MAC address filtering, URL filtering
- IP30 metal case: -20°C ~ 70°C operating temperature
- · Certifications: CE, FCC and UL







# **Communication Module**

**High Speed and Stable Industrial Network Solutions** 

# BACnet MS/TP Slave Module

DVPSCM52-SL

- BACnet MS/TP slave, standard Modbus and user-defined RS-422/485 communication protocols
- Compatible with software and DDC of major brands on the market; remote I/O and converter function available when connected with a PLC with I/O point extension
- Isolated power and communication provide strong noise immunity. Built-in 120 ohm terminal resistor switch and feed-through terminals with spring plugs
- Data transmission settings via software, no complex programming required



# RS-422/485 Master Module

DVPSCM12-SI

- Standard Modbus communication and user-defined RS-422/485 communication protocols
- Two sets of independent RS-422/485 communication interfaces
- Isolated power and communication provide strong noise immunity; built-in 120 ohm terminal resistor switch and feed-through terminals with spring plugs
- Data transmission settings via software, no complex programming required
- Applied as PLC communication ports for program uploading/downloading and monitoring



# Ethernet Master Module

**DVPEN01-SL** 

- Modbus TCP protocol
- Modbus TCP connections: Client: 32 Server: 16
- Smart data exchange
- RTU mapping
- Simple firewall
- Email alarm



# CANopen Master Module

**DVPCOPM-SL** 

- CANopen protocol
- Able to connect max. 110 slaves
- Various PDO and high-speed SDO transmission
- Supports NMT slave, Heartbeat, Emergency and more protocols



# PROFIBUS DP Slave Module

DVPPF02-SI

- PROFIBUS DP slave protocol
- Supports GSD files identification and cyclic data transmission
- Data transmission: up to 100 words IN/OUT data mapping



# DeviceNet Master Module

DVPDNET-SI

- DeviceNet protocol
- Able to connect max. 63 slaves
- Supports EDS files identification and cyclic data transmission
- Max. network connection distance: 500 m
- RTU mapping



# Ethernet Remote I/O Communication Module

### RTU-EN01

- · Modbus TCP slave protocol
- · Able to connect 8 DVP-S Series analog I/O modules
- · Able to connect digital I/O (256 points) modules
- RS-485 port supports max. 32 MODBUS slaves
- Smart PLC if-then function
- Smart monitor function
- Supports webpage setup and on-line monitoring
- · Serial virtual COM available



# PROFIBUS DP Remote I/O Communication Module

### RTU-PD01

- PROFIBUS DP slave protocol
- · Auto-detects baudrate, max. baudrate: 12 Mbps
- Supports GSD files for identification and cyclic data transmission
- · Able to connect 8 DVP-S Series analog I/O modules
- Able to connect digital I/O (256 points)
- RS-485 port supports max. 16 Modbus slaves



# DeviceNet Remote I/O Communication Module

### RTU-DNET

- DeviceNet protocol
- Supports EDS files for identification and cyclic data transmission
- Able to connect 8 DVP-S Series analog I/O modules
- Able to connect digital I/O (256 points)
- RS-485 port supports max. 8 Modbus slaves



# RS-485 Remote I/O Communication Module

### RTU-485

- Modbus protocol
- Able to connect 8 DVP-S Series analog I/O modules
- Able to connect digital I/O (256 points) modules
- Max. baud rate: 115.2Kbps



## **DVP Series Slave Module (Right-side)**

DVPCP02-H2	DVPPF01-S	DVPPF02-H2	DVPDT01-S	DVPDT02-H2
CANopen slave module Supports DVP-EH2/3 Series	PROFIBUS slave module Supports DVP-S Series	PROFIBUS slave module Supports DVP-EH2/3 Series	DeviceNet slave module Supports DVP-S Series	DeviceNet slave module Supports DVP-EH2/3 Series



## Converter

Impedance to Noise with a Range of Fieldbus Converters



### **Applications**

Intelligent transportation systems, water treatment, building automation, factory automation, monitoring and control systems

### **USB** Converter

O3B COIII				
	UC-PRG020-12A USB » RS-232	<ul> <li>Delta programming cables</li> <li>RS-232 port provides mini-DIN and DB9 connectors</li> <li>A portable hot-plugging USB device, no power supply required</li> </ul>		
	IFD6500 USB » RS-485 IFD6503	<ul> <li>Lightweight design for easy portability</li> <li>Auto-detection of data flow direction</li> <li>A portable USB device</li> <li>Supports Win XP, Win7 32/64-bit</li> <li>Extracts CAN messages (incl. standard and extended frames), decodes and displays following DeviceNet and CANopen protocols</li> <li>Filters by set conditions</li> </ul>		
	USB » CAN	<ul> <li>Sends CAN messages (1 message by manual mode, 8 messages by auto mode)</li> <li>Max. 1 Mbps</li> <li>A portable USB device</li> </ul>		
	IFD6530 USB » RS-485	<ul> <li>Lightweight design for easy portability</li> <li>Auto-detection of data flow direction</li> <li>Supports KPC-CC01keypad in conducting parameters and page editing</li> <li>Supports Win XP, Win7 32/64-bit</li> <li>A portable USB device</li> </ul>		

### **Modbus Serial Converter**



## IFD8500A

RS-232 « » RS-485

- RS-232 to RS-422 / 485 isolated converter
- Auto transmission speed adjustment

### IFD8510A

RS-422/485

- RS-422 / 485 isolated regenerator
- RS-422 / 485 transmission distance extended to 1.2 km
- Able to connect to 32 RS-485 devices
- Auto transmission speed adjustment and data flow direction control

## IFD8520

RS-232 « » RS-485

- RS-232 to RS-422/485 addressable isolated converter
- Connects RS-232 to RS-422/485 by setting up Modbus address

### Industrial Network Converter

	M	1	700
0	0	100	V
	1		0

### IFD9502

**DeviceNet** » **MODBUS** 

- DeviceNet protocol
- Able to connect Delta industrial automation products
- Isolation in RS-485 channel (incl. power supply)
- Full compatibility test passed

### IFD9503

**CANopen** » **MODBUS** 

- CANopen protocol
- Able to connect all Delta industrial automation products
- Isolation in RS-485 channel (incl. power supply)
- · Full compatibility test passed
- IFD9506

**MODBUS TCP** « » MODBUS


- Isolation in RS-485 channel (incl. power supply)
- Modbus TCP protocol
- Smart monitor function
- Supports webpage setup and on-line monitoring
- Serial virtual COM available
- Alarm notification through email
- IFD9507


EtherNet/IP «» **MODBUS** 

- Isolation in RS-485 channel (incl. power supply)
- EtherNet/IP and Modbus TCP protocols
- Smart monitor function
- Supports webpage setup and on-line monitoring
- Serial virtual COM available
- Alarm notification through email



## **Industrial Automation Solutions**

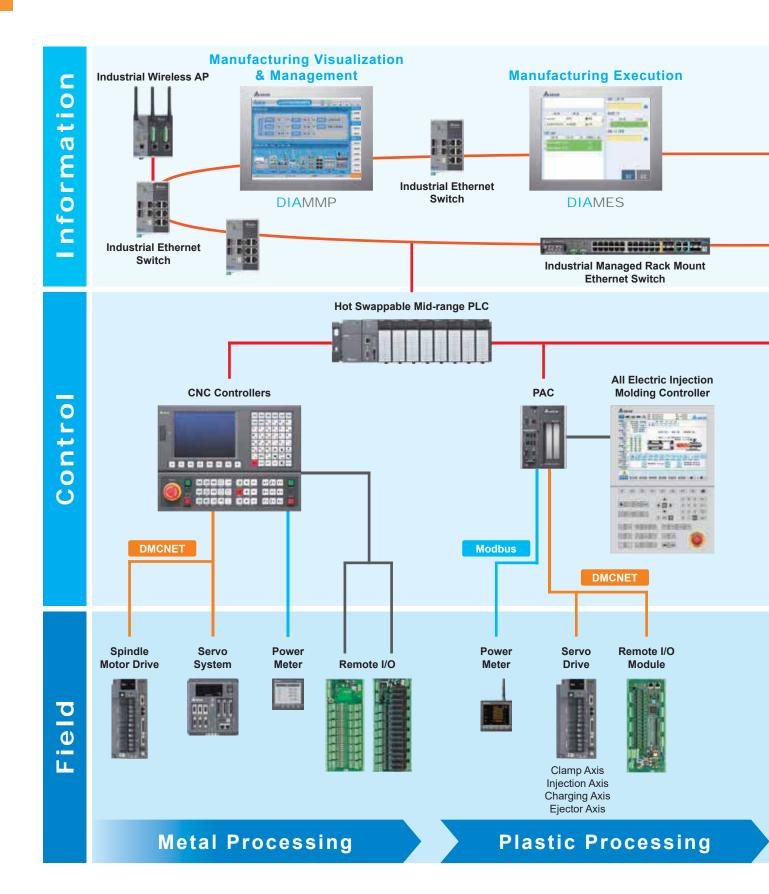

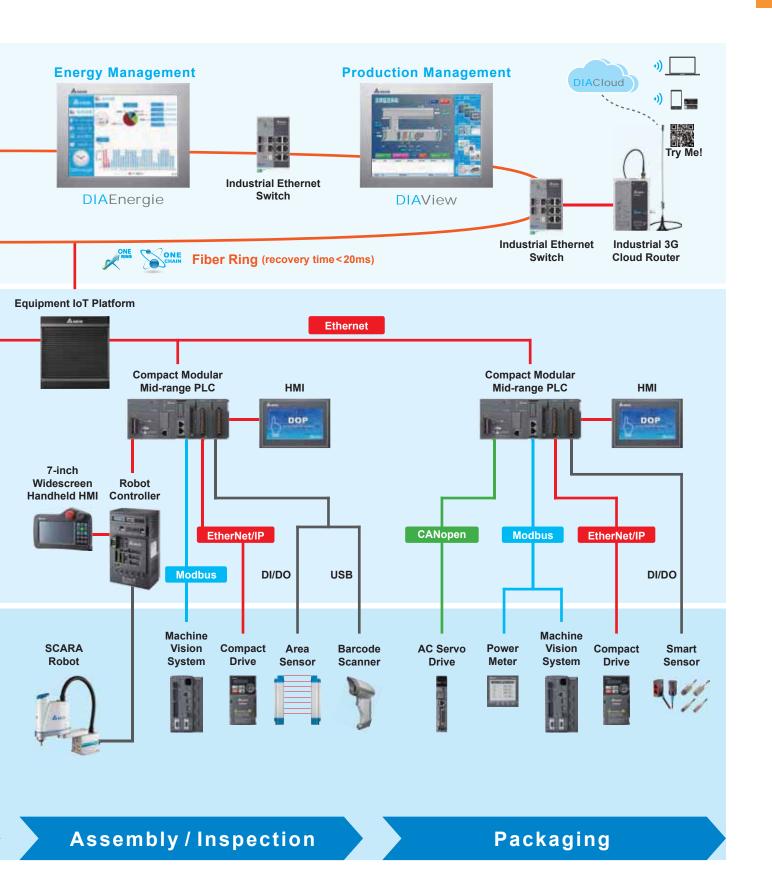



## **Industrial PC**

DIAV


### Stable and High-performance Integration Platform

- IPC with 10"/12"/15"/17"/19" TFT LCD touch screen
- Wide operating temperature range, suitable for applications in harsh industrial environments
- Fanless and low power Intel Core i3/i5 and Celeron J1900 processor with high efficiency and excellent performance
- One-click start up click (power-on)
- Embedded Windows 7 operating system with 128G/256G/512G SSD
- · Full compatibility with SCADA and IEMS software platform



SCADA System (SCADA)

DIAVH-IPC DIAVH-PPC15 DIAVH-PPC19

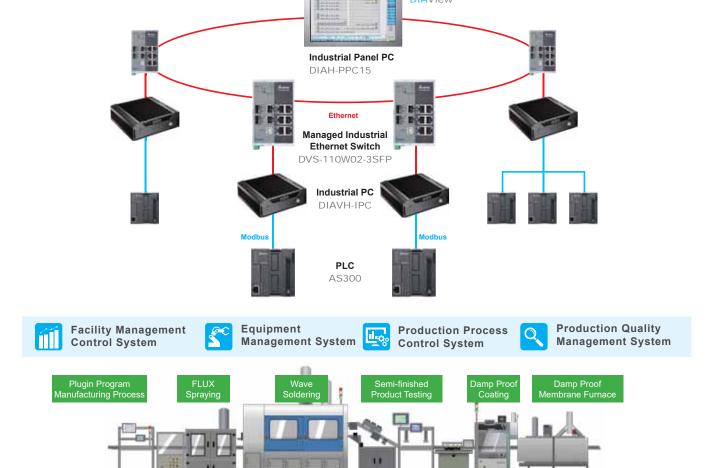


### **Applications**


Equipment for electronics manufacturing, machinery equipment, HVAC, water treatment, facility management and monitoring control

### **Factory Digitalization**

- Factory data acquisition, process control and management
- Distributed system calculation for data and information storage and analytics



**Factory Digitalization** 



**Factory Equipment Monitoring** 

# **Inspection & Monitoring of Electronic Equipment**

- DIAView interacts with the programming processes of PLCs and inspection equipment, realizing powerful group control
- With DIAView, the system can record daily production, identify qualified and unqualified products, and provide inquiry functions



**Electronic Inspection Equipment** 



Inspection and Monitoring of Electronic Equipment

# **Logistic Application: Transportation and Stereoscopic Warehouse**

 The database saves the location of materials; barcode scanning enhances load/unload and sorting efficiency to save space and labor costs




Warehousing System



**Warehouse Monitoring** 

### **Equipment Monitoring System**

- Achieves real-time remote monitoring of machine operating status
- Allows device suppliers to remotely lock/unlock devices for flexible management



**Total Configuration of Equipment Monitoring** 




**Equipment Remote Monitoring** 



## **Equipment IoT Platform**

### **DIALink**

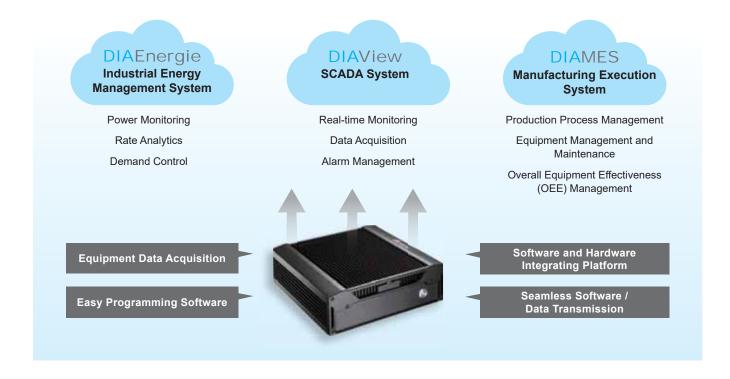

### **Equipment Monitoring and Data Acquisition**

#### **Features**


- Supports all major CNC and PLC drivers
- Equipment monitoring and data acquisition
- · Data temporary storage function

### **Benefits**

- Equipment data digitalization and management
- Customized (user-defined) real-time information visualization
- · Machine abnormality and idle time monitoring
- Enhanced efficiency by improving control of Overall Equipment Effectiveness (OEE)


### **Applications**

- Real-time equipment data collection
- · Equipment analysis and management
- · Remote monitoring and control

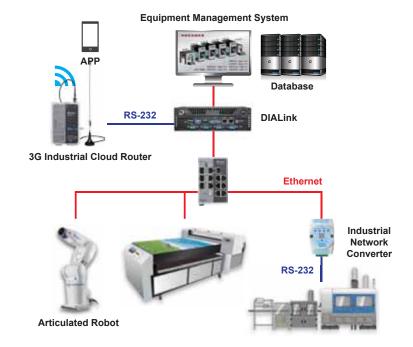


## **Rapid, Seamless and Secure Data Transfer**

- Supports OPC Server
- Supports Modbus slaves, XML, JSON data formats
- Open Web API

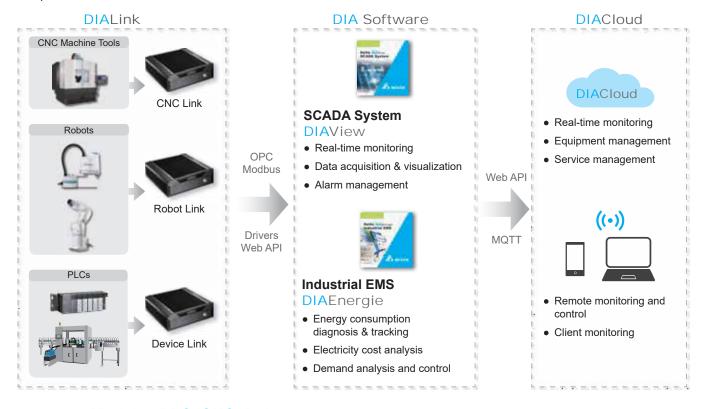

### DIALink Models - PLC/CNC/Robot

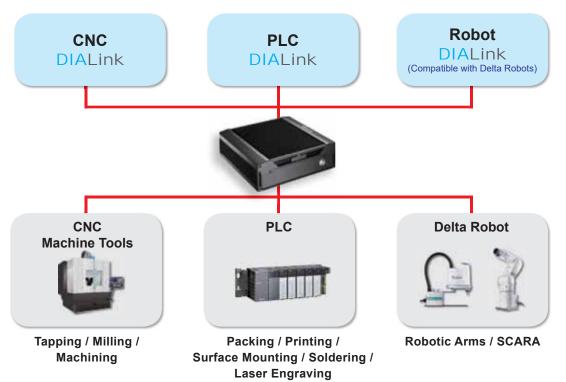




## **SCADA System**

### **DIAView**

# **Evolution of Factory Visualization and Analysis Management**

- Seamless integration with Delta's PLC products and I/O modules, supporting various industrial communication protocols and equipment drivers
- WPF technology for intuitive and vivid displays, and easy-to-navigate interfaces
- Flexible variables dictionary and batch editing parameters
- · A variety of data visualization tools: reports, alarms, charts and trend graphs
- Diversified real-time and historical data analysis tools
- · Strong and efficient alarm management
- Easy-to-learn VBScript language
- Reliable user authority management for different user levels

### **System Structure and Applications**

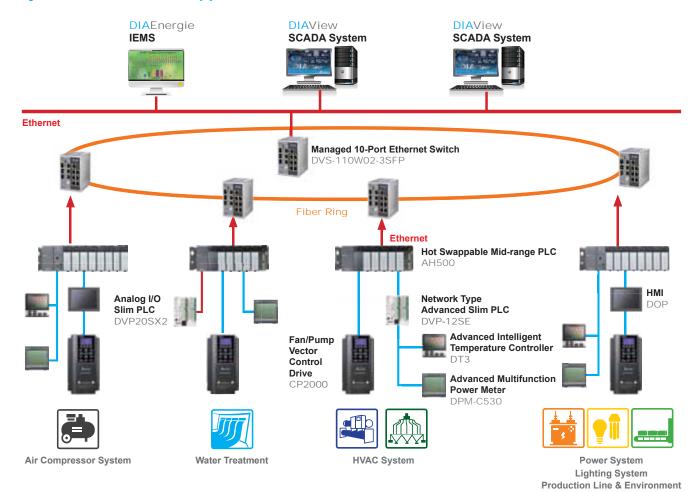

### **Applications**

HVAC, water treatment, central heating, electronics manufacturing


Industrial Energy Management System

**DIA**Energie

### **Innovative Solution for Smart Energy Saving**

- Visualization and remote monitoring of critical power consumption
- Data analysis by areas and user levels
- Monitoring and analysis to meet energy performance strategy
- · Instant record and alarm delivery for abnormal machine actions
- Power consumption measurement and analysis to achieve more efficient electricity usage and electricity cost savings
- Demand management and forecast to avoid over-limit demand penalties
- · Customized user-defined reporting tools for displaying a variety of data analysis

### **System Structure and Applications**

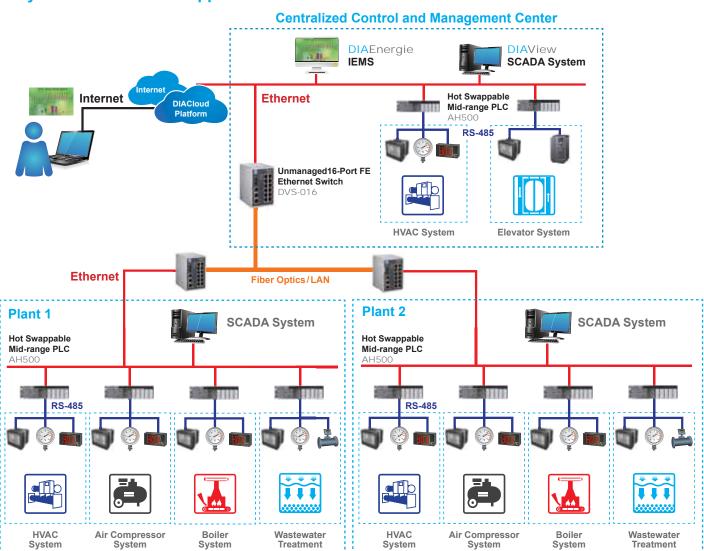



## **Delta Articulated Robot**


## DRV70L/DRV90L

## **New Intelligent Industrial Automation Trend**

- · High precision, high speed
- Built-in 3 solenoid valves for quick integration and application
- Hollow design of the robot wrist (the 6<sup>th</sup> axis) for wiring and tool placement
- Slim and compact body design
  - Overall width: Max. 235 mm
  - Footprint: 190 x 190 mm
- · High integration and efficiency
  - Match with key devices for production automation
  - Quick integration with peripheral components for workstation applications



DRV70L DRV90L

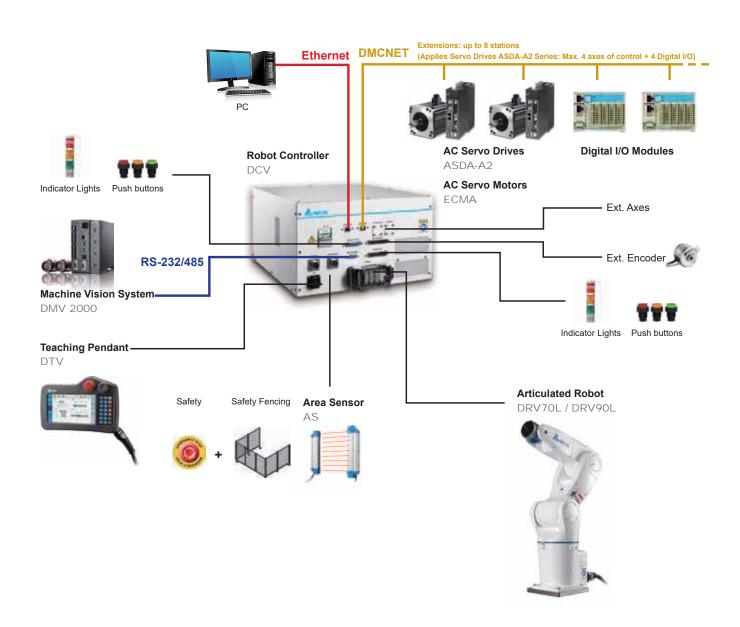

Product Specifications						
Model		DRV70L	DRV90L			
Number of Axes		6				
Max. Working Range		710 mm	900 mm			
Max. Payload		7kg				
	J1	±170° (450° sec)	±170° (370° sec)			
	J2	+133° / -105° (340° sec)	+135° / -105° (260° sec)			
Motion Range (Max. Speed)	J3	+65° / -205° (510° sec)	+65° / -205° (410° sec)			
Wolfor Range (Wax. Speed)	J4	±190° (550° sec)				
	J5	±120° (550° sec)				
	J6	±360° (820° sec)				
Repeatability		±0.02 mm	±0.03 mm			
Standard Cycle Time*1		0.32 sec	0.35 sec			
Installation		Desk-mount / Wall-mount / Ceiling-mount				
Built-in Wires		One 12Pos. connector for sensor connections and two ø6 pneumatic tubings (one is for three built-in solenoids, the other is for extension purpose)				
IP rating <sup>*2</sup>		IP40 (Standard) / IP65 (Optional)				
	Temperature	0°C ~ 40°C				
Environment	Humidity	20 ~ 85%RH				
	Vibration	0.5 G				
Weight		37kg	39kg			
Controller Series		Robot Controller DCV Series				

<sup>\*1.</sup> When carrying a payload of 1 kg and reciprocating 25 mm in vertical and 300 mm in horizontal directions under an operating temperature of 25 °C and within a humidity of 45% ~ 65% RH (non-condensing)

### • High Flexibility/Multiple Installations

- Max. working range: 710mm 900mm enhances manufacturing flexibility
- Desk-mount / wall-mount / ceiling-mount installation fulfills various application needs



### • Hollow-wrist Design

### No Hollow Design Tangled wire / cords lead to equipment interference



### Hollow Design Enhance reliability of extension wire / cords



### • Simple and User-Friendly Operation Interface



## DRAStudio Robotic Automation Studio software system



#### Intuitive user interface

- Real-time equipment data
- Dynamic-link library
- Self-defined user IO
- Optimized parameters
- Complete tuning function
- Easy backup with one click

### Simple and graphic programming

### **Applications**







Load/Unload Ma

**Machine Tending** 

Assembly







Insertion

Inspection

Screw-driving



<sup>\*2.</sup> Please contact regional sales when environment situations are not within the above specifications

## **SCARA Robot**

DRS40L/DRS50L/DRS60L/DRS60H M/DRS70L

High Repeatability, High Precision, Excellent Linearity and Verticality









Robot Controller DCS

Product Specifications									
Model		DRS30L3	DRS40L3	DRS50L6	DRS60L6	DRS70L6	DRS60L3 (5-Axis)	DRS60L3	DRS60H6
Installation		Desk-mount	Desk-mount	Desk-mount	Desk-mount	Desk-mount	Desk-mount	Desk-mount	Desk-mount
Arm Length ( X+Y )		300 mm	400 mm	500mm	600 mm	700mm	600 mm	600 mm	600 mm
Max. Payload		3 Kg	3 Kg	6 Kg	6 Kg	6 Kg	3 Kg	3 Kg	6 Kg
	J1	±130°	±130°	±133°	±133°	±133°	±133°	±114°	±130°
	J2	±146.6°	±146.6°	±153°	±153°	±153°	±153°	±148°	±150°
Motion Range	J3	150 mm	150 mm	200 mm	200 mm	200 mm	200 mm	150 mm	200 mm
	J4	±360°	±360°	±360°	±360°	±360°	±360°	±360°	±360°
	J5	N.A.	N.A.	N.A.	N.A.	N.A.	±360°	N.A.	N.A.
Standard Cycle	Time*	-	0.42 sec	0.39 sec	0.39 sec	0.40 sec	0.45 sec	0.72 sec	0.39 sec
	J1+J2	±0.01 mm	±0.01 mm	±0.015 mm	±0.015 mm	±0.015 mm	±0.015 mm	±0.015 mm	±0.015 mm
Donastability	J3	±0.01 mm	±0.01 mm	±0.01 mm					
Repeatability	J4	±0.01°	±0.01°	±0.01°	±0.01°	±0.01°	±0.01°	±0.01°	±0.01°
	J5			N.A.	N.A.	N.A.	±0.01°	N.A.	N.A.

<sup>\*</sup> When carrying a payload of 1 kg and reciprocating 25mm in vertical and 300mm in horizontal directions under an operating temperature of 25°C and within a humidity of 45% ~ 65% RH (non-condensing)

### **Applications**

Industries: Electrical/electronics, consumer electronics, rubber and plastic, metal fabrication, food and beverages Processes: Loading/unloading, pick-and-place, assembly, packaging, insertion, dispensing, soldering, inspection and screw driving

### **SCARA Robot Applications**













Loading/Unloading

Insertion

Glue Dispensing


**Product Inspection** 

Screw Driving

Soldering

### • Sensor-less Compliance Control Function

- Compensates for the deviation between workpieces and insertion holes
- Fast and precise smooth insertion
- Improves assembly and production performance



 Insertion performance may differ depending on workpiece hardness

### Intuitive Teaching Methods with Versatile Control Approaches





Positions are directly taught and controlled by hand, and recorded by SCARA.



#### Off-line Simulation Function


- Robotic integration software with simulation modules
- Fast programming
- Shortens development time
- Pre-evaluation, saves cost
- Simple and easy-to-operate

### Arch Motion Control

- Route optimization
- Saves motion time
- Quick and easy setting
- Optimizes arch route setting, fast operational speed

 Prevents crash when near the top or edge of robot route planning





### Real-time Information Monitoring and Gathering

- Robot machine data monitoring and analysis
- Oversees real-time machine operation data
- On-site production information acquisition



**Equipment Data Acquisition Platform**DIALink



Overall Equipment
Effectiveness Platform

### Optimizes Operational Efficiency

- Safe operation, improves operational stability
- Excellent dynamic display for operational efficiency and intelligent control
- Smart temperature control, real-time control of working environment



**Normal Mode** 

**Adjustment Mode** 

**Overload Mode** 



## **Global Operations**

### ASIA (Taiwan)



Taoyuan Technology Center (Green Building)



Taoyuan Plant 1



Tainan Plant (Diamond-rated Green Building)

### ASIA (China)



Wujiang Plant 3



Delta Electronics











**EUROPE** 




Tokyo Office

**Rudrapur Plant** (Green Building)

Amsterdam, Netherlands

Research Triangle Park

▲ Factories 5 📕 Branch Offices 102 💿 R&D Centers 6 🔳 Distributors 824

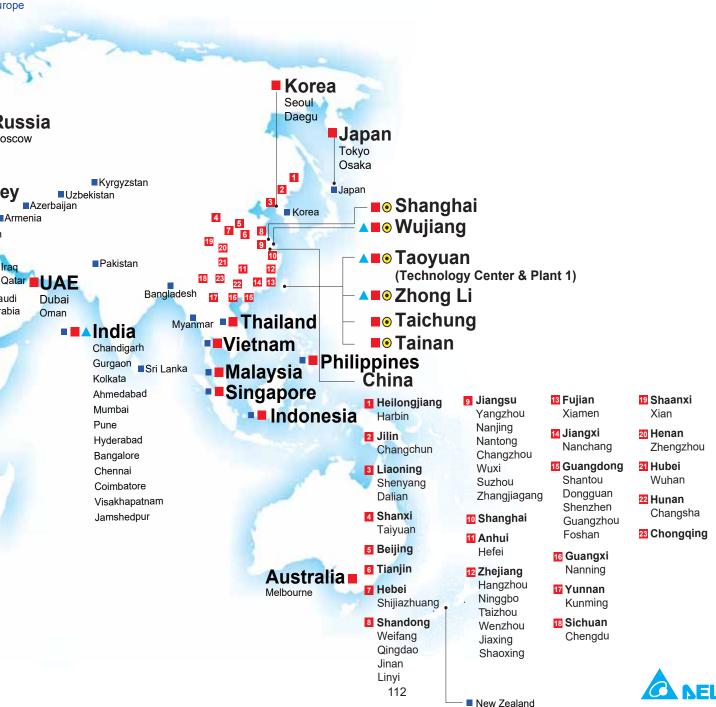



### **MEXICO BRANCH OFFICE**

Acments For Manufacturing Processes Roberto Diaz No. 401 Ciudad Industrial Aguascalientes, Ags. México 20290

4ManPro@4ManPro.com (449) 171 3420 www.4ManPro.com/SPA/



## USA BRANCH OFFICE 4ManPro®

708 Main St. 10<sup>th</sup> Floor Houston, Tx, USA 77002

4ManPro-USA@4ManPro.com +1 (832) 871 5022 www.4ManPro.com/ENG/

