





INTERRUPTORES DE PRESIÓN


HI HYDROME



PRESSURE SWITCH



USED CURRENT
AC 250V 3A

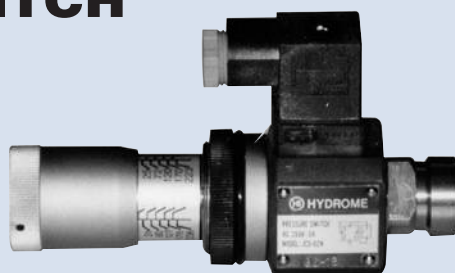

JCS-02N, 02NL, 02NLL



JPS-02HM, 02L, 02LL

H

How to order

JCS - 02 - N

1	2	3
1	Model	Body: Cast iron
2	Port size	PT1/4"
3	Pressure adjusting range	N: 30~230 bar NL: 5~60 bar NLL: 5~60 bar

JPS - 02 - HM


1	2	3
1	Model	Body: cast iron
2	Port size	PT1/4"
3	Pressure adjusting range	HM: 30~230 bar L: 15~60 bar LL: 5~60 bar

Specifications


Model	Pressure Adj. Range (bar)	Max. Pressure (bar)	Weight (kg)
JCS-02N	30~230	230	0.9
JCS-02NL	15~60	230	0.9
JCS-02NLL	5~60	230	0.9
JPS-02HM	30~230	230	1.45
JPS-02L	15~60	230	1.45
JPS-02LL	5~60	230	1.45

Dimensions

Unit: mm

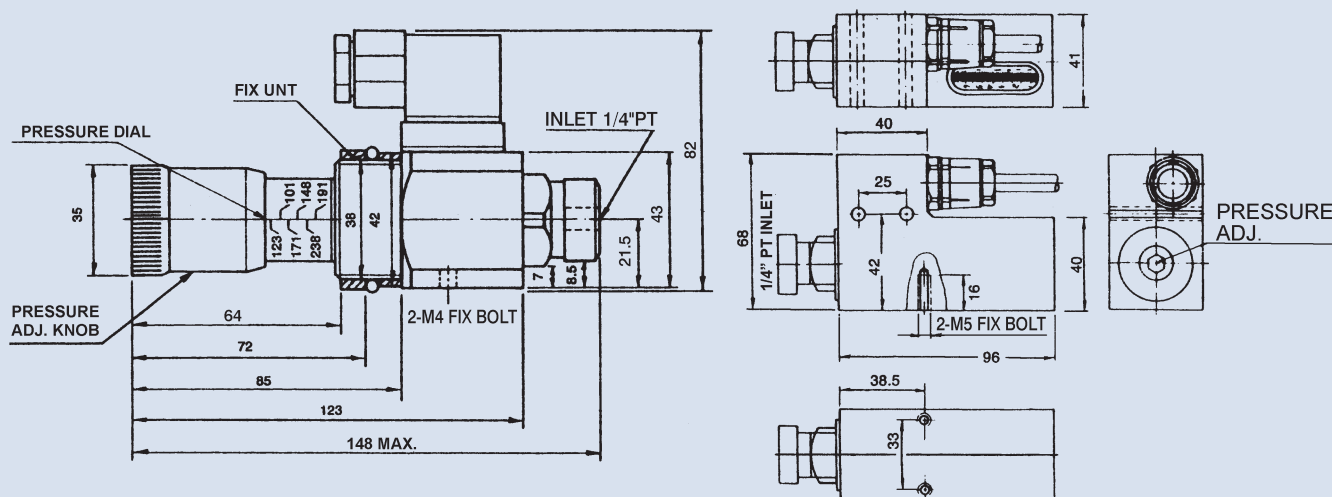

PRESSURE SWITCH



APSA



APSB



APSC



APSG



APSH

How to order

APSA,APSB,APSC - 230 - 1

	1	2	3
1	Model	Pipe connection type	Body: Aluminum alloy
2	Pressure adjusting range (bar)		
3	Port size	1: 1/4"PT 2: 1/4"NPT 3: 1/4"SAE 4: 1/4"BSP	

APSH,APSG - 60

	1	2
1	Model	Sub-plate mounting type Body: AL6061-T6
2	Pressure adjusting range (bar)	


Specifications

Model	Pressure Adj. Range (bar)		Max. Overpressure (bar)	Repetition Accuracy	Max. Voltage Current	Weight (kg)
APSA	35: 5~35	70: 10~70	600	±1%	250 VAC (3A) 30 VDC (4A)	0.75
APSB	150: 30~150	230: 50~230				0.67
APSC	420: 90~420					
APSG	60: 5~60	125: 10~125				0.6
APSH	275: 25~275	400: 30~400				0.57

Dimensions

APSB

Unit: mm

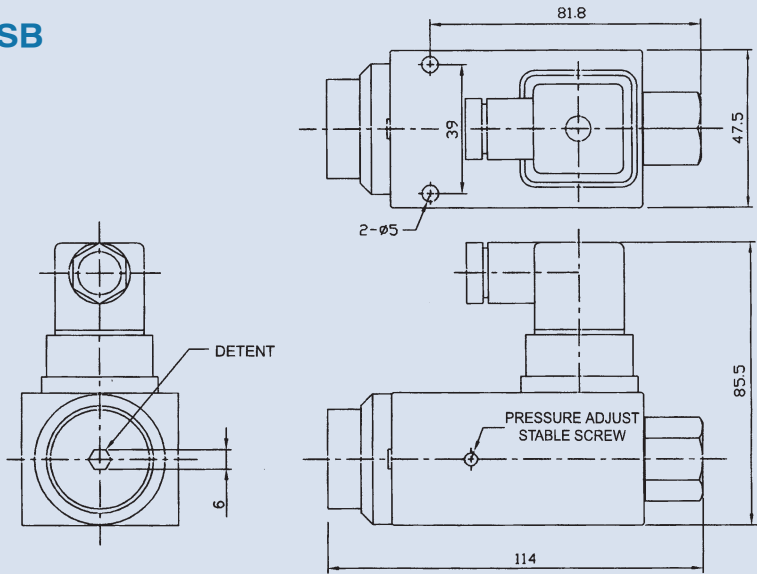


PRESSURE SWITCH


Dimensions

I

APSA

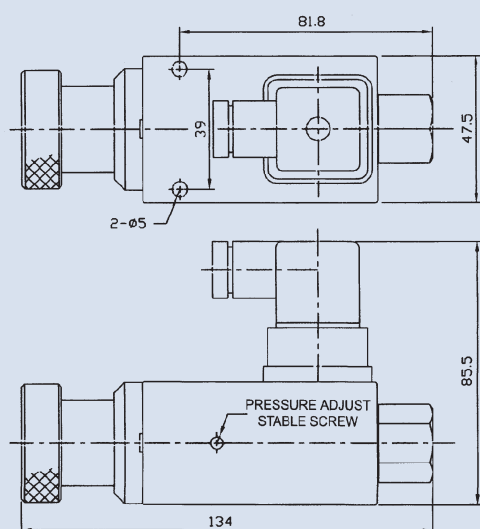


APSC

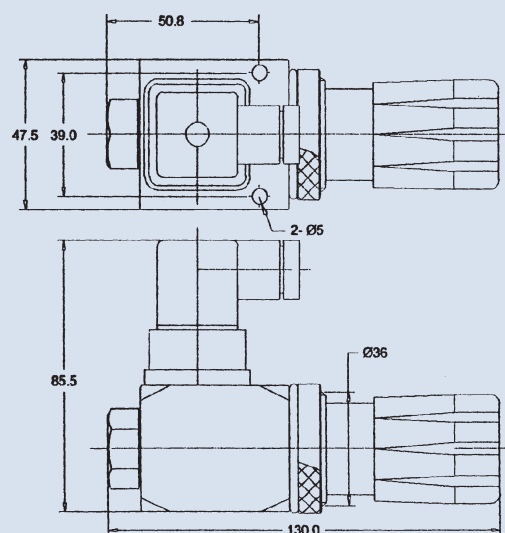


Unit: mm

APSG

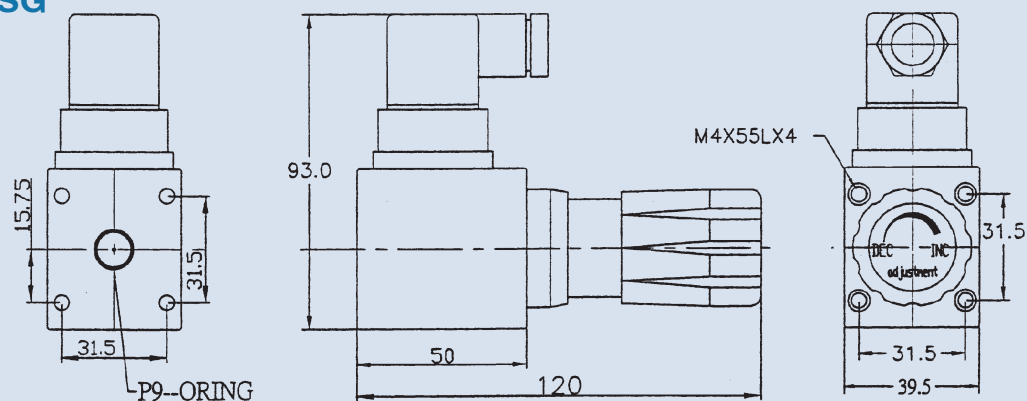


APSH

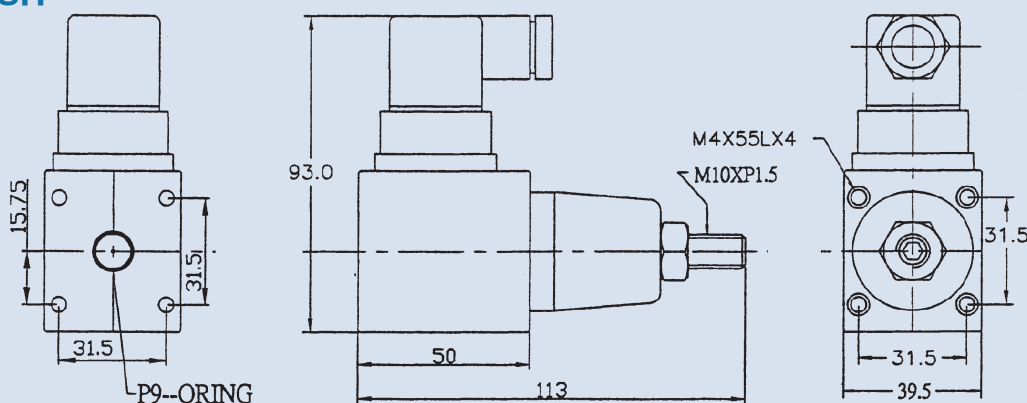


PRESSURE SWITCH

Performance curves


APSA, APSB-35

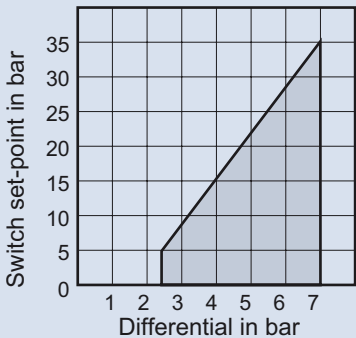


APSA, APSB-70




APSA, APSB-150

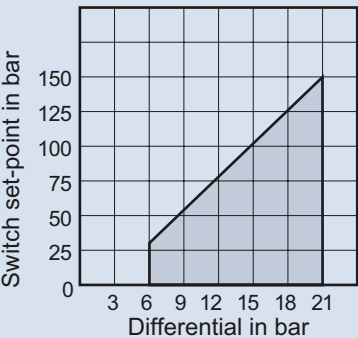


APSA, APSB-230

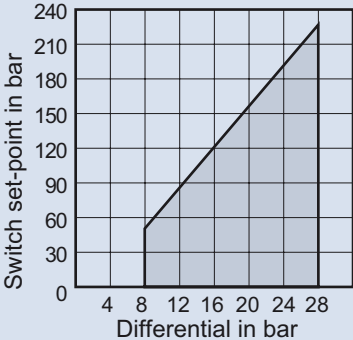


APSA, APSB-420




APSC, APSG, APSH-60

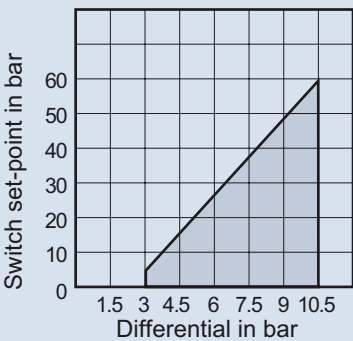


APSC, APSG, APSH-125




APSC, APSG, APSH-275

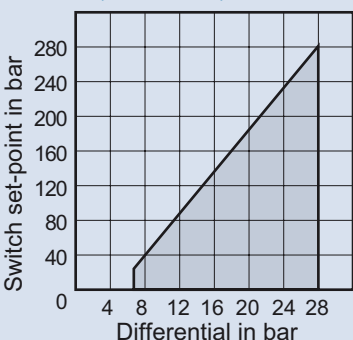

APSC-400



PRESSURE SWITCH



NO=Normally open
NC=Normally closed



DNF



DNA



DNB

I

How to order


DNF - 100 - 22B - 1

	1	2	3	4
1	Model	DNF: Panel mounting type	DNA: Standard type	DNB: Tool adjustment type
2	Pressure adjusting range (bar)			
3	22B: Without indicator led	06I: With indicator led		
4	Port size	1: 1/4"PT	2: 1/4"NPT	3: 1/4"PF (G)




Specifications

Model	Pressure Adj. Range (bar)		Max. Pressure (bar)		Max. Voltage Current (lpm)	Weight (kg)
DNF	40: 6~40	70: 10~70	40: 150	70: 150	22B: 250 VAC (3A)	1.2
DNA	100: 15~100	150: 20~150	100: 250	150: 250	30 VDC (2A)	1
DNB	250: 40~250	360: 50~360	250: 400	360: 400	06I: 250 VAC (<0.6A)	0.6
					24 VDC (<0.6A)	

Dimensions

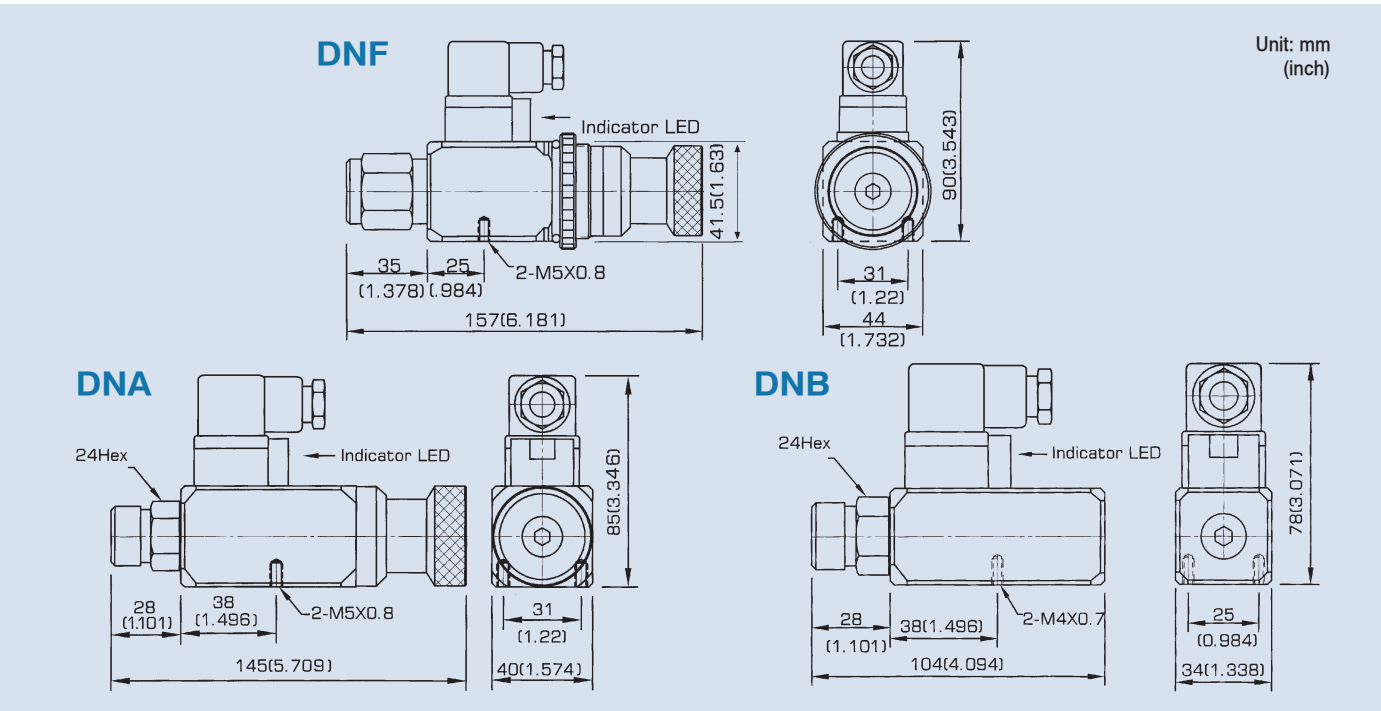

MODULAR PRESSURE SWITCH

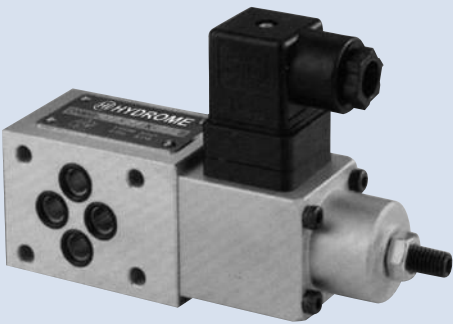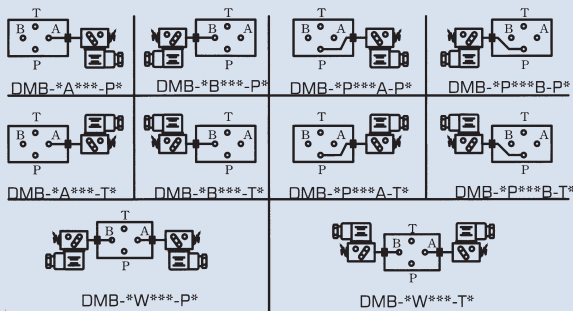

How to order



DMB - 02 P 250 A - P B

	1	2	3	4	5	6	7
1	Model DMB: Modular type						
2	For valve size 02: ISO CETOP 3, NFPA D03, DIN NG 6 03: ISO CETOP 5, NFPA D05, DIN NG 10						
3	Control port A: A port B: B port P: P port W: A and B ports						
4	Pressure adjusting range 40: 6~40 bar 70: 8~70 bar 150: 15~150 bar 250: 40~250 bar						
5	Position of the pressure adjustment						
6	Position of the electrical connector						
7	B: Without indicator led I: With indicator led						

Specifications

Model	Pressure Adj. Range (bar)		Max. Pressure (bar)		Max. Voltage Current (lpm)	Weight (kg)
DMB-02P (A,B)	40: 6~40	70: 8~70	40: 150	70: 150	B: 250 VAC (3A) 30 VDC (2A)	0.55
DMB-02W						0.80
DMB-03P (A,B)	150: 15~150	250: 40~250	150: 250	250: 400	I: 250 VAC (<0.6A) 24 VDC (<0.6A)	0.90
DMB-03W						1.5


Dimensions

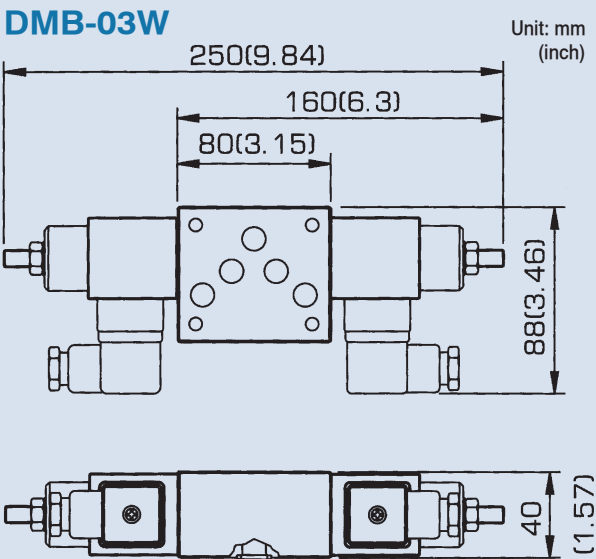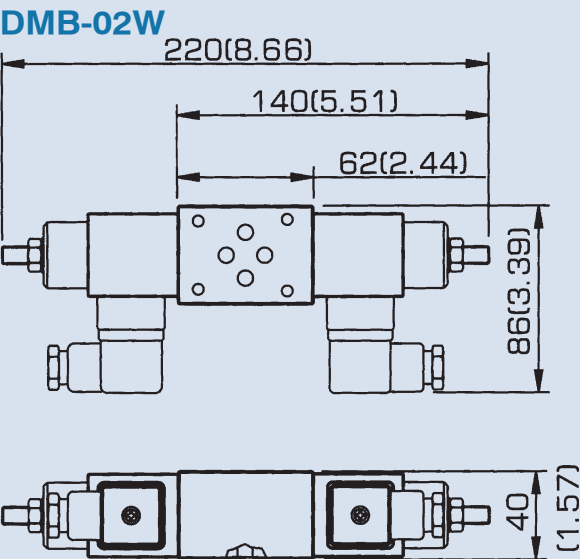

MINIATURE PRESSURE SWITCH



APSI



APSL



I

How to order


APSI, APSL - 250 - 1

- | | 1 | 2 | 3 |
|---|--------------------------------|----------------------|---|
| 1 | Model | Body: Aluminum alloy | |
| 2 | Pressure adjusting range (bar) | | |
| 3 | Port size | 1: 1/4"PT | |


Specifications

Model	Pressure Adj. Range (bar)		Max. Overpressure (bar)	Repetition Accuracy	Max. Voltage Current	Weight (kg)
APSI	70: 5~70 250: 25~250	150: 10~150 400: 30~400	500	± 1%	250 VAC (3A)	0.3
APSL	35: 5~35 250: 25~250	70: 10~70	400		30 VDC (4A)	0.26

Dimensions

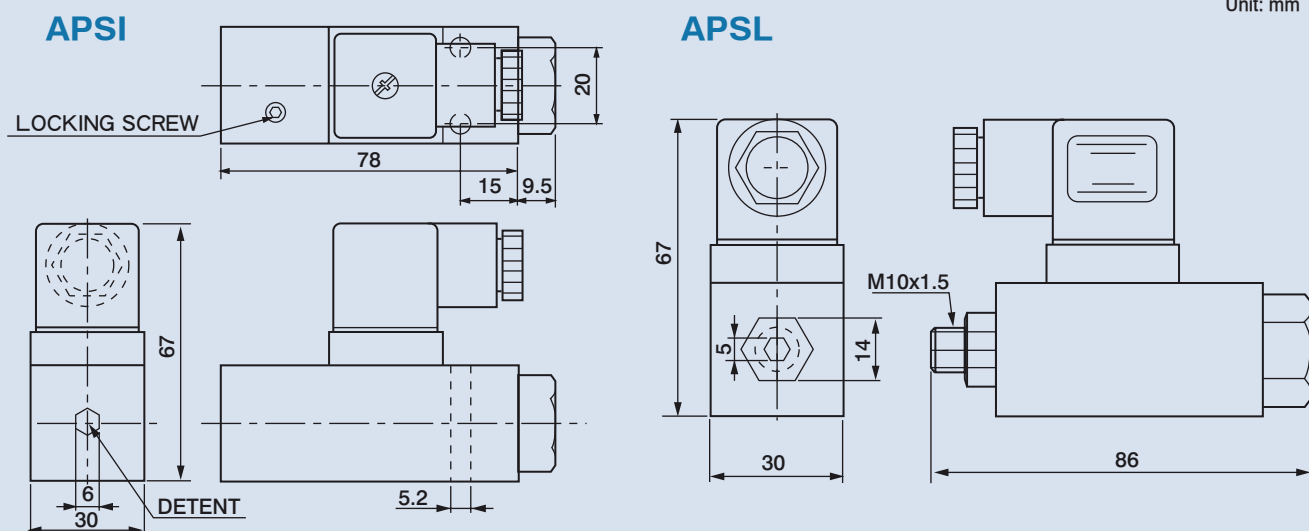

MINIATURE PRESSURE SWITCH

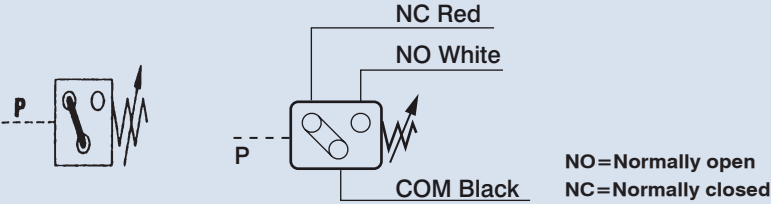

How to order


TC - 250 - 1

1	2	3
1	Model	
2	Pressure adjusting range (bar)	
3	Port size 1: 1/4"PT (RC) 2: 1/4"NPT 3: 1/4"PF (G)	

Specifications

Model	Pressure Adj. Range (bar)	Max. Pressure (bar)	Max. Voltage Current	Weight (kg)
TC-050	6~50	150	250 VAC (3A) 30 VDC (2A)	0.15
TC-100	10~100	300		0.15
TC-150	20~150	300		0.15
TC-250	30~250	350		0.15
TC-350	40~350	400		0.15

Dimensions / Performance curves

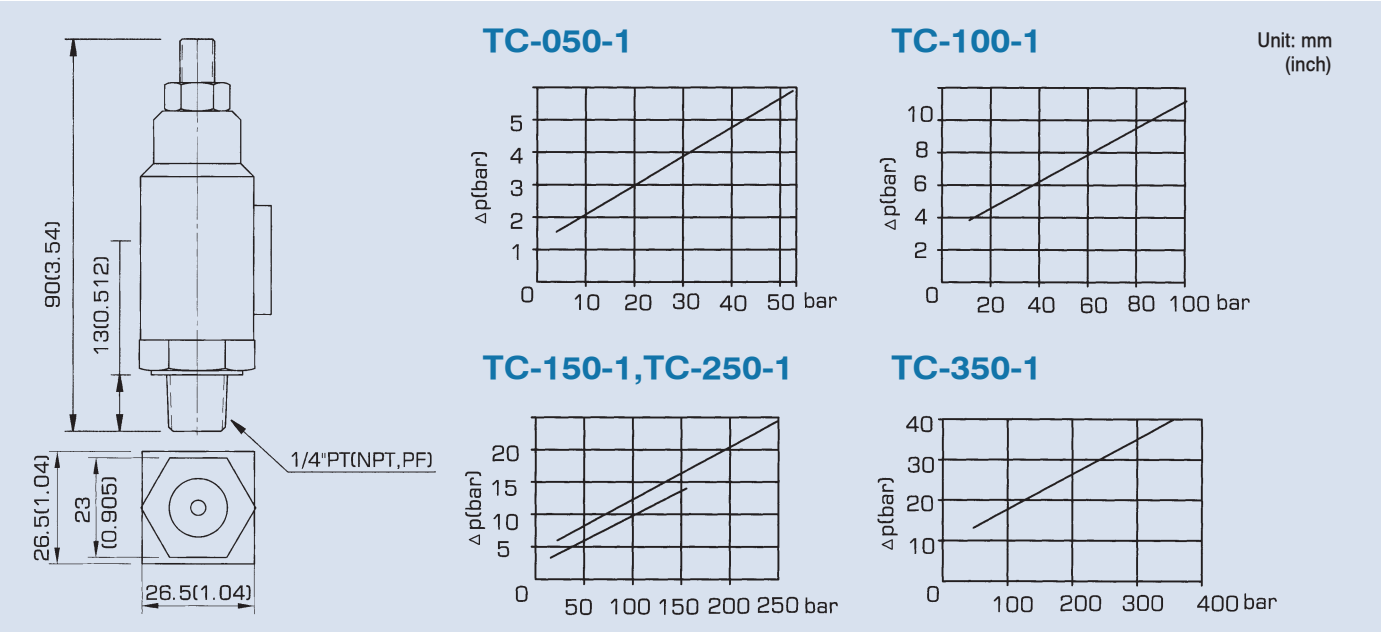

**MEXICO BRANCH OFFICE**

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com
(449) 171 3420
www.4ManPro.com/SPA/

**USA BRANCH OFFICE**

Pennzoil Place
700 Milam
Suite 1300
Houston, Tx, USA
77002

4ManPro-USA@4ManPro.com
+1 (832) 871 5022
www.4ManPro.com/ENG/

*Elements For
Manufacturing Processes*

HI HYDROME