





Threaded Connection, Hexagonal

Model: DIT-6



PRODUCT DESCRIPTION



Detachable design for easy cleaning and maintenance



Often used in cement plants and the petrochemical equipment industry

PRODUCT SPECIFICATION

Process connection

1/4, 3/8, 1/2, 3/4, 1
PT, G, NPT, M

Instrument connection

1/4, 3/8, 1/2
PT, G, NPT, M

Scale ranges

0 ... 10 bar to 0 ... 250 bar,
or all other equivalent pressure ranges

Material

Body: 316L SS
Diaphragm: 316L SS


Medium temperature

0°C ... 80°C,
81°C ... 200°C,
201°C ... 400°C

Others

Welded with instrument

DIMENSIONS

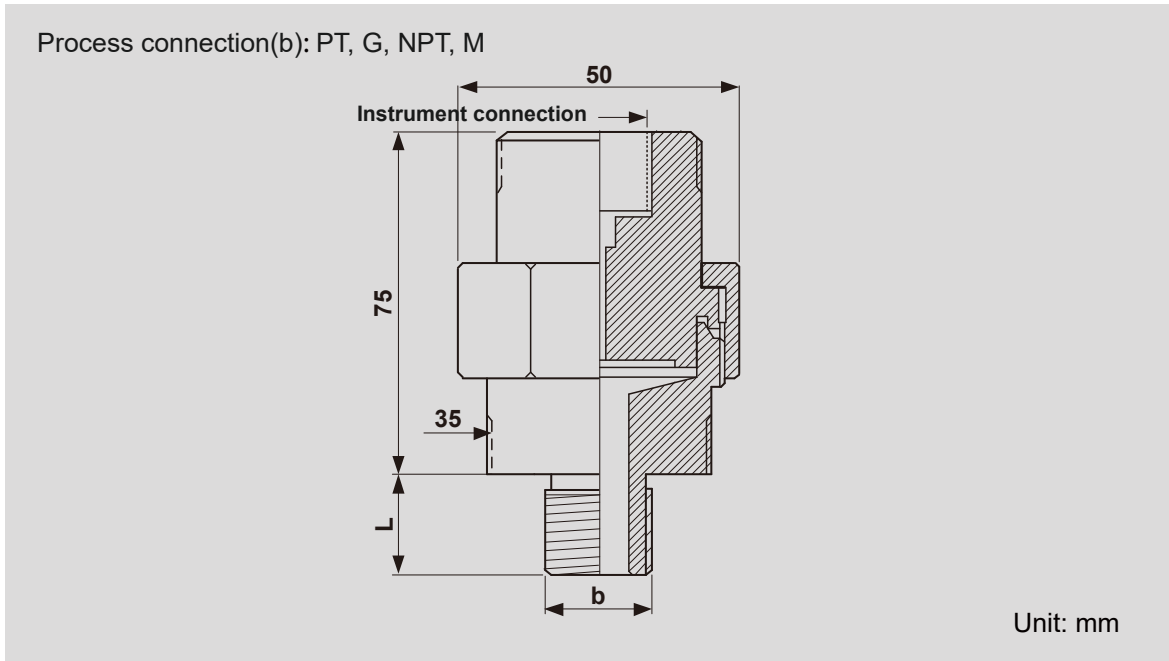

b	1/4	3/8	1/2	3/4	1
L	13	15	20	20	23



rsIMAC

Elementos For Manufacturing Processes



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com
+52 (449) 171 3420
www.4ManPro.com/SPA/

USA BRANCH OFFICE

708 Main St.
10th Floor
Houston, Tx, USA
77002

4ManPro_USA@4ManPro.com
+1 (832) 871 5022
www.4ManPro.com/ENG/