




10 Lead wire type Thermocouple probe

101 Screw-in type

102 Inseration type


103 Bayonet type

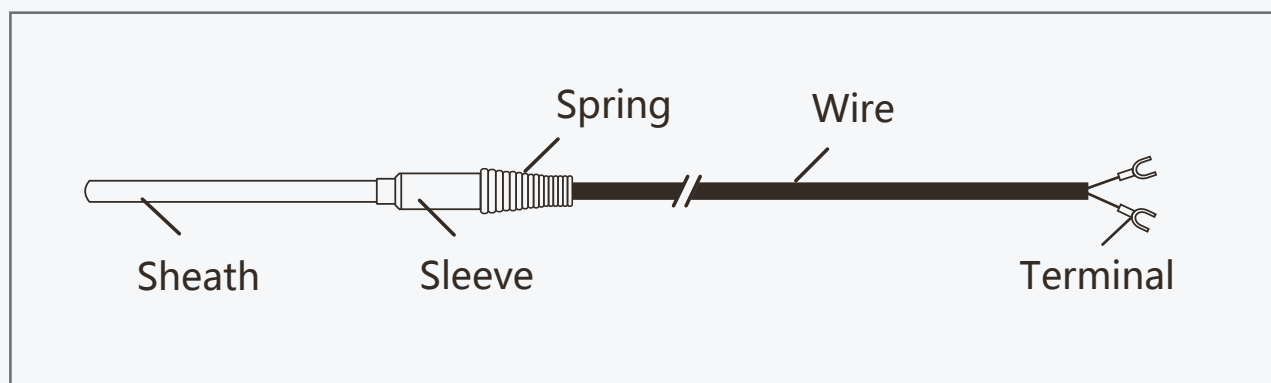

Codes for custom order configurations



10-	
Model	
1	
2	
3	
Type	
K	
J	
E	
T	
Element/Quantity	
1: Single element	
2: Dual element	
Tube diameter	
3.2D	
4.0D	
4.8D	
5.0D	
6.0D	
6.4D	
8.0D	
9.6D	
Tube length	
50mm	
100mm	
150mm	
200mm	
Other	
Tube thread	Connection
A: Mid thread	0: None
B: 1/4" 20UNC	1: Thermal casing
C: M6×1.0	2: Spring
D: M8×1.25	3: 8Ø Connection tube+Spring
E: M10×1.5	4: 12Ø Connection tube+Spring
F: M12×1.5	5: 12.5Ø(single)Buckle
G: 5/16" 18UNC	6: 12.5Ø(double)Buckle
H: 5/16" 24UNF	7: 15Ø(double)Buckle
I: 1/4" PT	
J: 3/8" PT	
K: 1/2" PT	
L: 3/4" PT	
Wire length	
1: 1M	
2: 2M	
3: 3M	
4: 4M	
5: 5M	
6: Other	
Wire material	
1: PVC	
2: Cable	
3: Teflon	
4: Glass fiber	
5: Other	
Material	
A: SUS304	
B: SUS316	
C: Titanium tube	
D: Teflon	

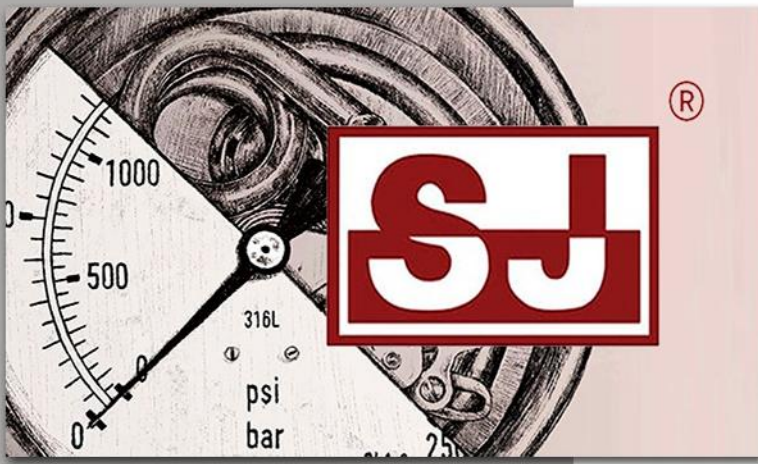

rsIMAC

Elementos For Manufacturing Purposes



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com

+52 (449) 171 3420

www.4ManPro.com/SPA/

USA BRANCH OFFICE

708 Main St.
10th Floor
Houston, Tx, USA
77002

[4ManPro_USA](mailto:4ManPro_USA@4ManPro.com)

@4ManPro.com

+1 (832) 871 5022

www.4ManPro.com/ENG/