



SJ PRD-APP



MEDIDOR CON
PLÁSTICO
ANTICORROSIVO
INTEGRADO

Integrated Anti-corrosion Plastic Type

Model: PRD-APP

Product Description

- 4-20mA or RS485 signal output for remote observation
- Digital display which allows local observation at the same time
- Corrosion resistance on both case and wetted part, mainly used in the PCB industry



Product Specification

Nominal size

2.5"

Sensor element

Zirconia

Scale range

0 ... 10 kPa to 0 ... 5 MPa, or other equivalent units of pressure, vacuum or compound

Accessories (options)

Transparent plastic cover

Accuracy $\pm 1.0\%$ F.S.**Medium temperature** $-20^{\circ}\text{C} \dots 70^{\circ}\text{C}$ **Process connection**

PP; G1/2" (F)

Voltage supply

DC15-30V

Case/Ring

Nylon


Output signal

4-20 mA, RS485


Power consumption

0.5 W

Dimensions

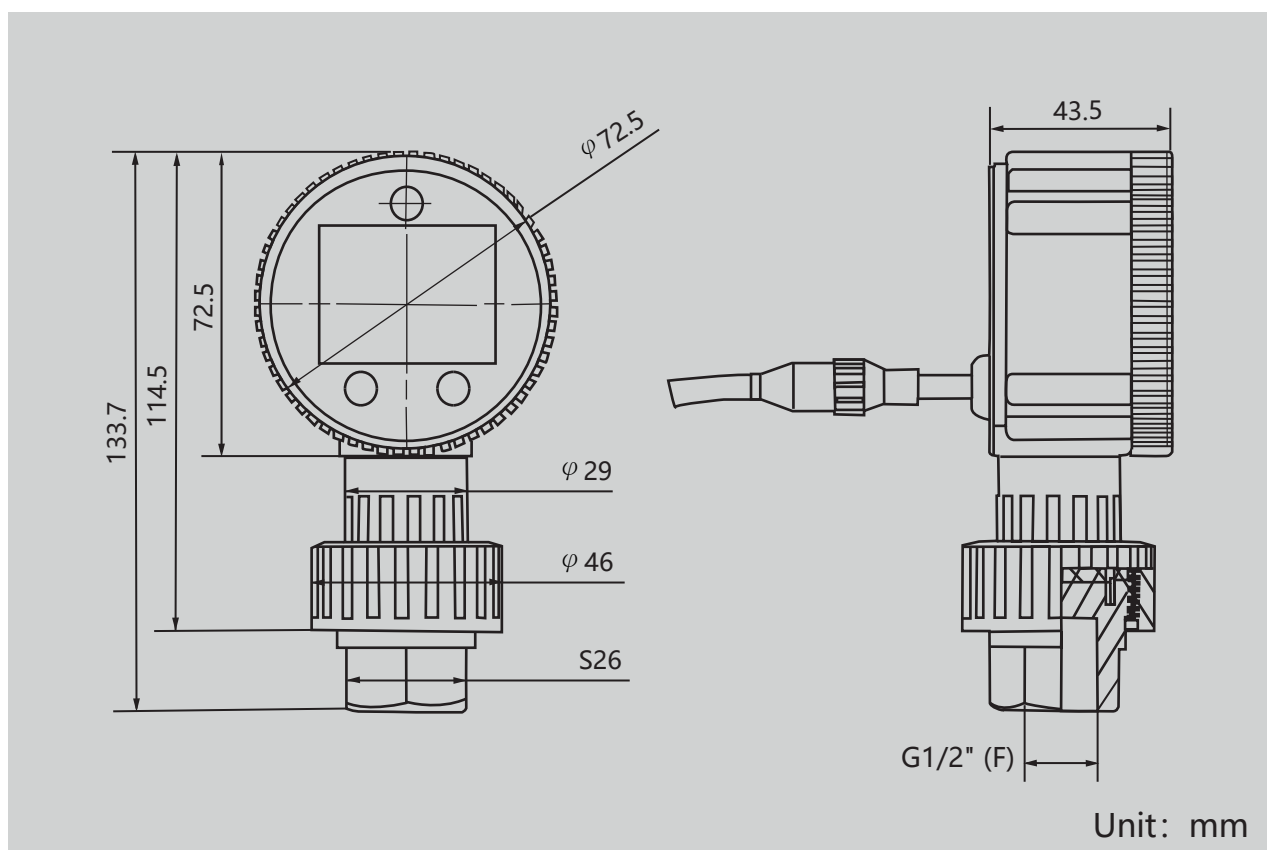

Interface Description

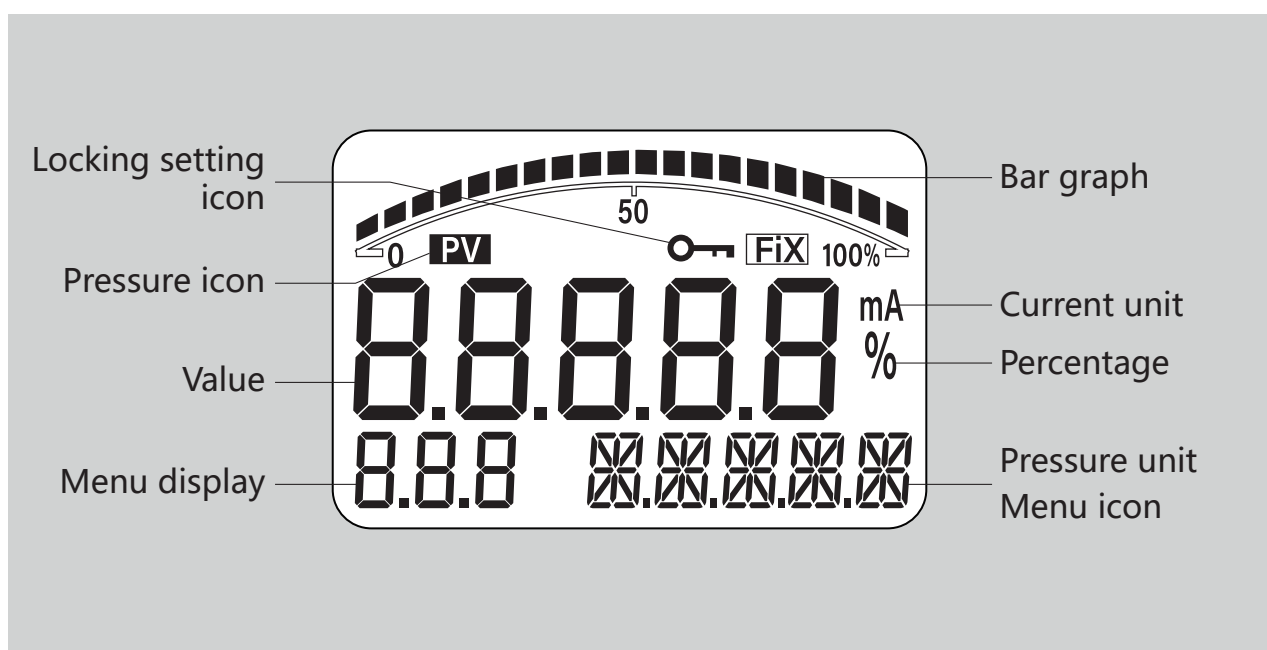

Accessories



Options

Transparent plastic cover

※ **Ordering information**

Model / Scale range / Process connection / Accessory / Output signal / Options

For any changes to the specifications of this catalogue, the latest version shall prevail.



4ManPro

*Elements For
Manufacturing Processes*



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com
(449) 171 3420
www.4ManPro.com/SPA/

*Elements For
Manufacturing Processes*



USA BRANCH OFFICE

Pennzoil Place
700 Milam
Suite 1300
Houston, Tx, USA
77002

4ManPro-USA@4ManPro.com
+1 (832) 871 5022
www.4ManPro.com/ENG/

For any changes to the specifications of this catalogue , the latest version shall prevail.

Copyright © 12/2019 by SIN JIA ENTERPRISE COMPANY LIMITED. All rights reserved.

