



SJ PRD-TG



**MEDIDOR DE
PRESIÓN
SIMPLE**

Simple Digital Pressure Gauge

Model: PRD-TG

Product Description

- Cost-effective digital pressure gauge with a short lead time
- Intuitive interface for easy operation
- For gaseous and liquid pressure media that are not highly viscous or crystallizing



Product Specification

Nominal size

2.5"

Process connection

G1/4"

Pressure medium

Non-corrosive gases and liquid

Resolution

0.2% F.S. ... 0.5% F.S.

Scale ranges

5 ... 175 psi,

The value starts to display after

0.21 kg/cm²**Burst pressure**

1.6 MPa

Medium temperature

-10°C ... 50°C

Pressure unitspsi, bar, kPa, kg/cm²**Display**

3.5 digits

LCD, switchable backlight button

Accuracy

±1.0% F.S.

Power supply

AAA battery*2 (not included)

Product Specification

Working current

0.5 mA


Functions

Long press "On/Unit/Off" button to turn on.
If the client doesn't press any buttons, the gauge will automatically turn off after 30 seconds by default.

Weight

80 g

Dimensions

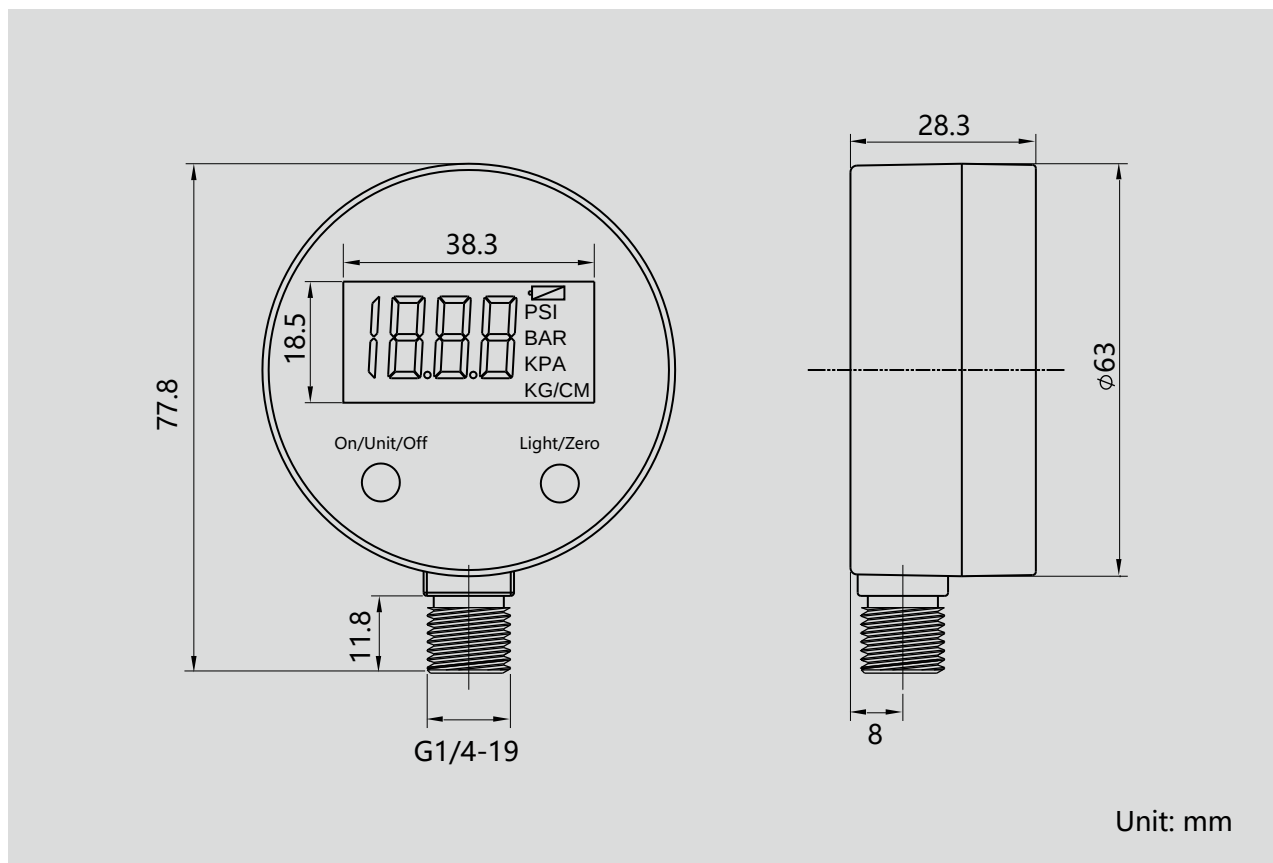

※ **Ordering information**
Model / Quantity / Options

For any changes to the specifications of this catalogue, the latest version shall prevail.



4ManPro

*Elements For
Manufacturing Processes*



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com
(449) 171 3420
www.4ManPro.com/SPA/



USA BRANCH OFFICE

Pennzoil Place
700 Milam
Suite 1300
Houston, Tx, USA
77002

4ManPro-USA@4ManPro.com
+1 (832) 871 5022
www.4ManPro.com/ENG/

*Elements For
Manufacturing Processes*

For any changes to the specifications of this catalogue , the latest version shall prevail.

Copyright © 12/2019 by SIN JIA ENTERPRISE COMPANY LIMITED. All rights reserved.

