





Thermowell for Thermometer, Flanged

Model: TWF



PRODUCT DESCRIPTION



Can be installed on bimetal thermometers,
thermometer pointers, and thermocouples



Suitable for high process and high chemical loads

PRODUCT SPECIFICATION

Version

Fabricated from pipe,
machined from solid bar stock

Type

Straight, tapered, stepped

Connection to thermometer

1/4, 3/8, 1/2, 3/4

PT, G, NPT, M

Type of process connection

JIS, ANSI, DIN

Nominal diameter

1/2", 3/4", 1", 1 1/4", 1 1/2", 2", 3"

Pressure rating

ANSI: 150, 300, 600LB...

JIS: 5, 10, 16K...

DIN: PN6, 10, 16...

Thermowell

Material: 304 SS, 316 SS


Length: can be customized

Diameter: 9.5, 10, 12, 15 mm

Accessories (option)

Coating, bushing

DIMENSIONS

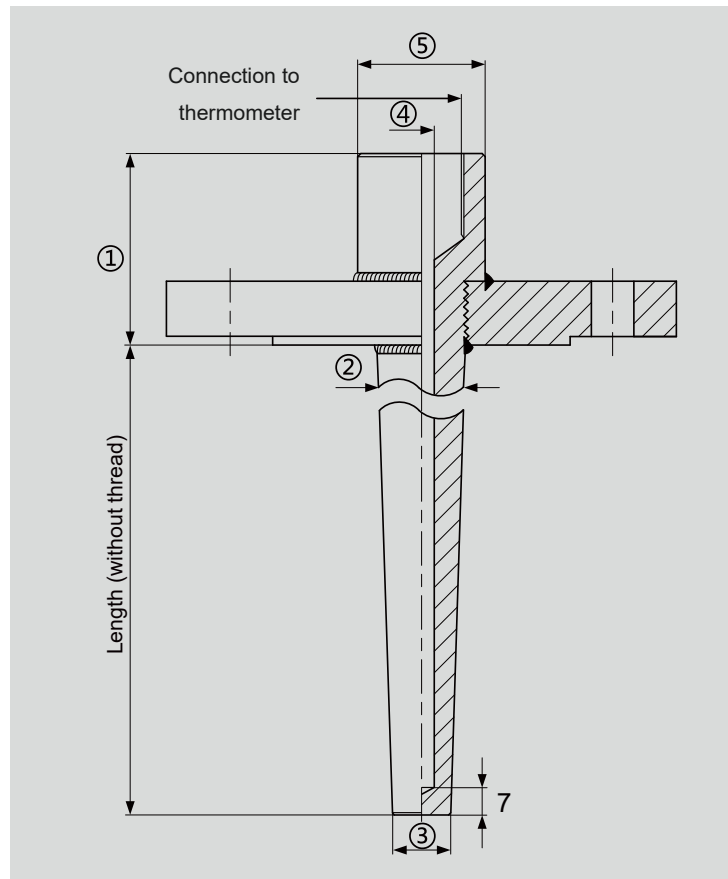

Nominal diameter	Pressure rating	Dimensions (mm)				
		①	②	③	④	⑤
1"	150	55	22	15	7 / 9	28
	300	55	22	15	7 / 9	28
	600	55	22	15	7 / 9	28
	1500	85	22	15	7 / 9	28
1 1/2"	150	55	25	19	7 / 9	28
	300	55	25	19	7 / 9	28
	600	55	25	19	7 / 9	28
	1500	85	25	19	7 / 9	28
2"	150	55	25	19	7 / 9	28
	300	55	25	19	7 / 9	28
	600	55	25	19	7 / 9	28
	1500	85	25	19	7 / 9	28



rsIMMA

Elementos For Manufacturing Processes



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com

+52 (449) 171 3420

www.4ManPro.com/SPA/

USA BRANCH OFFICE

708 Main St.
10th Floor
Houston, Tx, USA
77002

4ManPro_USA@4ManPro.com

+1 (832) 871 5022

www.4ManPro.com/ENG/