





Digital Pressure Gauge, Display and Output Signal

Model: MXT



PRODUCT DESCRIPTION

- ▼ 4-20mA signal output for remote monitoring
- ▼ Digital display which allows local observation at the same time
- ▼ LED digital panel with high brightness and a wide viewing angle

PRODUCT SPECIFICATION

Connection location

Bottom mount

Voltage supply

DC16-32V

Electrical connection

2P aviation plug

Output signal

4-20mA

Nominal size

2.5"

Protection level

IP 40

Scale ranges

0 ... 5 kPa to 0 ... 100 MPa,
or other equivalent units of pressure,
vacuum or compound

Pressure units

The unit can be specified before
shipment. If unit conversion is required,
it must be reset at the factory.

Accuracy

±1.0% F.S.,
±0.5% F.S.,
±0.25% F.S

Process connection

304 SS, 316 SS
1/4, 3/8, 1/2
PT, G, NPT

Case/Ring

304 SS

Panel

PVC

Medium temperature

-20°C ... 60°C

Display

4 digits

Response time


≥ 5 Hz


Data acquisition rate

30 Hz

The product images displayed in the catalog are illustrative,
and the actual products will be customized to your requirements.

DIMENSIONS

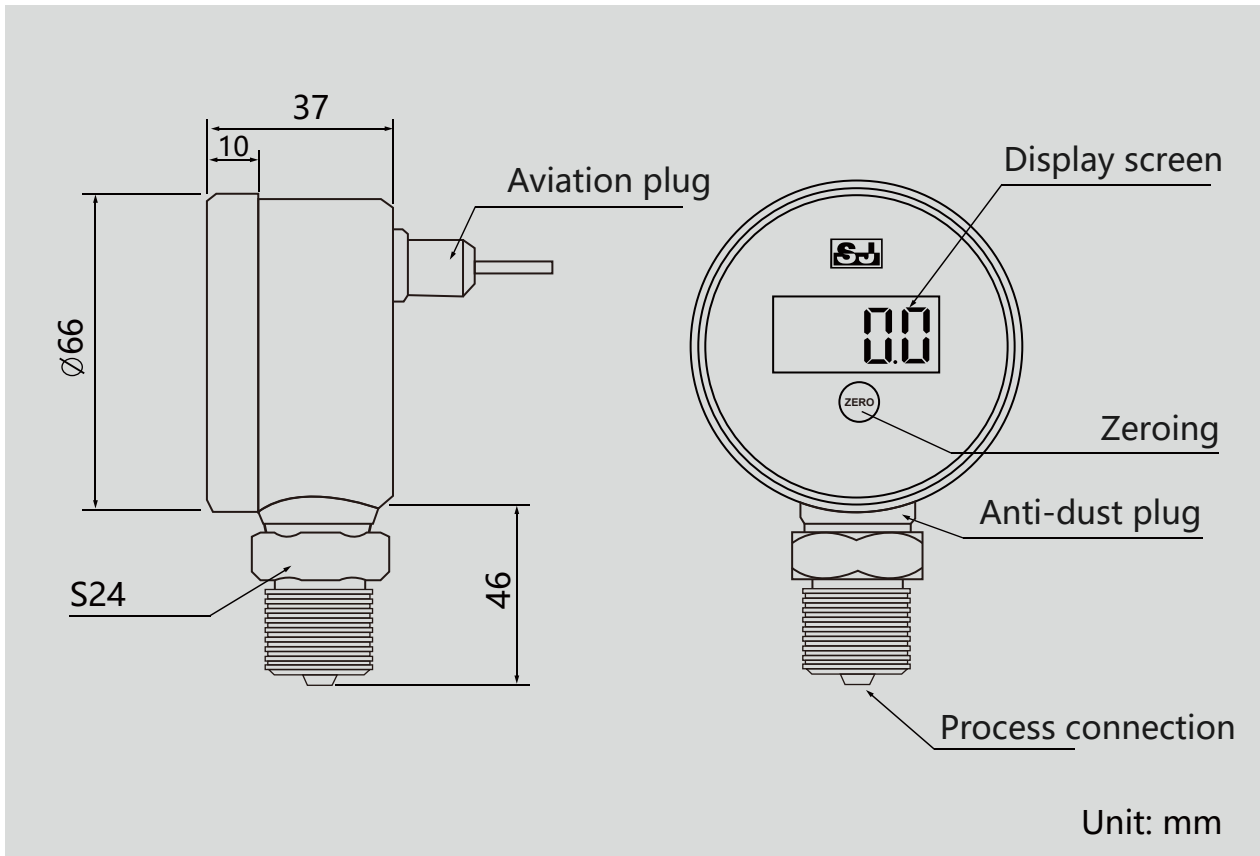

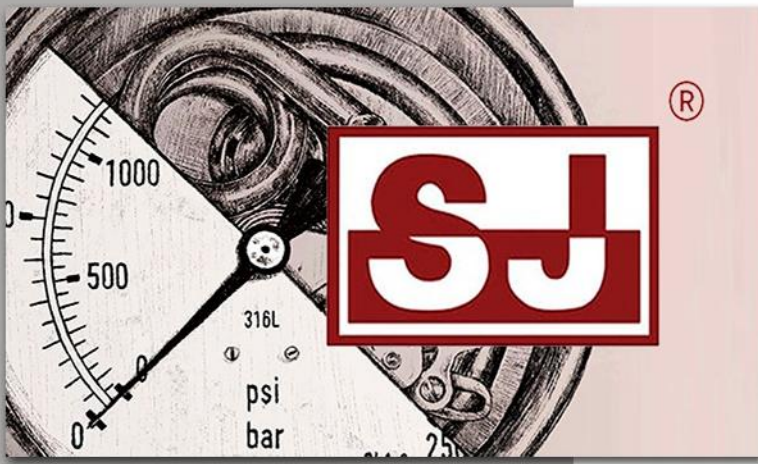

rsIMAC

Elementos For Manufacturing Purposes



MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com

+52 (449) 171 3420
www.4ManPro.com/SPA/

USA BRANCH OFFICE

708 Main St.
10th Floor
Houston, Tx, USA
77002

4ManPro_USA@4ManPro.com

+1 (832) 871 5022
www.4ManPro.com/ENG/