

SJ PRDD







DUPLEX PRESSURE GAUGE

Duplex Pressure Gauge

Model: PRDD

Product Description

- The pressure gauges are equipped with two independently working bourdon tube measuring systems
- LED lighting for operating voltages of DC24V or AC110V
- Typically used in filters and rail braking systems



Product Specification

Connection location

Lower back mount

Nominal size

4"

Scale ranges

0 ... 25bar, or other equivalent units of pressure, vacuum or compound

Accuracy

±1.6% F.S.

Process connection

M14 x 1.5

Case/Ring

Carbon steel

Window

Glass

Dial

Aluminum, white, black lettering

Pointer

Aluminum, black and red

Movement

Copper alloy

Bourdon tube

Copper alloy

Ambient temperature

-29°C ... 93°C



Product Specification


Medium temperature

-30°C ... 70°C

Lighting power supply

DC24V, AC110V

Dimensions

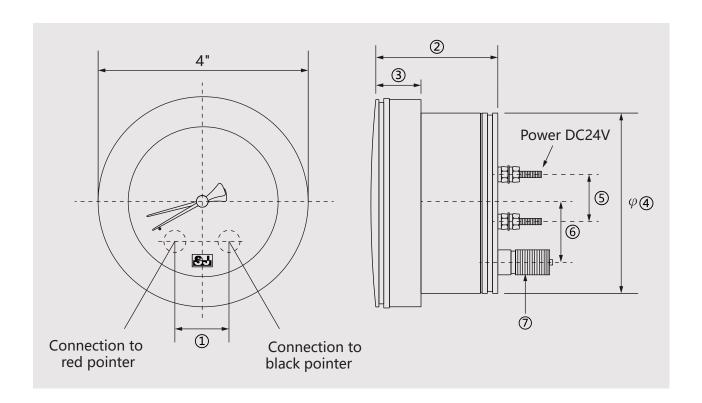

Dimensions (mm)								
NS	1	2	3	4	(5)	6	7	
4"	34	65	28	100	25	29	M14x1.5	

Model / Scale ranges / Process connection / Lighting power supply / Options

For any changes to the specifications of this catalogue, the latest version shall prevail.







MEXICO BRANCH OFFICE

Roberto Diaz No. 401 Ciudad Industrial Aguascalientes, Ags. México 20290

(449) 171 3420 www.4ManPro.com/SPA/



USA BRANCH OFFICE Pennzoil Place 700 Milam Suite 1300 Houston, Tx, USA 77002

+1 (832) 871 5022 www.4ManPro.com/ENG/

Aemonto For Manufacturing Processes

For any changes to the specifications of this catalogue, the latest version shall prevail. Copyright © 12/2019 by SIN JIA ENTERPRISE COMPANY LIMITED. All rights reserved.

