



SJ PRDD

**MEDIDOR
DE
PRESIÓN
DÚPLEX**



Duplex Pressure Gauge

Model : PRDD

Product Description

- The pressure gauges are equipped with two independently working bourdon tube measuring systems
- LED lighting for operating voltages of DC24V or AC110V
- Typically used in filters and rail braking systems



Product Specification

Connection location

Lower back mount

Window

Glass

Nominal size

4"

Dial

Aluminum, white, black lettering

Scale ranges

0 ... 25bar, or other equivalent units of pressure, vacuum or compound

Pointer

Aluminum, black and red

Accuracy

±1.6% F.S.

Movement

Copper alloy

Process connection

M14 x 1.5

Bourdon tube

Copper alloy

Case/Ring

Carbon steel

Ambient temperature

-29°C ... 93°C

Product Specification


Medium temperature

-30°C ... 70°C

Lighting power supply

DC24V, AC110V

Dimensions

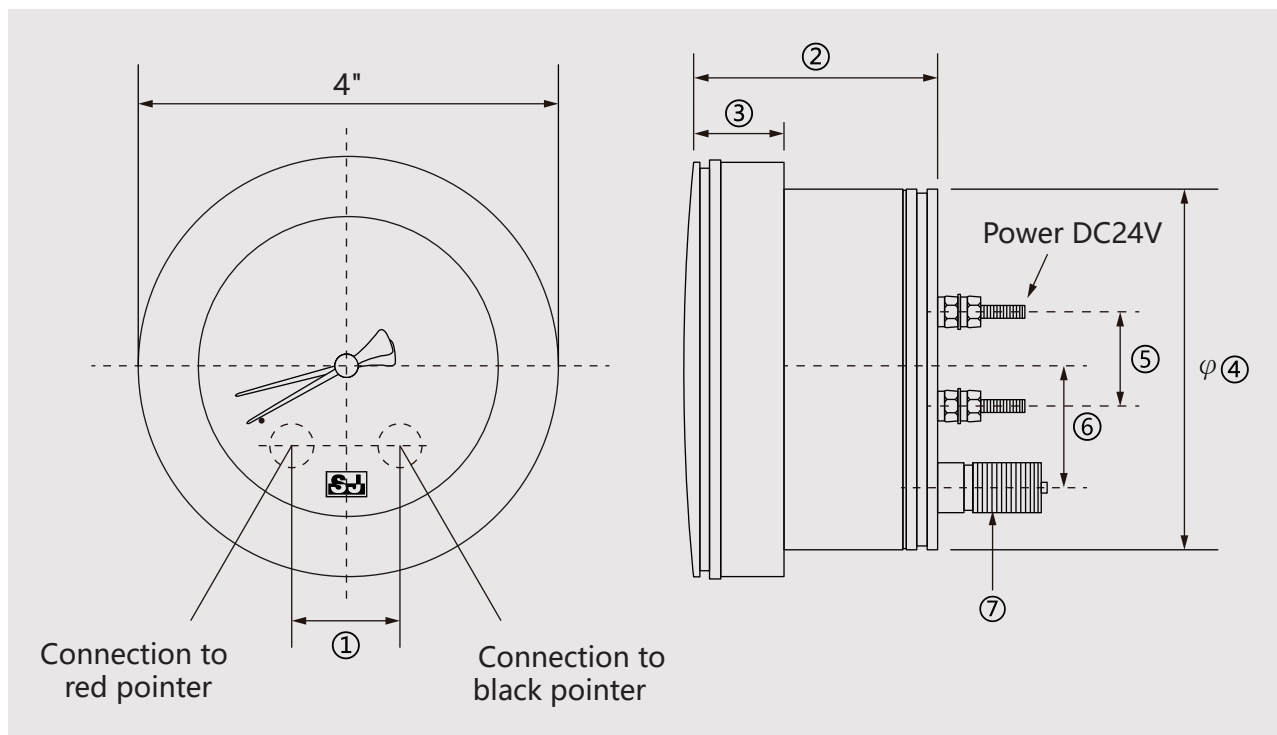

Dimensions (mm)							
NS	①	②	③	④	⑤	⑥	⑦
4"	34	65	28	100	25	29	M14x1.5

※ Ordering information

Model / Scale ranges / Process connection / Lighting power supply / Options

For any changes to the specifications of this catalogue, the latest version shall prevail.



4ManPro

*Elements For
Manufacturing Processes*



4ManPro
Mexico Branch Office

Elements For Manufacturing Processes

MEXICO BRANCH OFFICE

Roberto Diaz No. 401
Ciudad Industrial
Aguascalientes, Ags.
México
20290

4ManPro@4ManPro.com
(449) 171 3420
www.4ManPro.com/SPA/



USA BRANCH OFFICE

Pennzoil Place
700 Milam
Suite 1300
Houston, Tx, USA
77002

4ManPro-USA@4ManPro.com
+1 (832) 871 5022
www.4ManPro.com/ENG/

*Elements For
Manufacturing Processes*

For any changes to the specifications of this catalogue , the latest version shall prevail.

Copyright © 12/2019 by SIN JIA ENTERPRISE COMPANY LIMITED. All rights reserved.

